

**NOBLE ENERGY INC.**  
 WILHITE 30-34  
 SESW 30-7N-64W  
 845 FSL & 1936 FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 12/22/2014

API: 05-123-24807  
 COGCC #


GL Elev: 4847'  
 KB Elev: 4859'

Spud Date: 10/18/2007

**Surface Casing :**  
 8 5/8" 24# @ 656'  
 Cement: 370  
 TOC: Surface

TOC @ 6310'

**Production Casing :**  
 4 1/2" 11.6# @ 7288'  
 Cement: 153  
 TD: 10/23/2007

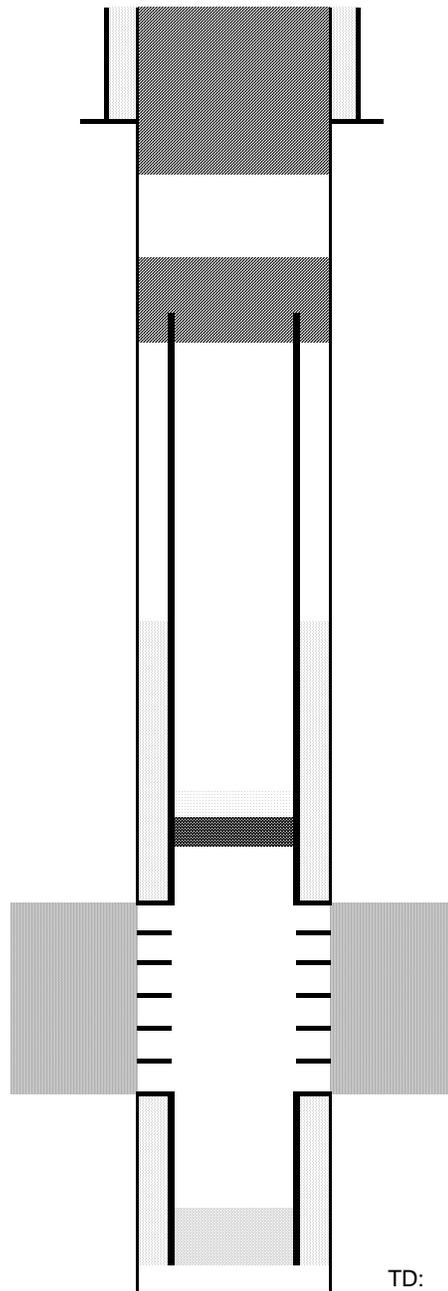

Cut surface casing off 6'-8' below surface.

Pump approx 285 sx shoe plug @ 736'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 7124' w/ 2 sx cement on top

Codell Perforations 7174' - 7188'

TD: 7319'