

**NOBLE ENERGY INC.**  
 BIRD R K 20-07  
 SWNE 20-4N-66W  
 2000 FNL & 1937 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 12/22/2014

API: 05-123-12662  
 COGCC #

GL Elev: 4746'  
 KB Elev: 4758'


Spud Date: 9/21/1985

**Surface Casing :**  
 8 5/8" 24# @ 300'  
 Cement: 225  
 TOC: Surface

**Production Casing :**  
 4 1/2" 11.6# @ 7350'  
 Cement: 220  
 TD: 9/29/1985

**TOC @ 6330'**

**Nio Top 6923'**

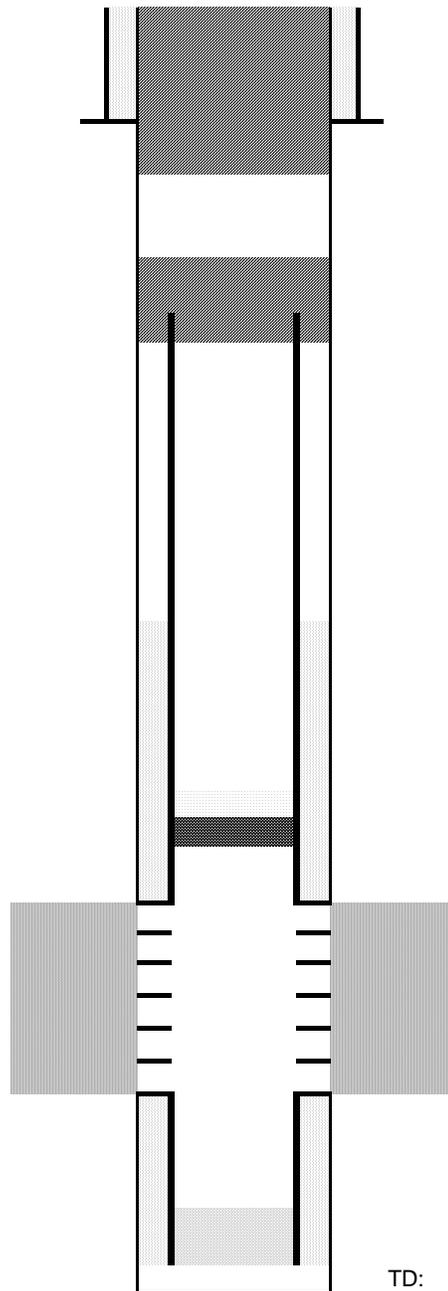

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 490'  
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 6894' w/ 2 sx cement on top

Niobrara Perforations 6944' - 7180'

Codell Perforations 7259' - 7277'

TD: 7358'