

NOBLE ENERGY INC.
 ART RED D09-03J
 SWSW 9-3N-64W
 990 FSL & 990 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 12/31/2014

API: 05-123-16284
 COGCC #


GL Elev: 4733'
 KB Elev: 4744'

Spud Date: 11/10/1992

Surface Casing :
 8 5/8" 24# @ 457'
 Cement: 140
 TOC: Surface

Production Casing :
 2 7/8" 6.5# @ 4511'
 Cement: 520
 TD: 11/16/1992

TOC @ 3150'

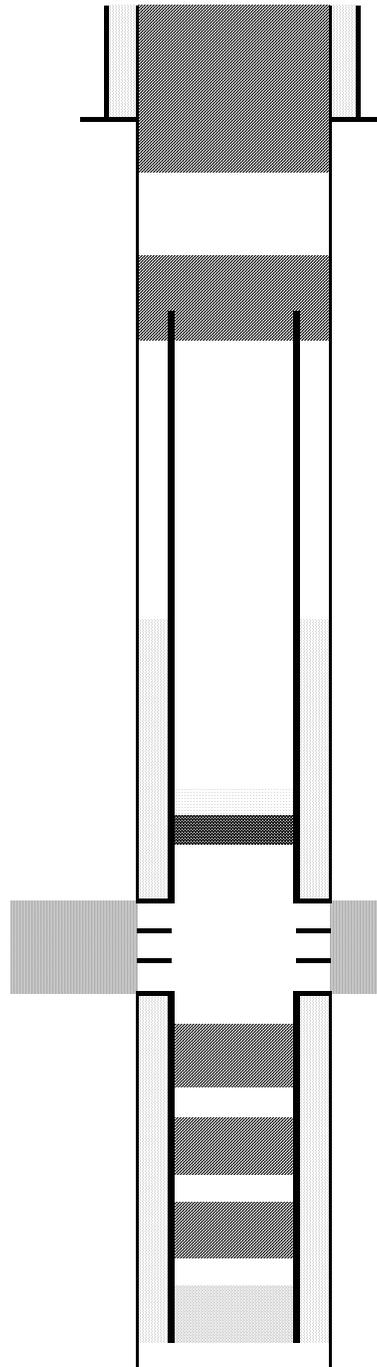

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug @ 623'
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 4233' w/ 2 sx cement on top

Sussex Perforations 4283' - 4331'

Cement Plug 4511' - 4596'

Cement Plug 6568' - 6670'

Cement Plug 7283' - 7410'

TD: 7552'