

**NOBLE ENERGY INC.**  
**MOSSBERG 30-15H6**  
**SWSE 30-5N-66W**  
**673' FSL & 2000' FEL**  
**WELD COUNTY, CO**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**1/13/2015**

API: 05-123-18112  
 COGCC #

GL Elev: 4888'  
 KB Elev: 4900'


**Spud Date:**

**Surface Casing :**  
 8 5/8" 23 lb set @ 535'  
 Cement: 335  
 TOC: Surface

**TOC @ 3825' (CBL)**

**Nio Top 6934'**

**Production Casing :**  
 3 1/2" 7.7# J-55 set @ 7542'  
 Cement: 185  
 TD: 4/10/2005

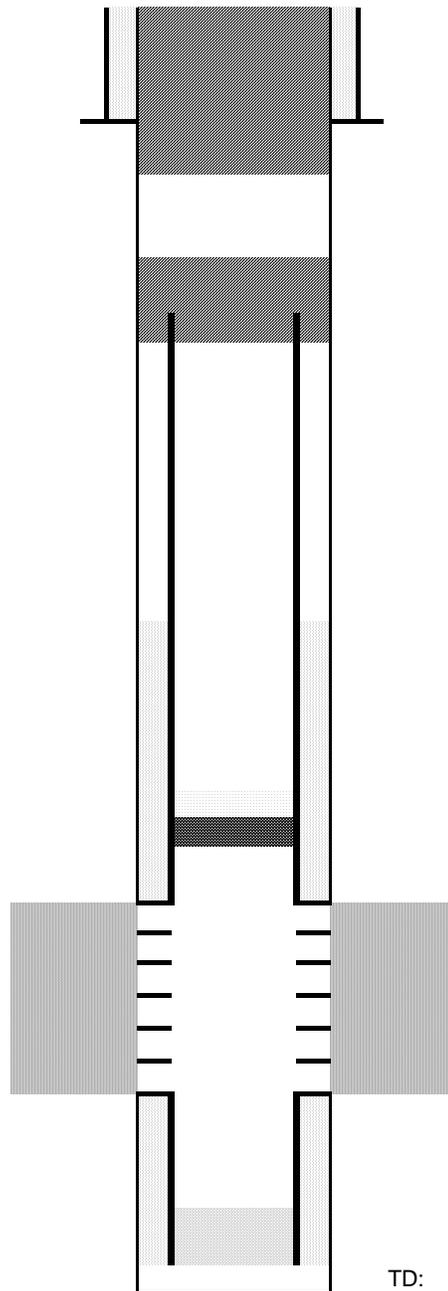

Cut surface casing off 6'-8' below surface.

Pump approx 400 sx shoe plug @ 1050'  
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 7001' w/ 2 sx cement on top

Niobrara Perforations: 7051' - 7174'

Codell Perforations: 7349' - 7358'

TD: 7555'