


**NOBLE ENERGY INC.**  
 Herbst 27-05  
 SESE 27-5 N-64 W  
 660 FSL & 660 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 1/21/2015

API: 05-123-12920  
 COGCC #

GL Elev: 4640  
 KB Elev: 4651

**Spud Date:** 12/30/1985

**Surface Casing :**  
 8-5/8" 24 lb/ft @ 322'  
 Cement: 11  
 TOC: Surface

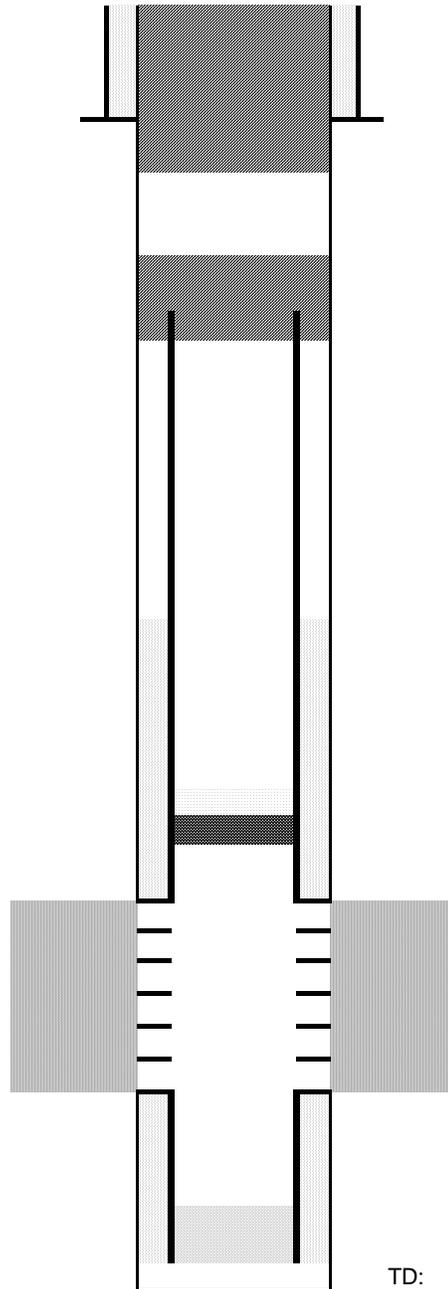

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 422'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

TOC @ 5884'

**Production Casing :**  
 4-1/2" 11# @ 6893'  
 Cement: 230  
 TD date: 1/7/1986

CIBP @ 6460' w/ 2 sx cement on top

Niobrara Perforations (6510-6524', 6600-6717', 6669-6687')

Codell Perforations (6782-6795')

TD: 6905'

)