

**NOBLE ENERGY INC.**  
 KOHLER 21-10G6  
 NWSE 21-6N-66W  
 1976 FSL & 1987 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 1/22/2015

API: 05-123-17627  
 COGCC #

GL Elev: 4745'  
 KB Elev: 4759'

**Spud Date:**

**Surface Casing :**


7" 17 lb set @ 418'  
 Cement: 172  
 TOC: Surface

**TOC @ 6183' (CBL)**

**Nio Top 6823'**

**Production Casing :**

4 1/2" 11.6# set @ 7278'  
 Cement: 62  
 TD: 10/17/1994

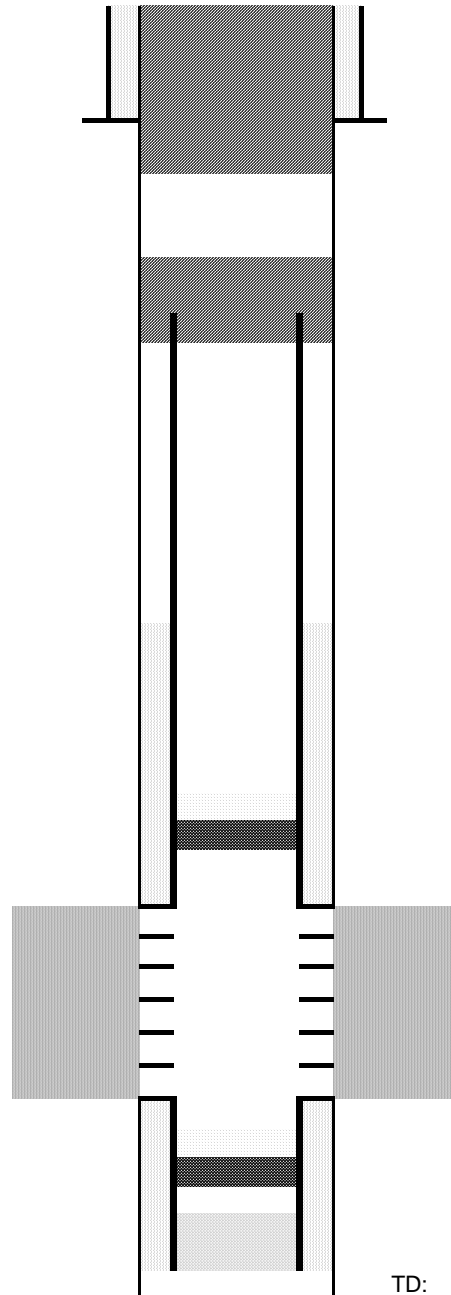

Cut surface casing off 6'-8' below surface.

Pump approx 150 sx shoe plug @ 518'  
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 6768 w/ 2 sx cement on top

TEST: Sharon Springs, Nio, Ft Hayes Perfs: 6818' - 7133'

Codell Perforations: 7148' - 7165'

CIBP @ 7186' w/ 2 sx cement on top (12/21/1994)

TEST: Greenhorn perforations: 7225' - 7226'

TD: 7281'