

NOBLE ENERGY INC.
 LARSON A25-14
 SESW 25-6N-64W
 664' FSL & 1941' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/5/2015

API: 05-123-14733
 COGCC #

GL Elev: 4623'
 KB Elev: 4633'


Spud Date: 9/5/1990

Surface Casing :
 8 5/8" 24# @ 256'
 Cement: 280 sx
 TOC: Surface

Casing Repair Cement from 3000' to 5212'
 Casing Patch @ 5207'

TOC @ 6176'

Production Casing :
 2 7/8" 6.5# @ 6907'
 Cement: 235 sx
 TD: 9/11/1990

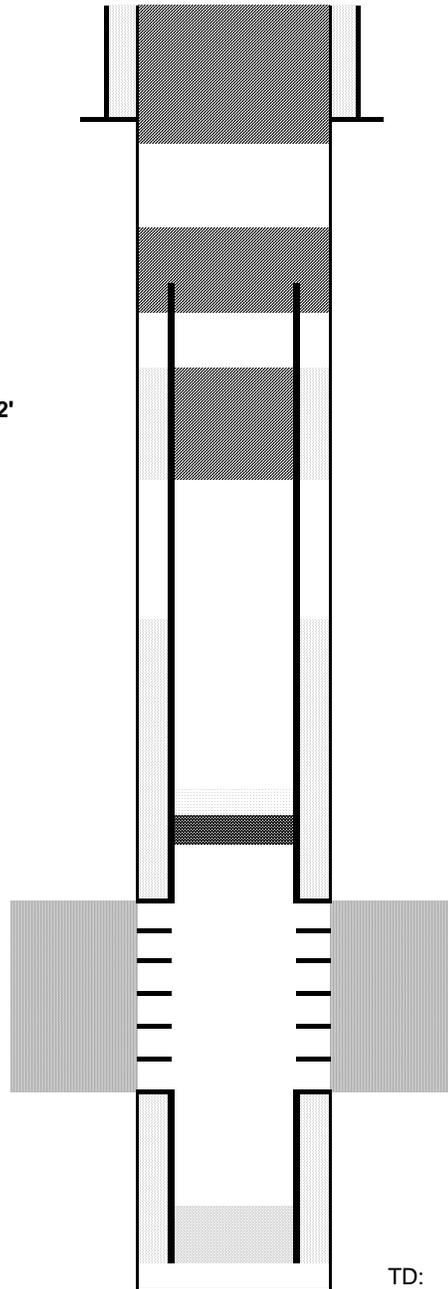

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 500'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 60 sx balance plug @ 5200'

CIBP @ 6594' w/ 2 sx cement on top

Niobrara Perforations 6644' - 6744'

Codell Perforations 6789' - 6796'

TD: 6953'