

NOBLE ENERGY INC.
 STATE A36-16
 SESE 36-5N-64W
 610 FSL & 660 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/11/2015

API: 05-123-14779
 COGCC #

GL Elev: 4647'
 KB Elev: 4637'


Spud Date:

Surface Casing :
 8-5/8" 24# K-55 @ 321'
 Cement: Surface to 321'
 TOC: Surface

TOC @ 5814'

Nio Top

Production Casing :
 2-7/8" 6.5# N-80 @ 6930'
 Cement: 240
 TD: 10/18/1990

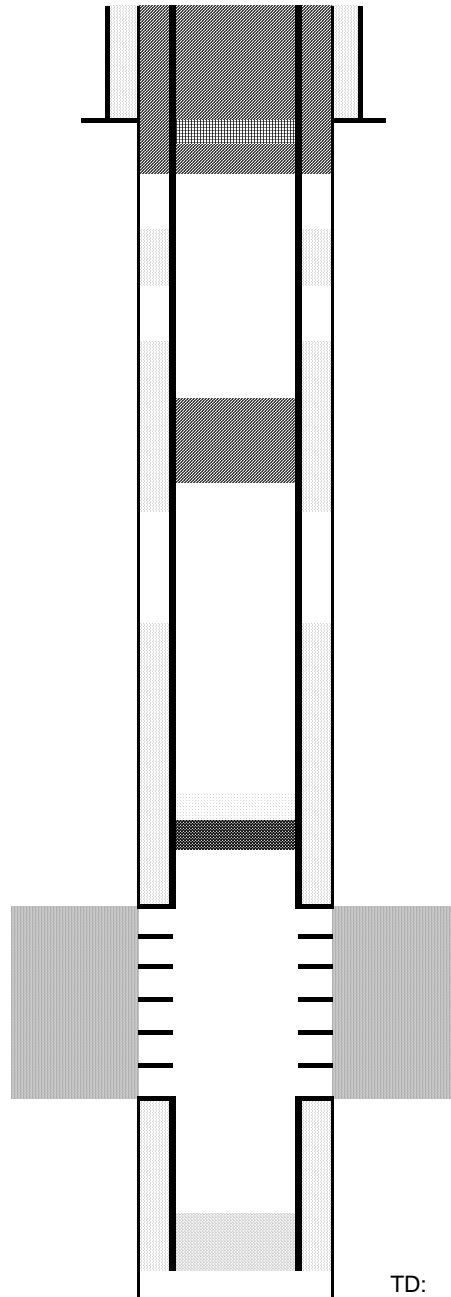

Cut surface casing off 6'-8' below surface.

Perf 2-7/8" @ 321'. Set CICR @ 421"
 Pump 120 sx through and 10 sx on top
 Will bring cement to surface.

Pump 10 sx balance plug
 at 5335' tag top of plug ~5035'

CIBP @ 6709' w/ 2 sx cement on top

Niobrara Perforations (N/A)

Codell Perforations 6759-6771'

TD: 6935'