

NOTE: Earthwork Calculations Require a Fill @ the #506-3304H Location Stake For Balance. All Fill is to be Compacted to a Minimum of 95% of the Maximum Dry Density Obtained by AASHTO Method t-99.

FINISHED GRADE ELEVATION = 5470.8'

NOTES:

- Flare Stack is to be located a min. of 100' from the wellhead.
- Round corners at 35' radius or as needed.
- Contours shown at 2' intervals.

EOG RESOURCES, INC.

**FOX CREEK 33 NWNW
SECTION 33, T12N, R63W, 6th P.M.
NW 1/4 NW 1/4**





DRAWN BY: J.P.	DATE DRAWN: 11-05-14
SCALE: 1" = 80'	REVISED: 00-00-00

CONSTRUCTION LAYOUT FIGURE #1



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

1" = 40'
 X-Section Scale
 1" = 100'

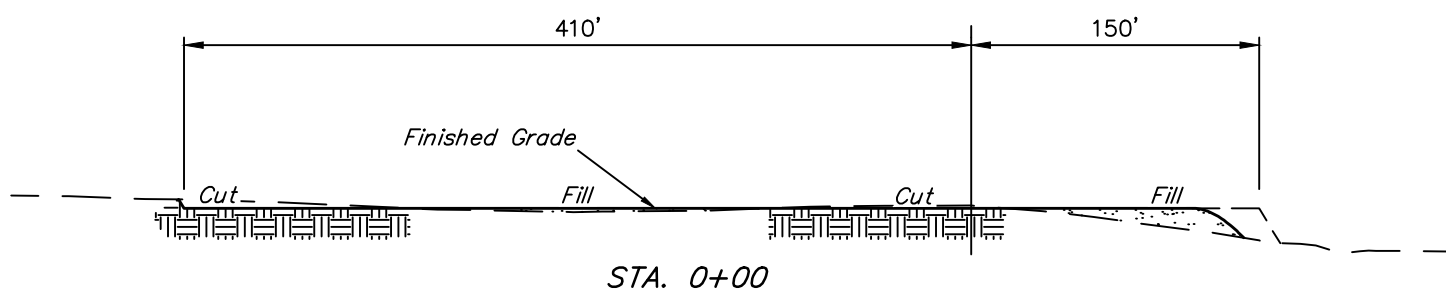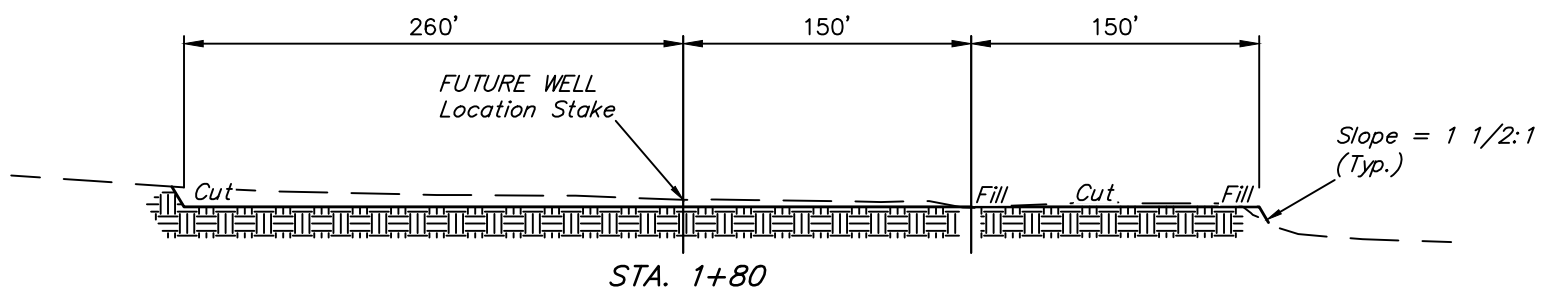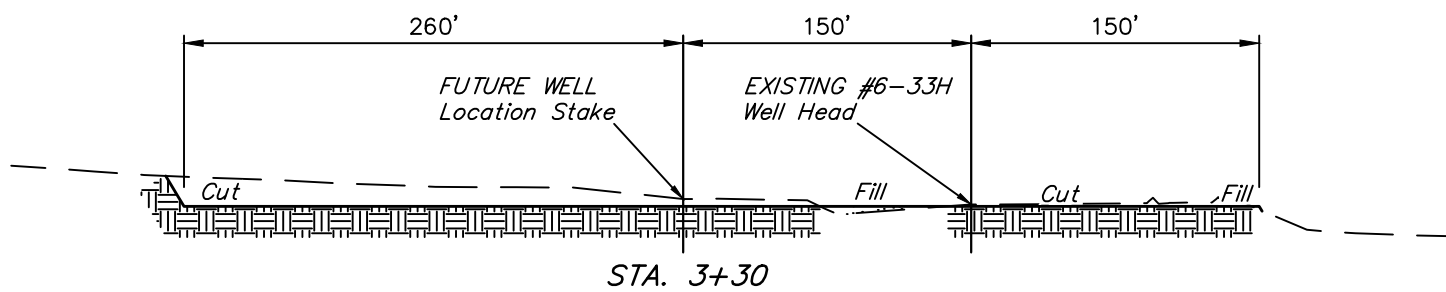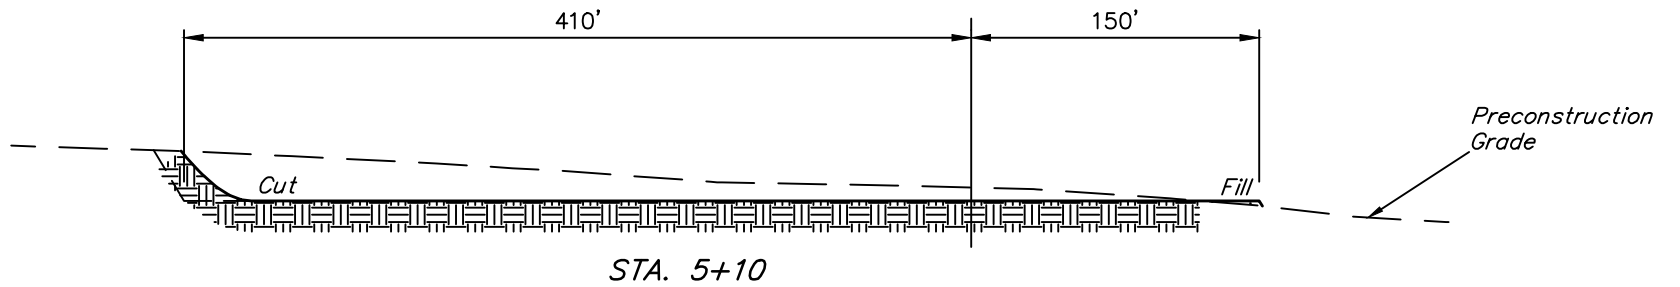

APPROXIMATE EARTHWORK QUANTITIES	
(6") TOPSOIL STRIPPING	4,210 Cu. Yds.
REMAINING LOCATION	19,270 Cu. Yds.
TOTAL CUT	23,480 Cu. Yds.
FILL	3,070 Cu. Yds.
EXCESS MATERIAL	20, 410 Cu. Yds.
TOPSOIL	4,210 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	16,200 Cu. Yds.

APPROXIMATE SURFACE DISTURBANCE AREAS		
	DISTANCE	ACRES
WELL SITE DISTURBANCE	NA	±9.126
60' WIDE ACCESS ROAD R-O-W DISTURBANCE	±0'	±0.000
TOTAL SURFACE USE AREA		±9.126

- NOTES:**
- Fill quantity includes 5% for compaction.
 - Calculations based on 6" of topsoil stripping.
 - Topsoil should not be stripped below finished grade on substructure area.

EOG RESOURCES, INC.

**FOX CREEK 33 NWNW
 SECTION 33, T12N, R63W, 6th P.M.
 NW 1/4 NW 1/4**



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

DRAWN BY: J.P.	DATE DRAWN: 11-05-14
SCALE: AS SHOWN	REVISED: 00-00-00
CONSTRUCTION LAYOUT CROSS SECTIONS	FIGURE #2