

**NOBLE ENERGY INC.**  
**KAMMERZELL K 6-10**  
**NWSE 6-4N-66W**  
**2025' FSL & 2087' FEL**  
**WELD COUNTY, CO**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**3/2/2015**

API: 05-123-24421  
 COGCC #

GL Elev: 4709'  
 KB Elev: 4722'

**Spud Date:**

**Surface Casing :**

8 5/8" 24# @ 485'

Cement: 305

TOC: Surface

**TOC @**


**Nio Top**

**Production Casing :**

4 1/2" 11.6# M-80 @ 7344'

Cement: 970

TD: 2/21/2007

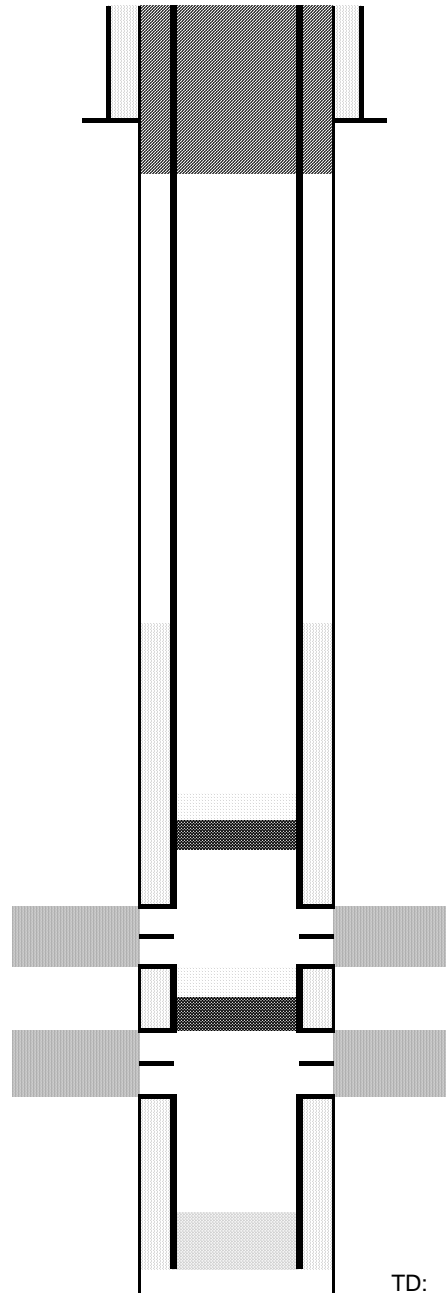

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug circulate from surface  
 Will bring cement to surface.

Perforate @ 585'

CIBP @ 6292' w/ 2 sx cement on top

Tee Pee Buttes Perforations 6342' - 6390' (Squeezed with

CIBP @ 7140' w/ 2 sx cement on top

Codell Perforations 7190' - 7206'

TD: 7361'

150 sx G cmt)