

NOBLE ENERGY INC.
 Wilkinson 1
 SENE 35-5N-65W
 1980 FNL & 660 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/3/2015

API: 05-123-12057
 COGCC #

GL Elev: 4,691.00
 KB Elev: 4,702.00


Spud Date:

Surface Casing :
 8-5/8", 24.00 ppf, J-55 @ 436'
 Cement: 160 sxs
 TOC: Surface

TOC @ 6,344'

Nio Top 6,684'

Production Casing :
 4-1/2", 11.60 ppf, N-80 @ 7,109'
 Cement: 155 sxs
 TD: Original 10/31/1984, Patch 3/13/2000

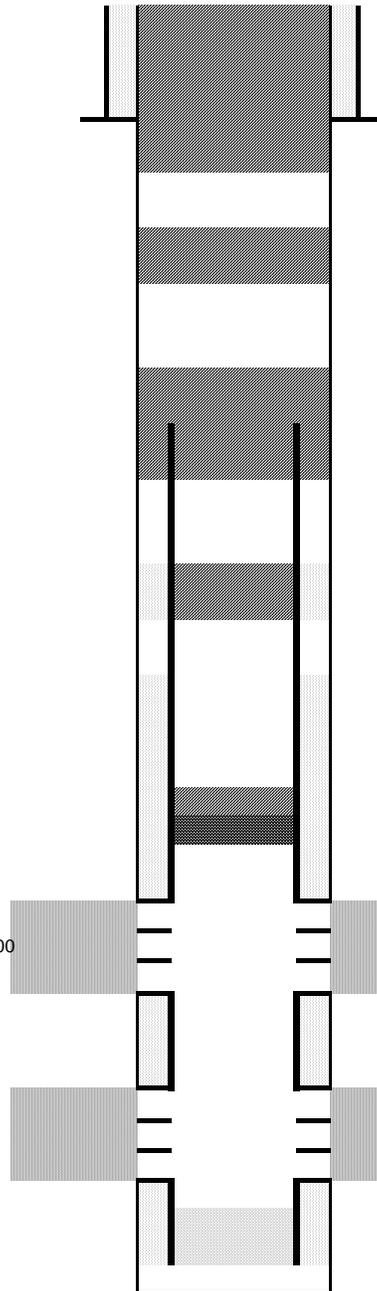

Cut surface casing off 6'-8' below surface.

Pump approx 220 sx shoe plug @ 560'
 Will bring cement to surface.

Pump 50 sx courtesy plug at 2,500'

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 4,400'

Pump 30 sx balanced plug to cover remedial perms @ 6,280'

CIBP @ 6,646' w/ 2 sx cement on top

Niobrara Perforations 6,696' - 6,912'

Codell Perforations 6,994' - 7,026'

TD: 7,109.00

