

NOBLE ENERGY INC.
 STATE A36-06
 SENW 36-6N-64W
 2032 FNL & 1933 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/10/2015

API: 05-123-14744
 COGCC #

GL Elev: 4614
 KB Elev: 4624


Spud Date:

Surface Casing :
 8-5/8" 24# @ 322'
 Cement: TOC @ Surface
 TOC: Surface

TOC @ 5770'

Nio Top 6478

Production Casing :
 2-7/8" 6.5# N-80 @ 6937'
 Cement: TOC @ 5770'
 TD: 10/7/1990

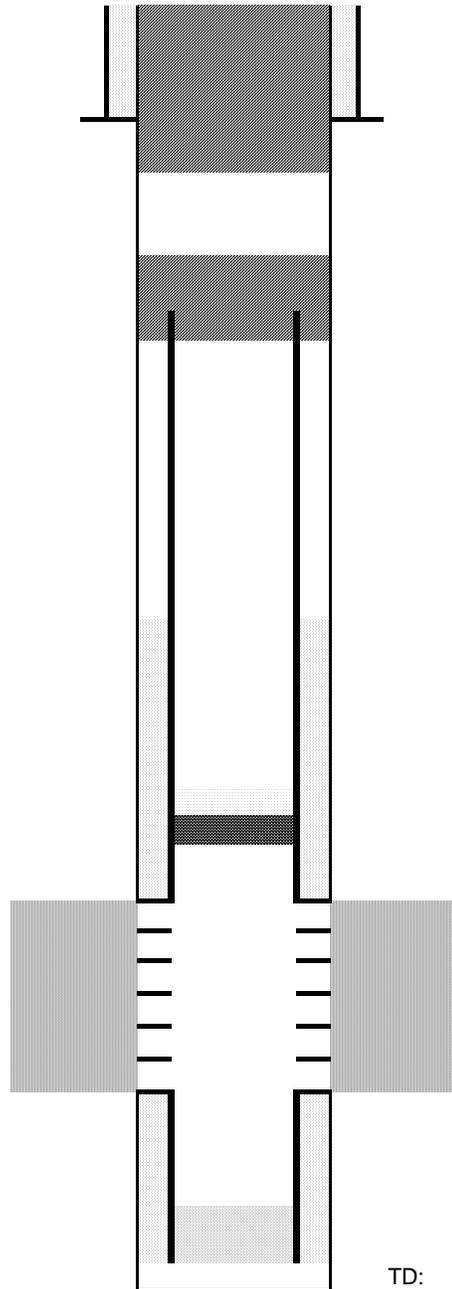

Cut surface casing off 6'-8' below surface.

Pump approx 240 sx shoe plug @ 490'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6733' w/ 2 sx cement on top

Codell Perforations (6783-6796)

TD: 6940