

NOBLE ENERGY INC.
 STATE A36-03
 NENE 36-6N-64W
 683' FNL & 2028' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/11/2015

API: 05-123-14743
 COGCC #

GL Elev: 4624'
 KB Elev: 4634'


Spud Date: 9/26/1990

Surface Casing :
 8 5/8" 24# @ 277'
 Cement: 250 sx
 TOC: Surface

DEPTHS ARE ESTIMATED; RUN CBL TO CONFIRM
 Casing Repair Cement from 4293' to 5880'
 Casing Patch @ 5762' (7/21/2000)

TOC @ 5880'

Production Casing :
 2 7/8" 6.5# @ 6955'
 Cement: 275 sx
 TD: 9/30/1990

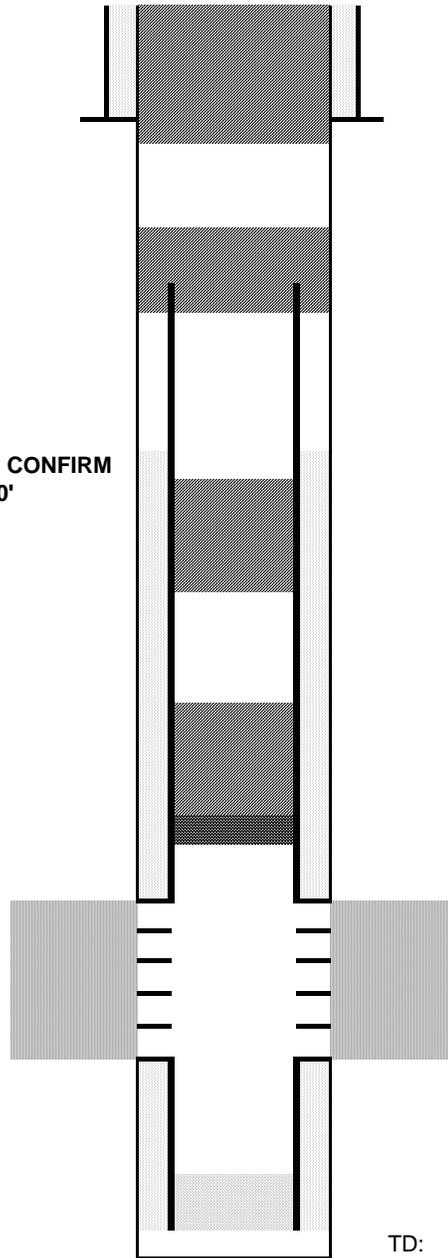

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 500'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 25 sx Balance Plug @ 5900'

Pump 10 sx Balance Plug from 6398' to 6743'.

CIBP @ 6743' w/ 2 sx cement on top

Codell Perforations 6793' - 6804'

TD: 6955'