

NOBLE ENERGY INC.
 Johnston UPRR 12-19
 SWNW 19-4N-66W
 1995 FNL & 697 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/17/2015

API: 05-123-16005
 COGCC #


GL Elev: 4720'
 KB Elev: 4730'

Spud Date: 8/22/1992

Surface Casing :
 8 5/8" 24# @219'
 Cement: 169
 TOC: Surface

TOC @
 Nio Top 6894'

Production Casing :
 4 1/2" 11.60# @7340'
 Cement: 140
 TD: 1/0/1900

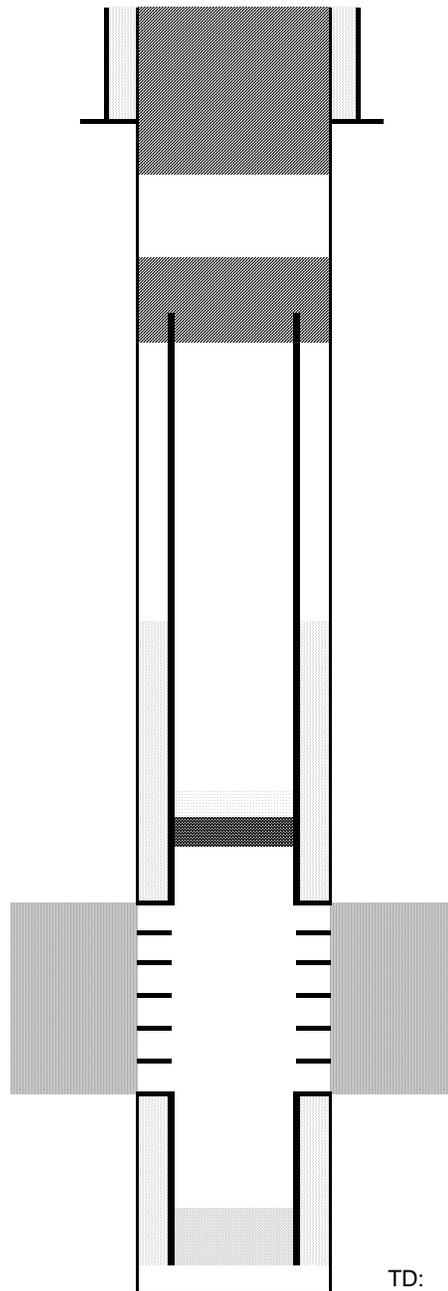

Cut surface casing off 6'-8' below surface.

Pump approx 22 sx shoe plug @ 225'
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6861' w/ 2 sx cement on top

Niobrara Perforations 6911' - 6920'
 Niobrara Perforations 7009' - 7015'
 Codell Perforations 7227' - 7239'
 Codell Perforations 7228' - 7238'

TD: 7340'