

NOBLE ENERGY INC.
 SCHOLFIELD A36-19
 NWNW 36-6N-64W
 1320 FNL & 1170 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/18/2015

API: 05-123-25768
 COGCC #

GL Elev: 4627'
 KB Elev: 4640'


Spud Date:

Surface Casing :
 8-5/8" 24# J-55 @ 440'
 Cement: 213
 TOC: Surface

TOC @ 1754'

Nio Top 6499'

Production Casing :
 4-1/2" 11.6# M-80 @ 6950.8'
 Cement: 680
 TD: 6/22/2008

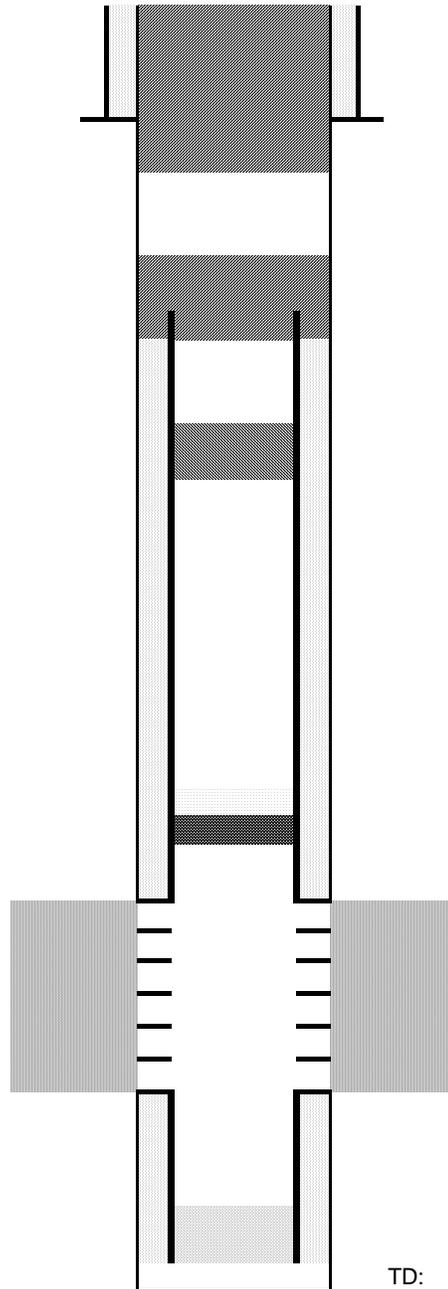

Cut surface casing off 6'-8' below surface.

Pump approx 160 sx shoe plug @ 470'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 1700'

Pump 20 sx courtesy plug @ 2500'

CIBP @ 6472' w/ 2 sx cement on top

Niobrara Perforations (6522-6538', 6632-6648')

Codell Perforations (6809-6821')

TD: 6966'