

Company: Noble Energy Inc

Well: Oscar Y10-74HN
Field: Wattenberg
County: Weld

State: Colorado

USI-LITE (2500 psi)

County: Weld
Field: Wattenberg
Location: NWSE Sec. 10 T 2N R 64W
Well: Oscar Y10-74HN
Company: Noble Energy Inc

LOCATION			
Permanent Datum: Log Measured From: Drilling Measured From:		GL KB KB	Elev: K.B. 4971.0 F G.L. 4947.0 F D.F. 4970.0 F
API Serial No. 05-123-38205-0000	Section 10	Township 2N	Range 64W
Logging Date	16-Dec-2014		
Run Number	1		
Depth Driller	7159.9 F		
Schlumberger Depth	7159.9 F		
Bottom Log Interval	6925.0 F		
Top Log Interval	52.0 F		
Casing Fluid Level	8.0 F		
Salinity			
Density	8.40 LB/G		
Fluid Level	8.0 F		
BIT/CASING/TUBING STRING			
Bit Size	8.750 IN		
From	1189.0 F		
To	7159.9 F		
Casing Size	7.00 IN		
Weight	26.00 LB/F		
Grade	P110		
From	0.0 F		
To	6925.0 F		
Max Recorded Temp	228.8		
Logger on bottom (date)	16-Dec-2014		
Location	Fort Morgan CO		
Recorded By	MK Henrikson/D Maniere		
Witnessed By	Bill Mansfield		

DEPTH SUMMARY LISTING

DEPTH SYSTEM EQUIPMENT

Depth Measuring Device	Tension Device	Logging Cable
Type: Serial Number: Calibration Date: Calibration Cable Type: Wheel Correction 1: Wheel Correction 2:	Type: Serial Number: 1109 Calibration Date: Calibrator Serial Number: Number Of Calibration Points: Calibration RMS: Calibration Peak Error:	Serial Number: F713384 Length: 17000.00000

DISCLAIMER

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIIONS ON USE OF THE RECORDED-DATA (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF ANR RELIANCE UPN THE RECORDED-DATA; AND (c)CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISIONS MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA

0 PSI repeat pass 2500 PSI main pass

Bottom log interval of 6925 ft


Could not spin sub at bottom started log 145 ft above liner (7085.2 ft).


Bottom log temperature of 228.8 deg F measured at depth.


Top of Cement @ 1000 ft.


Main Pass


Company: Noble Energy Inc
Well: Oscar Y10-74HN
Field: Wattenberg

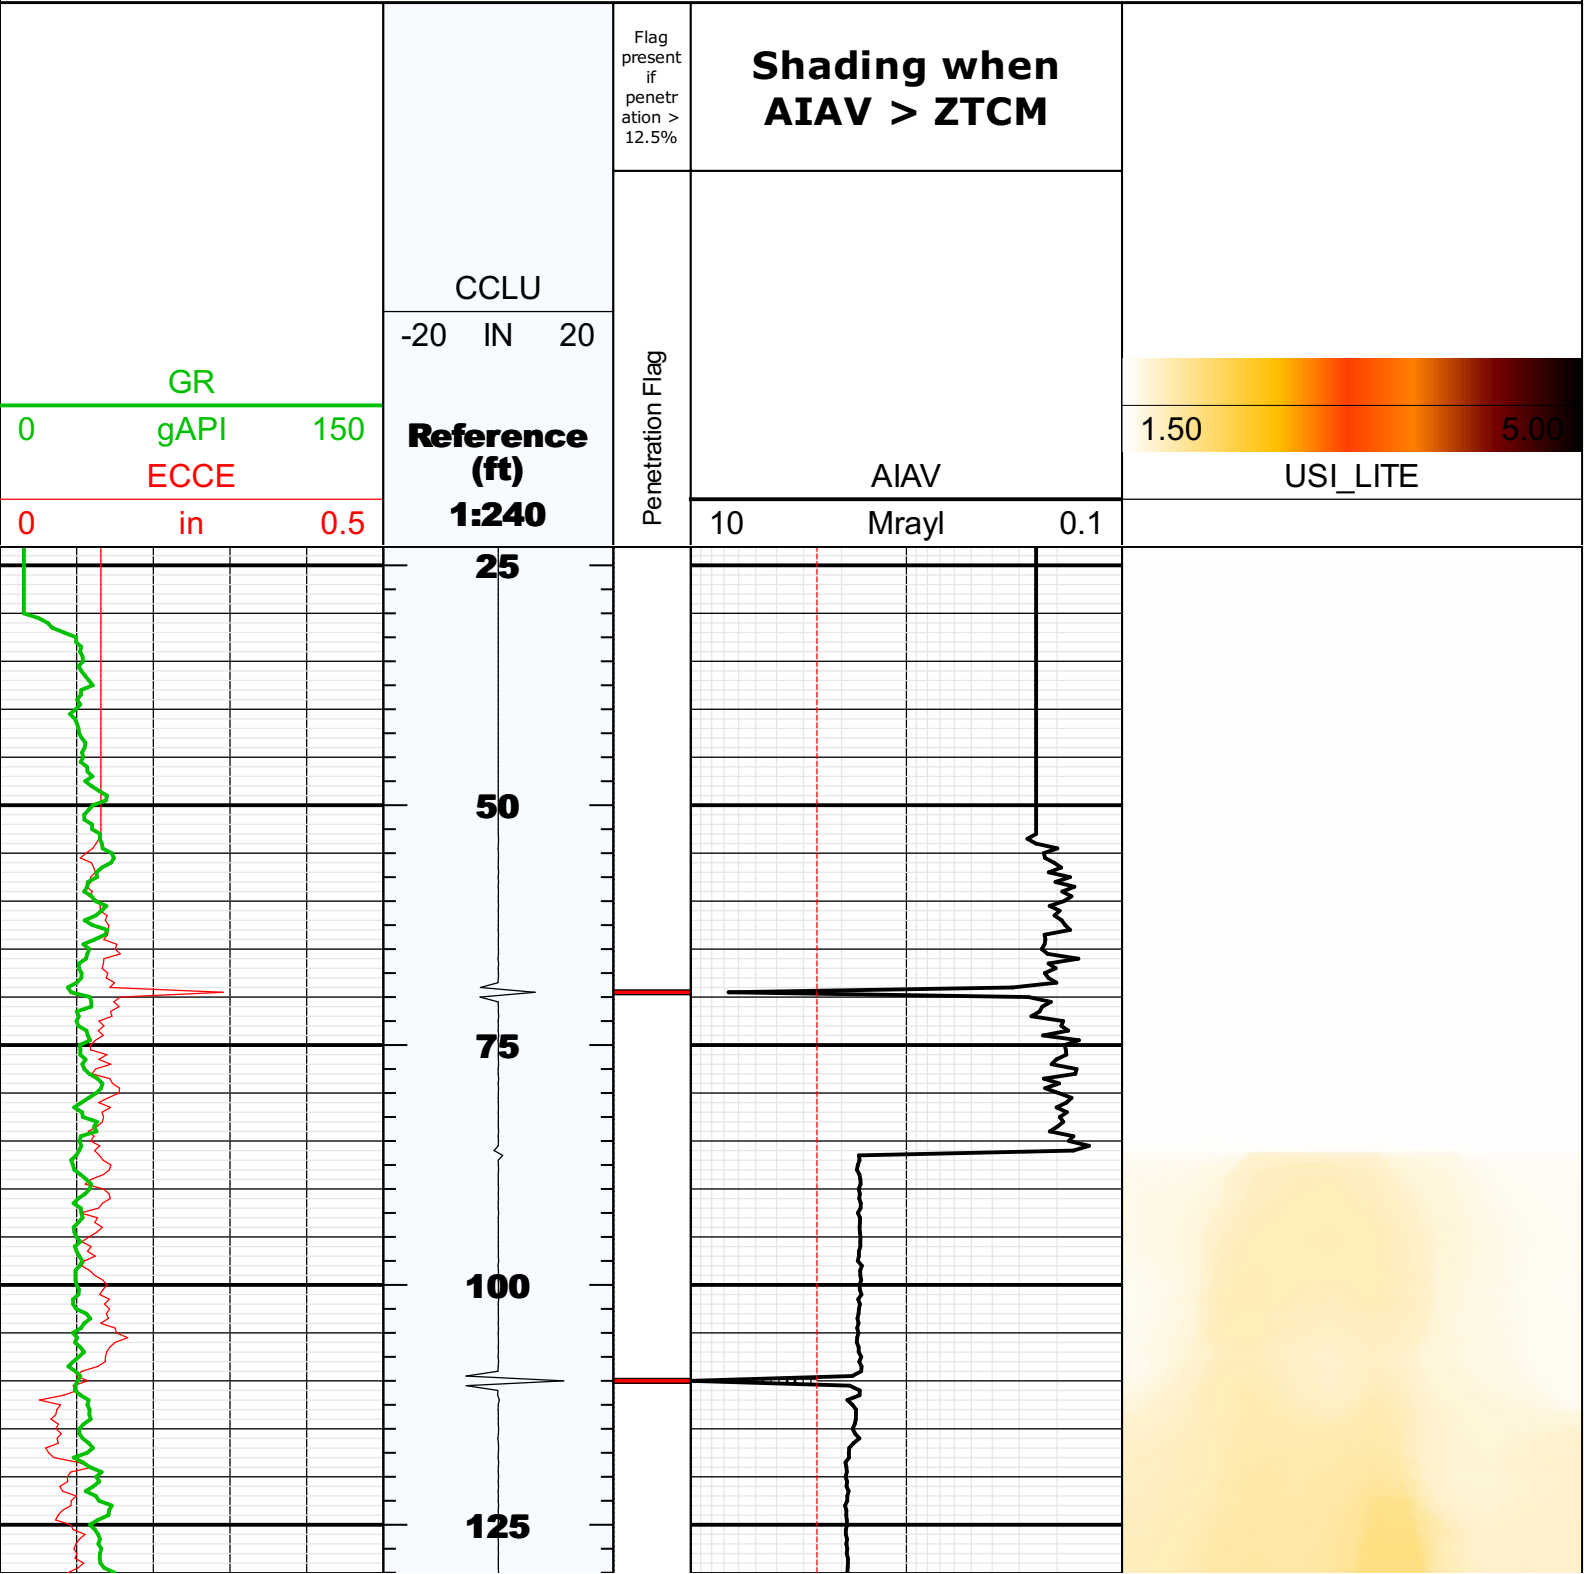


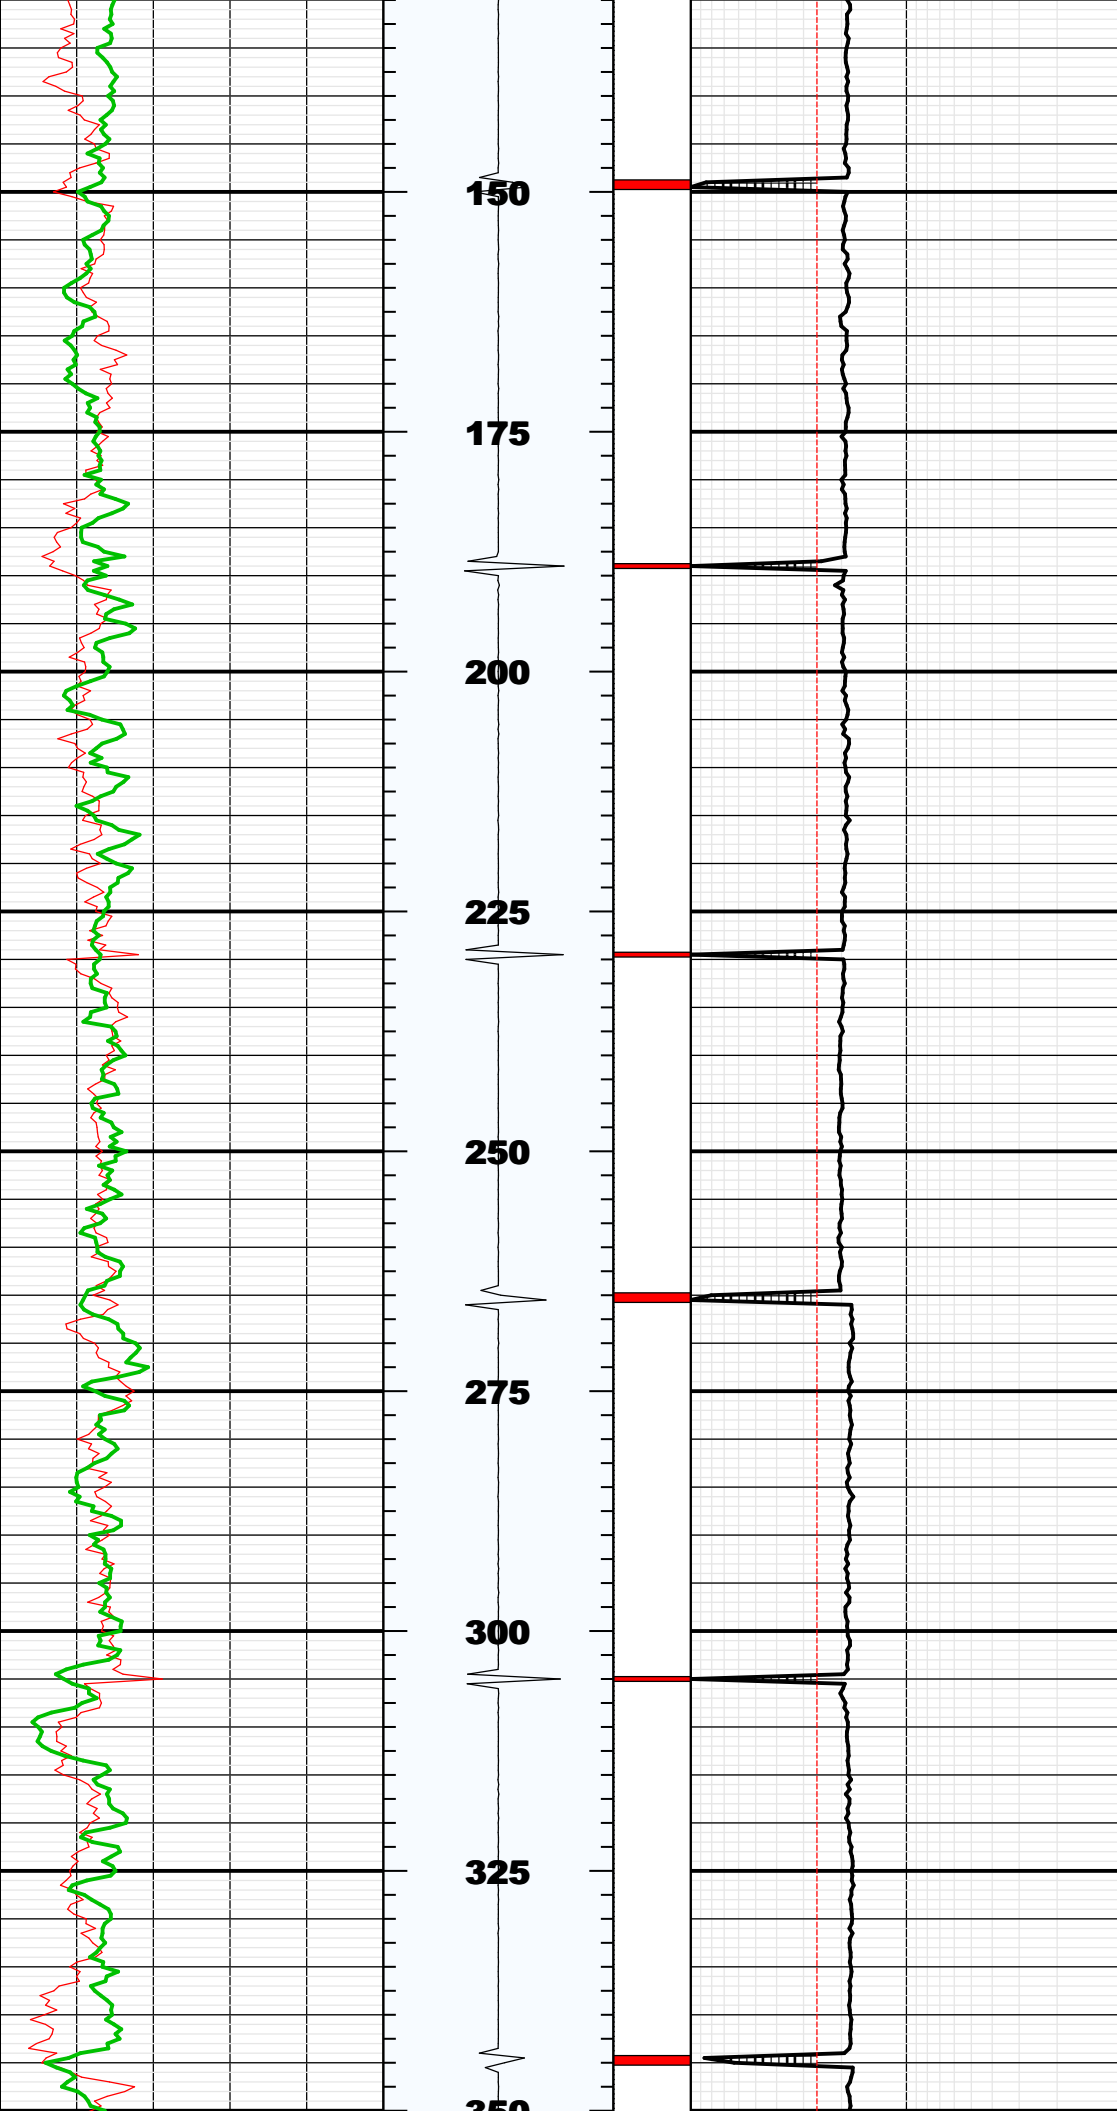


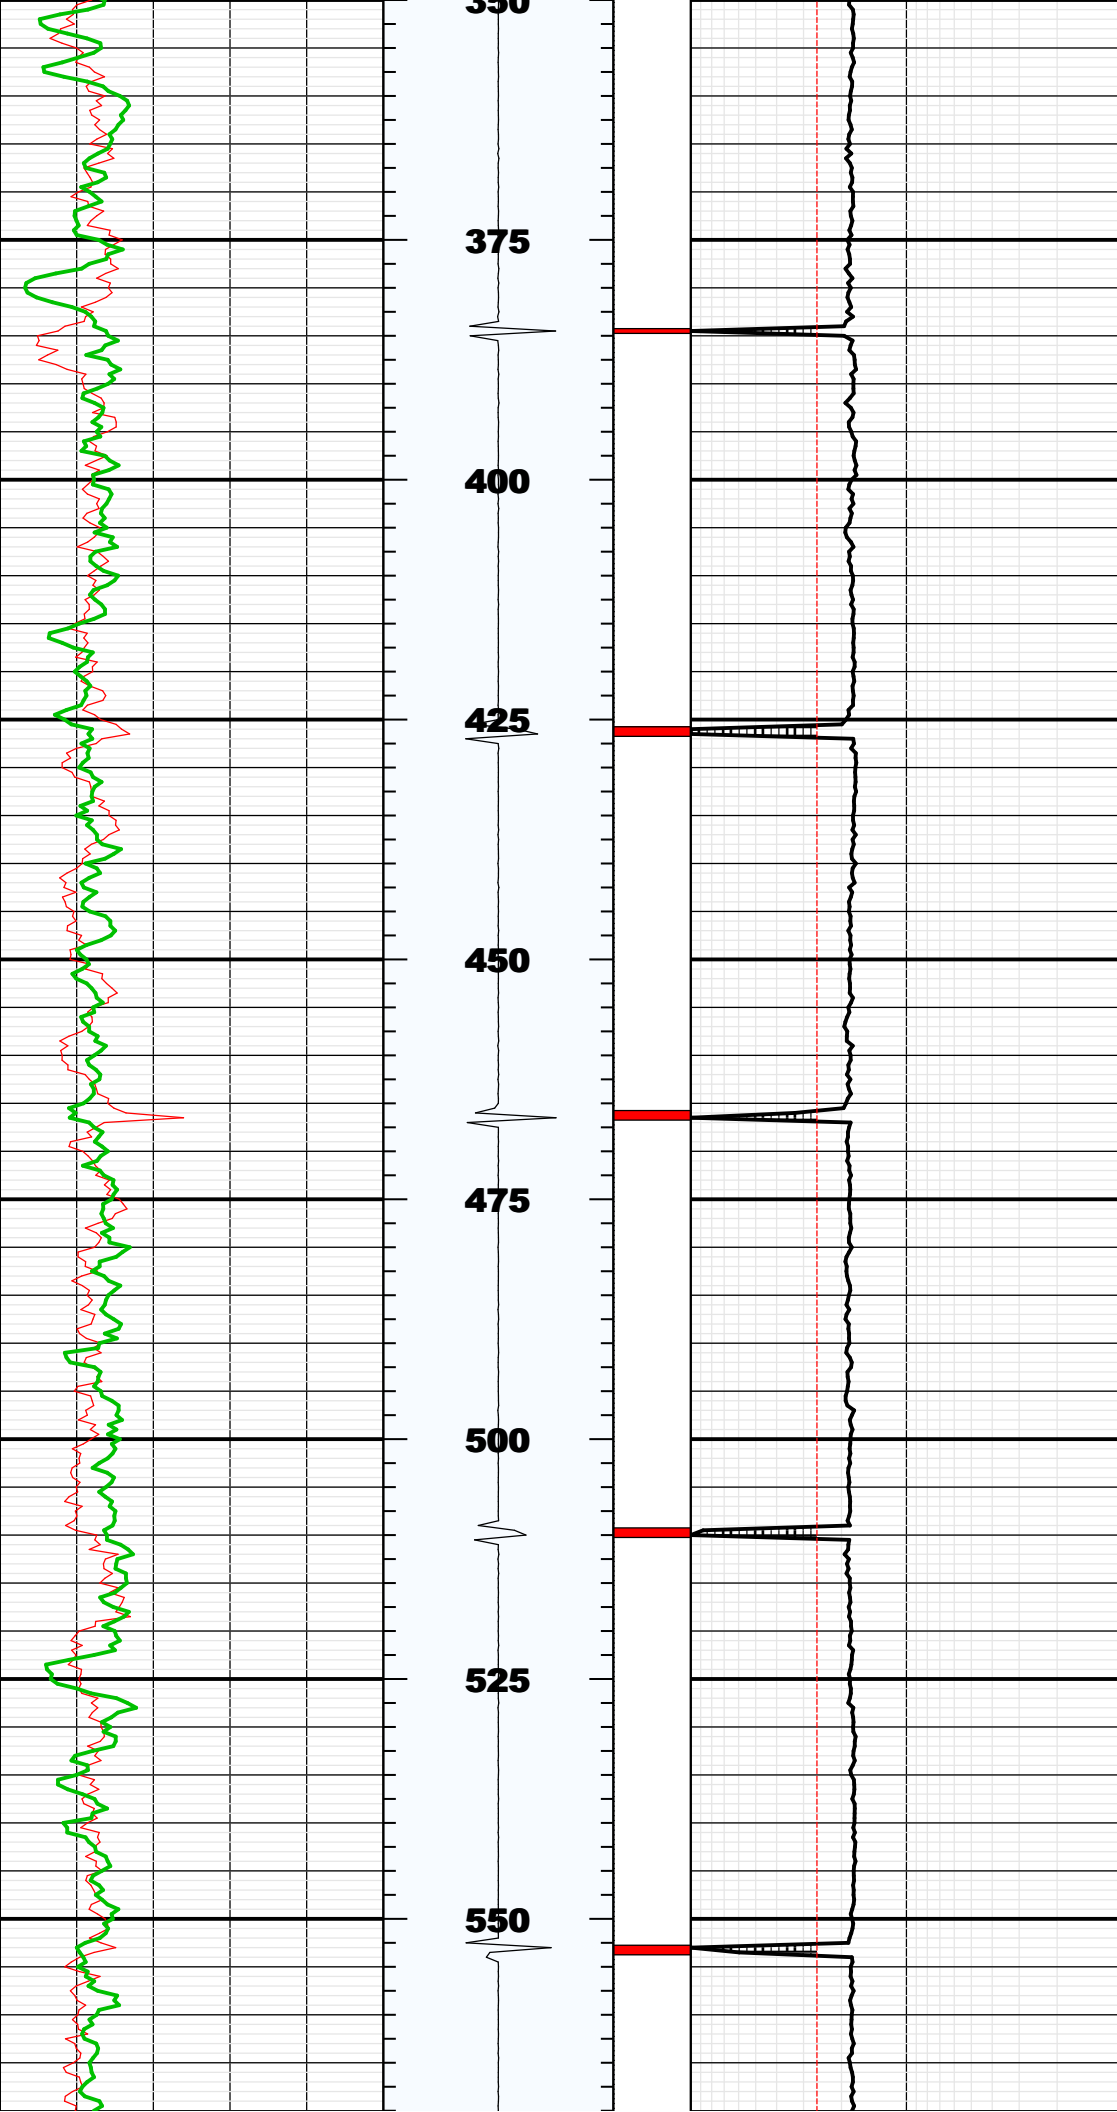


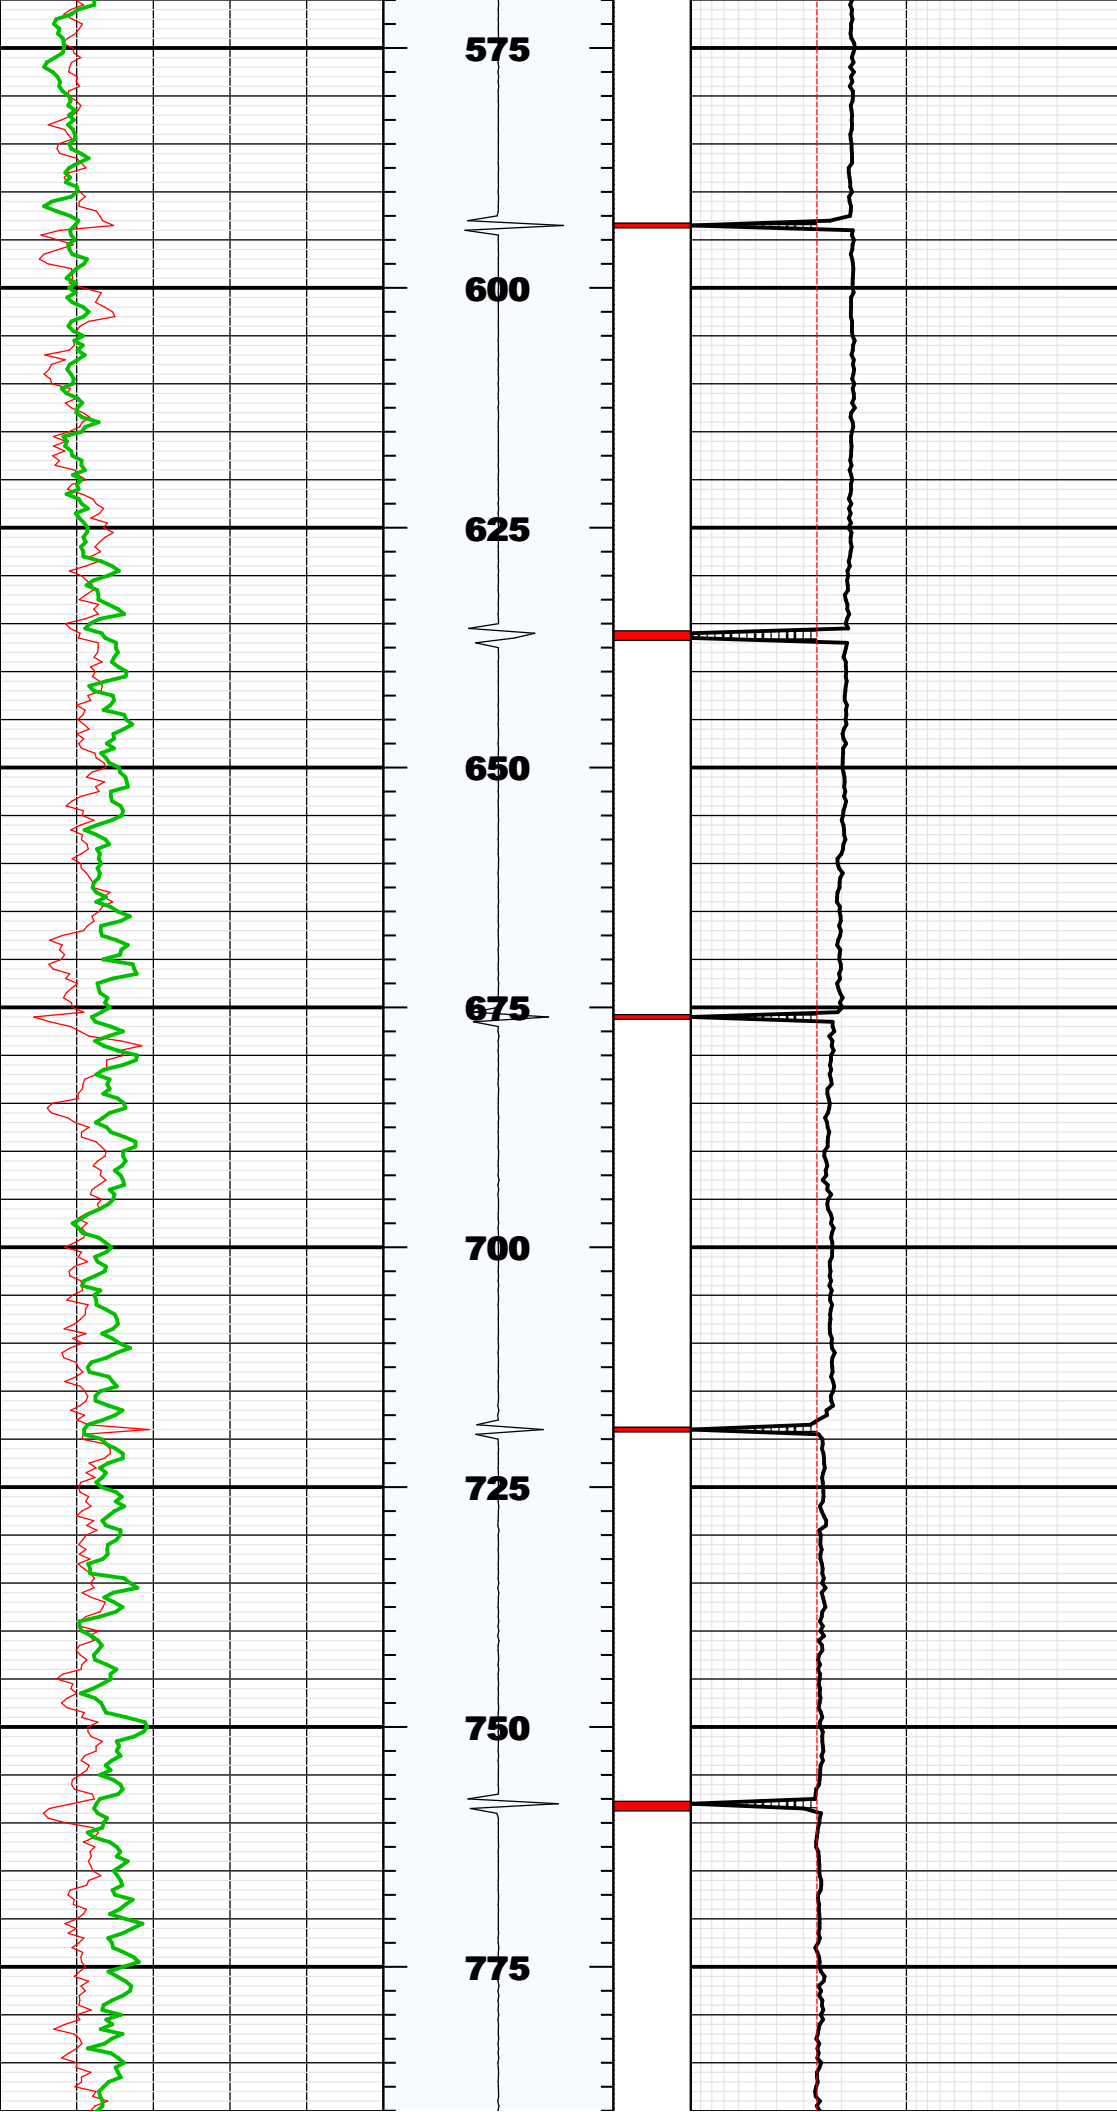


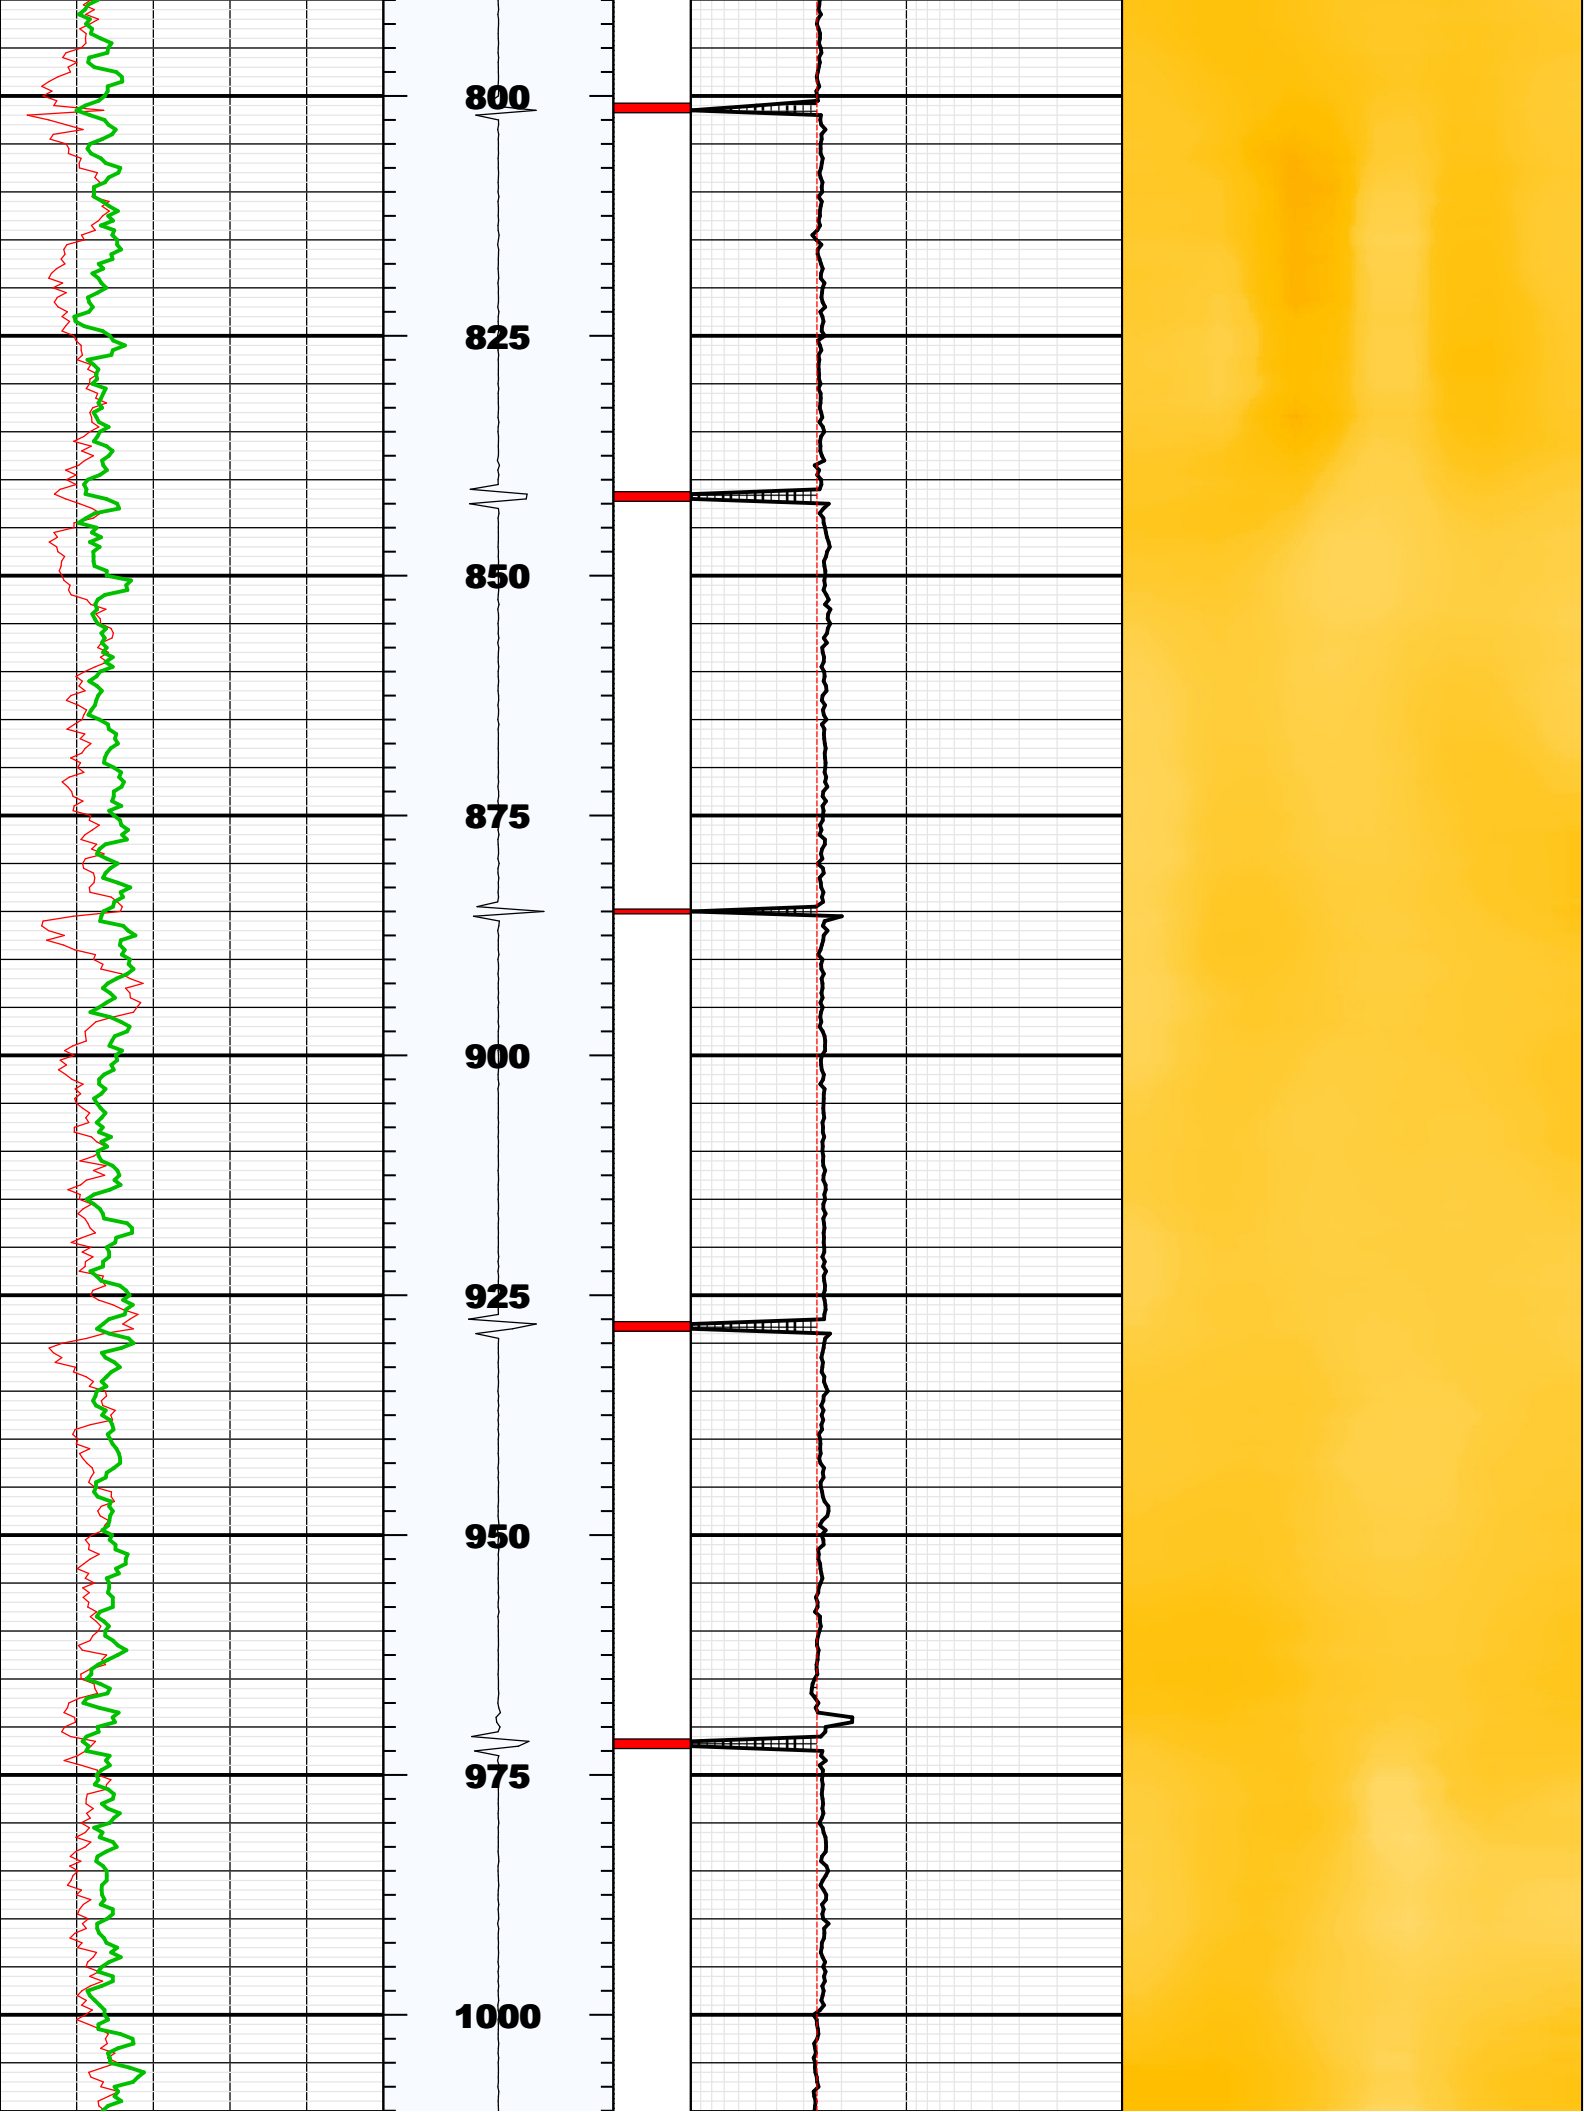


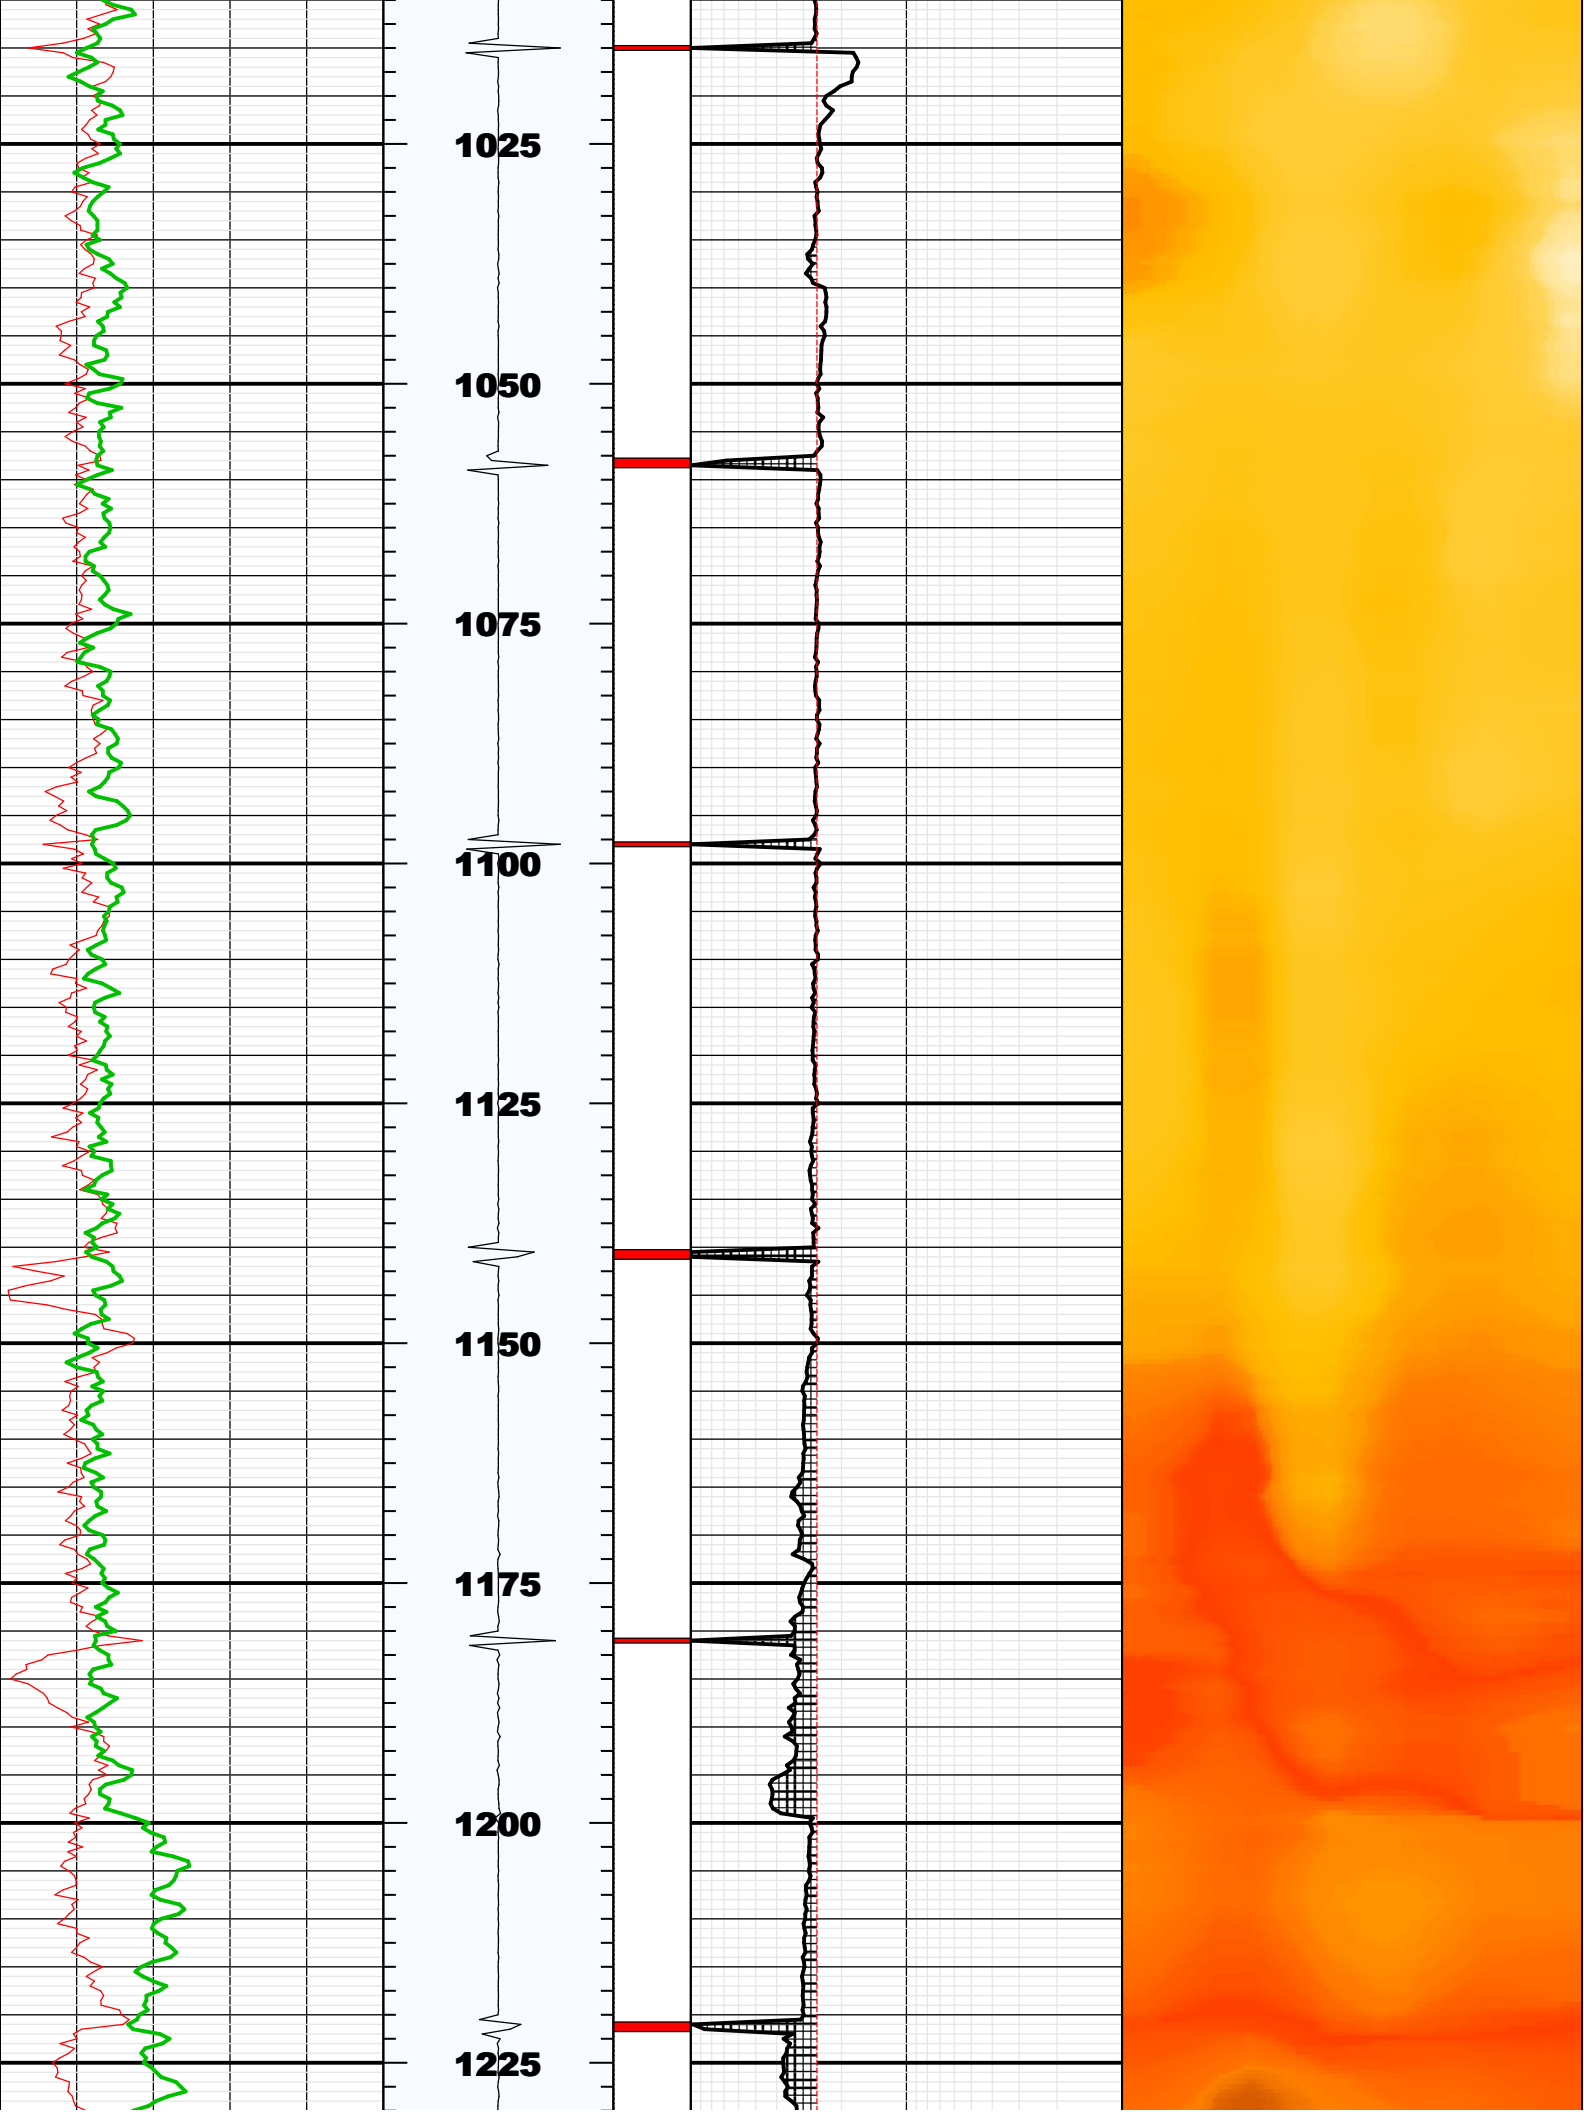


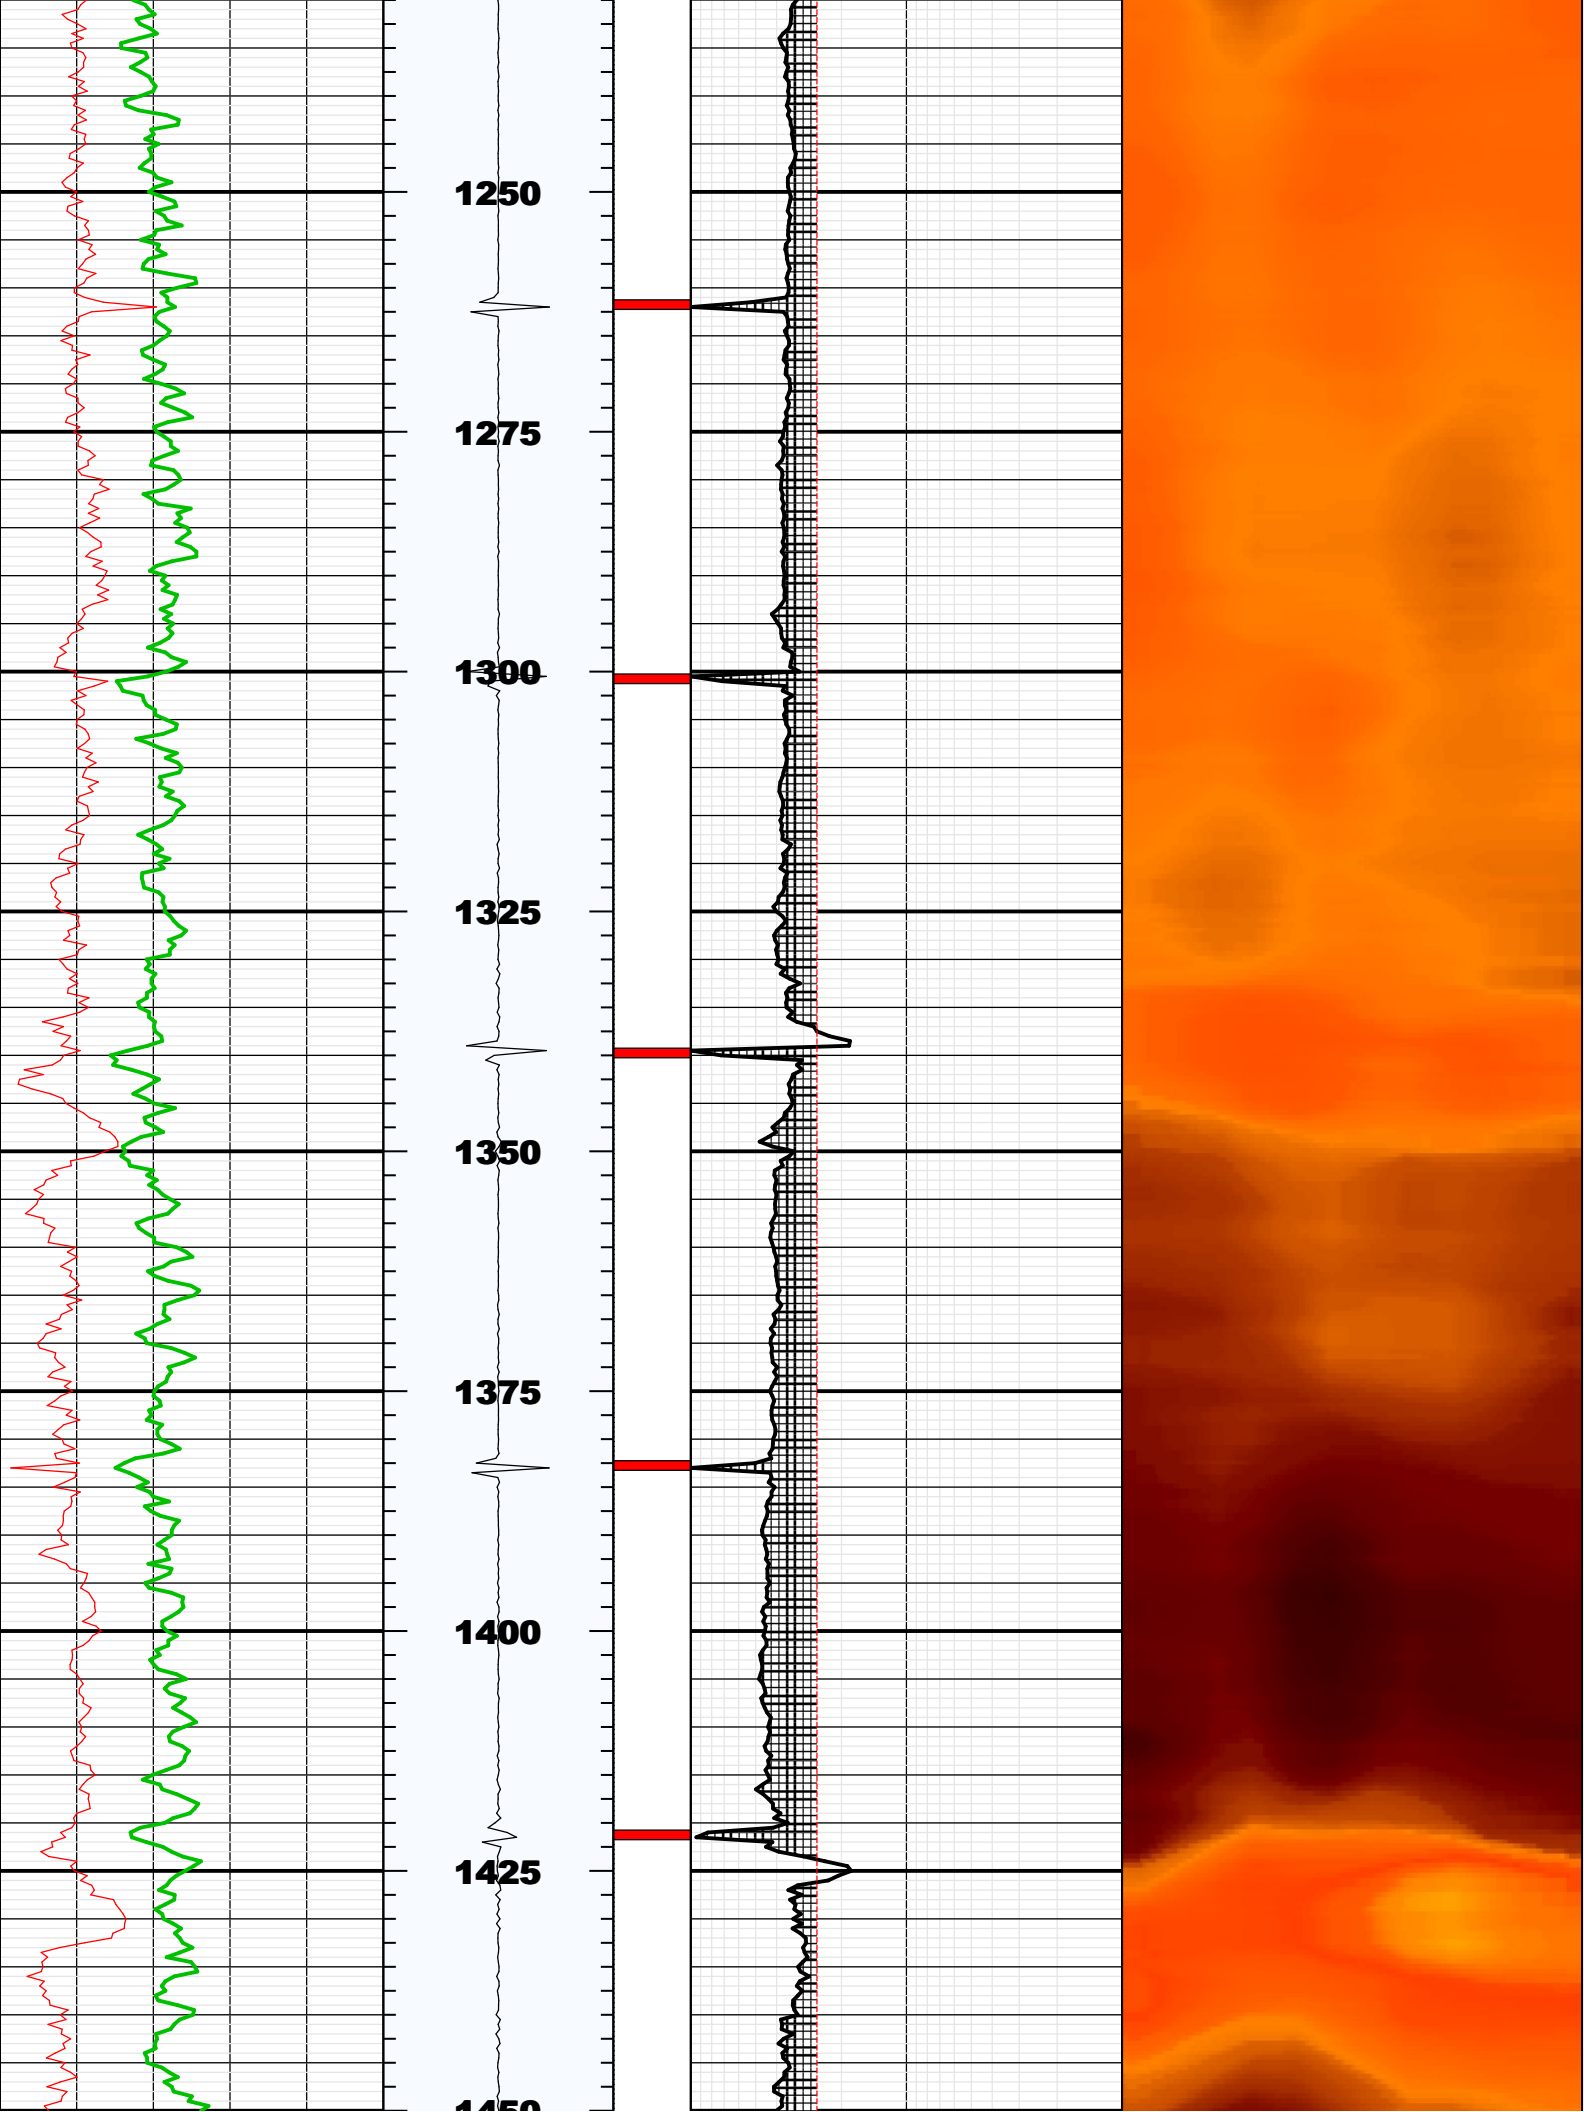


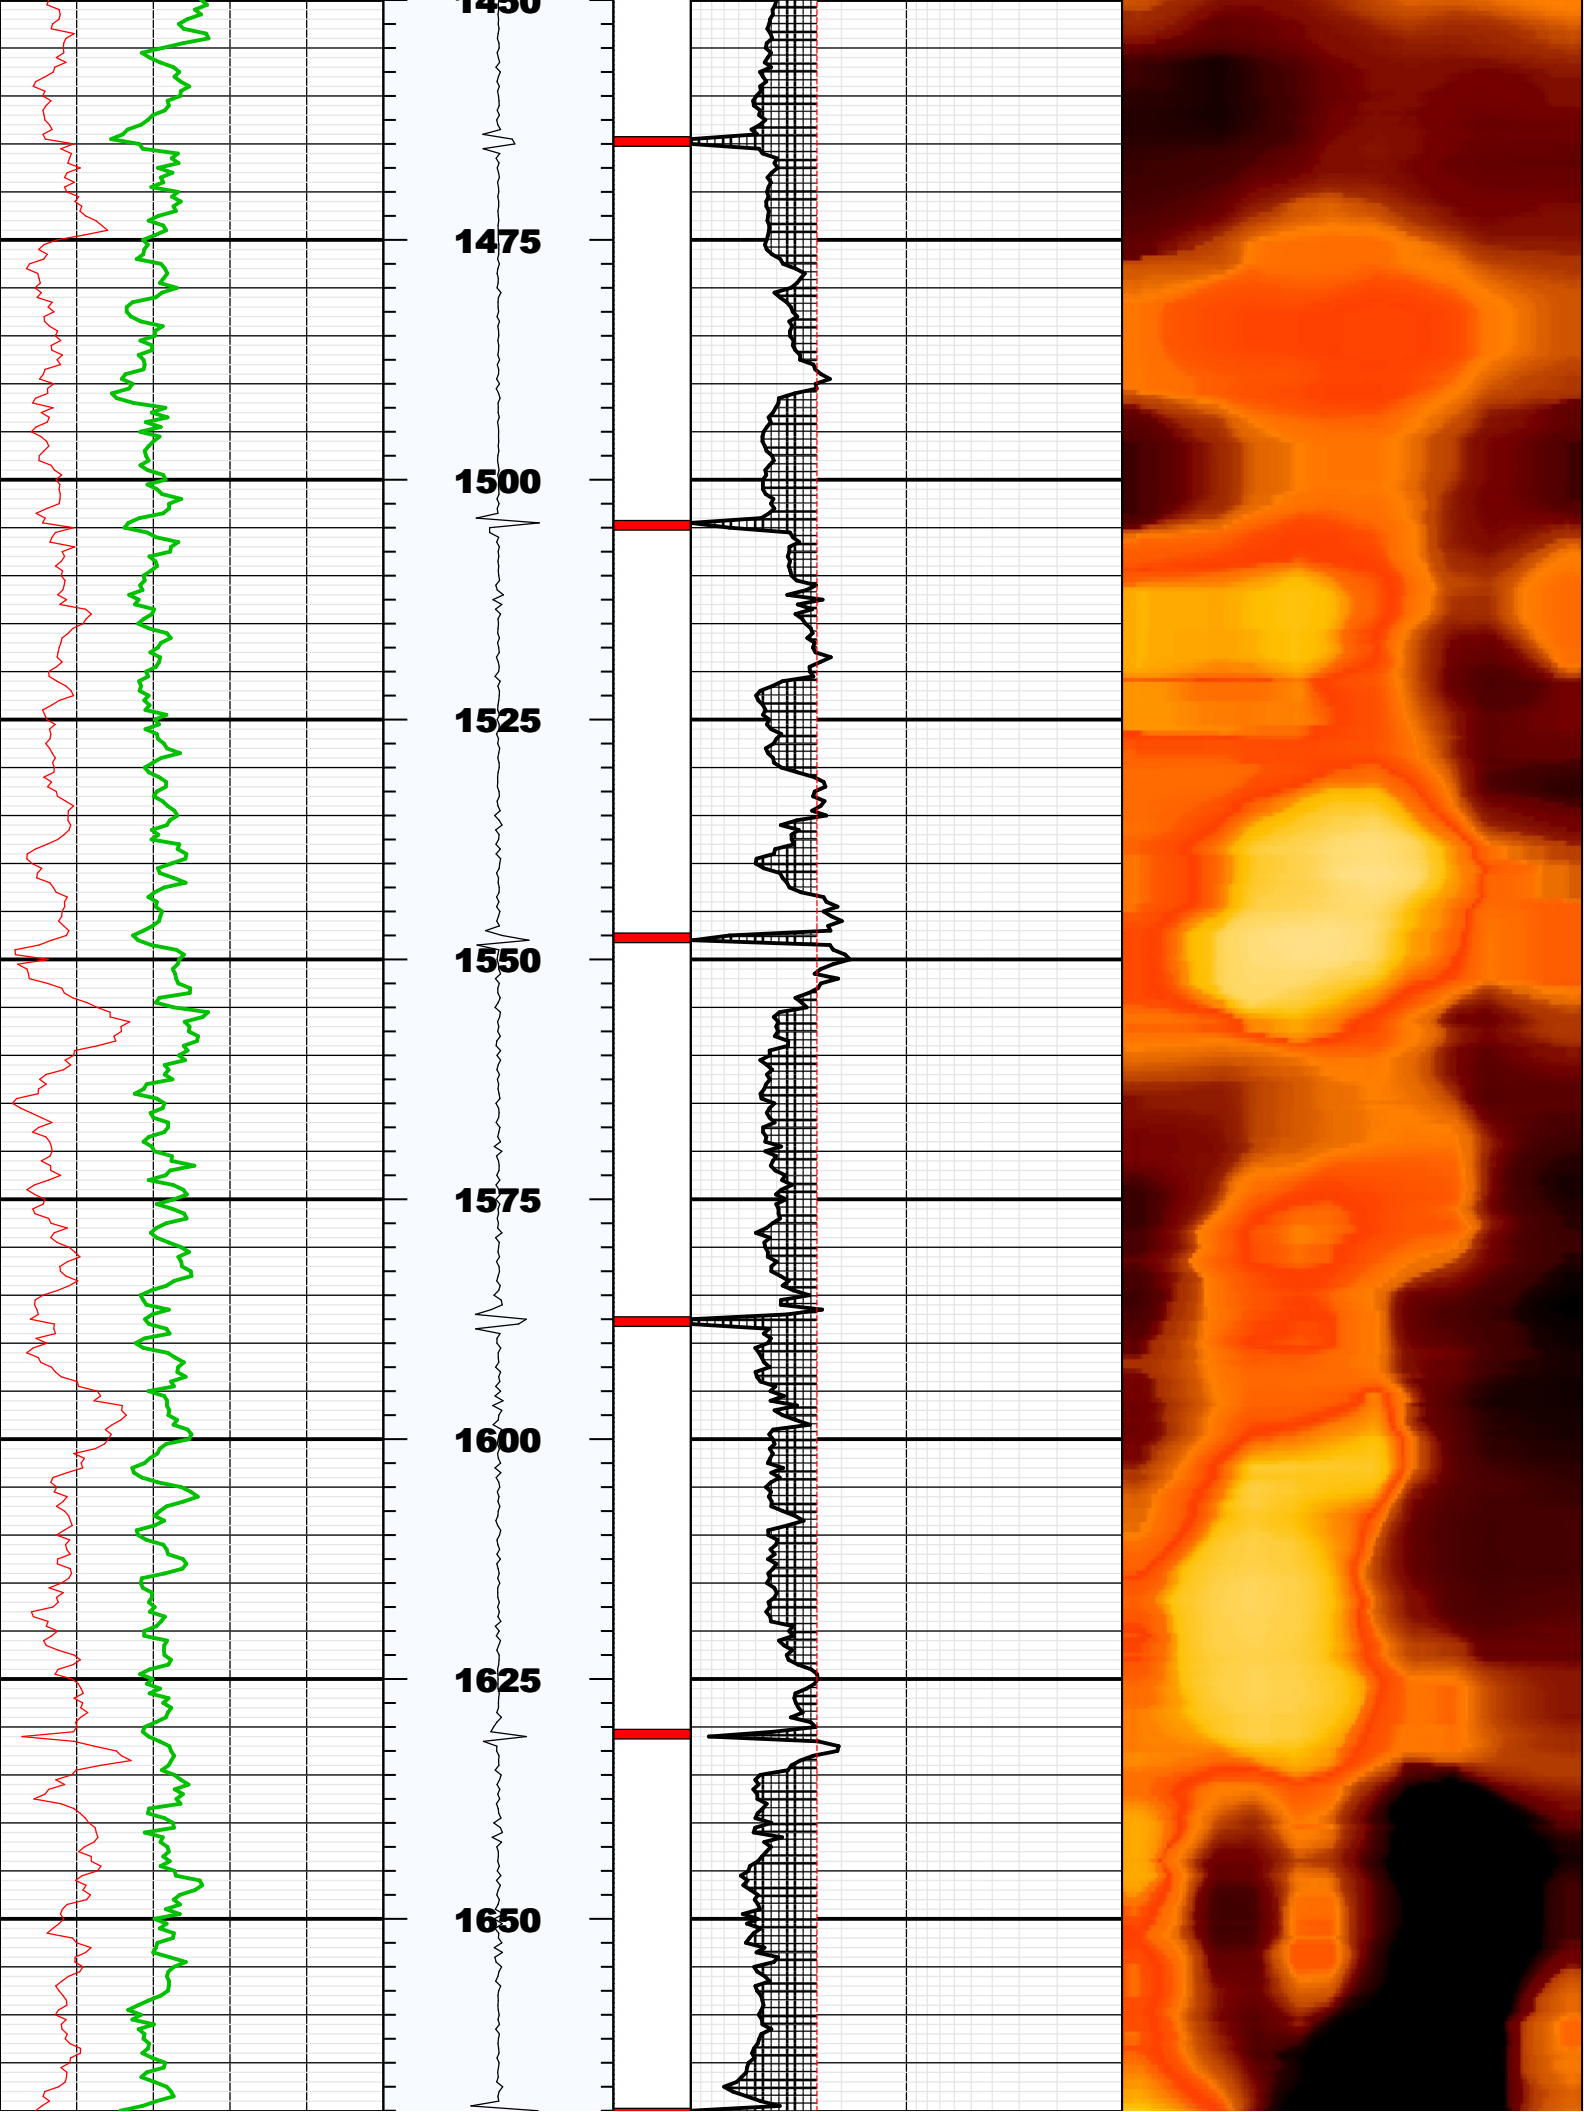



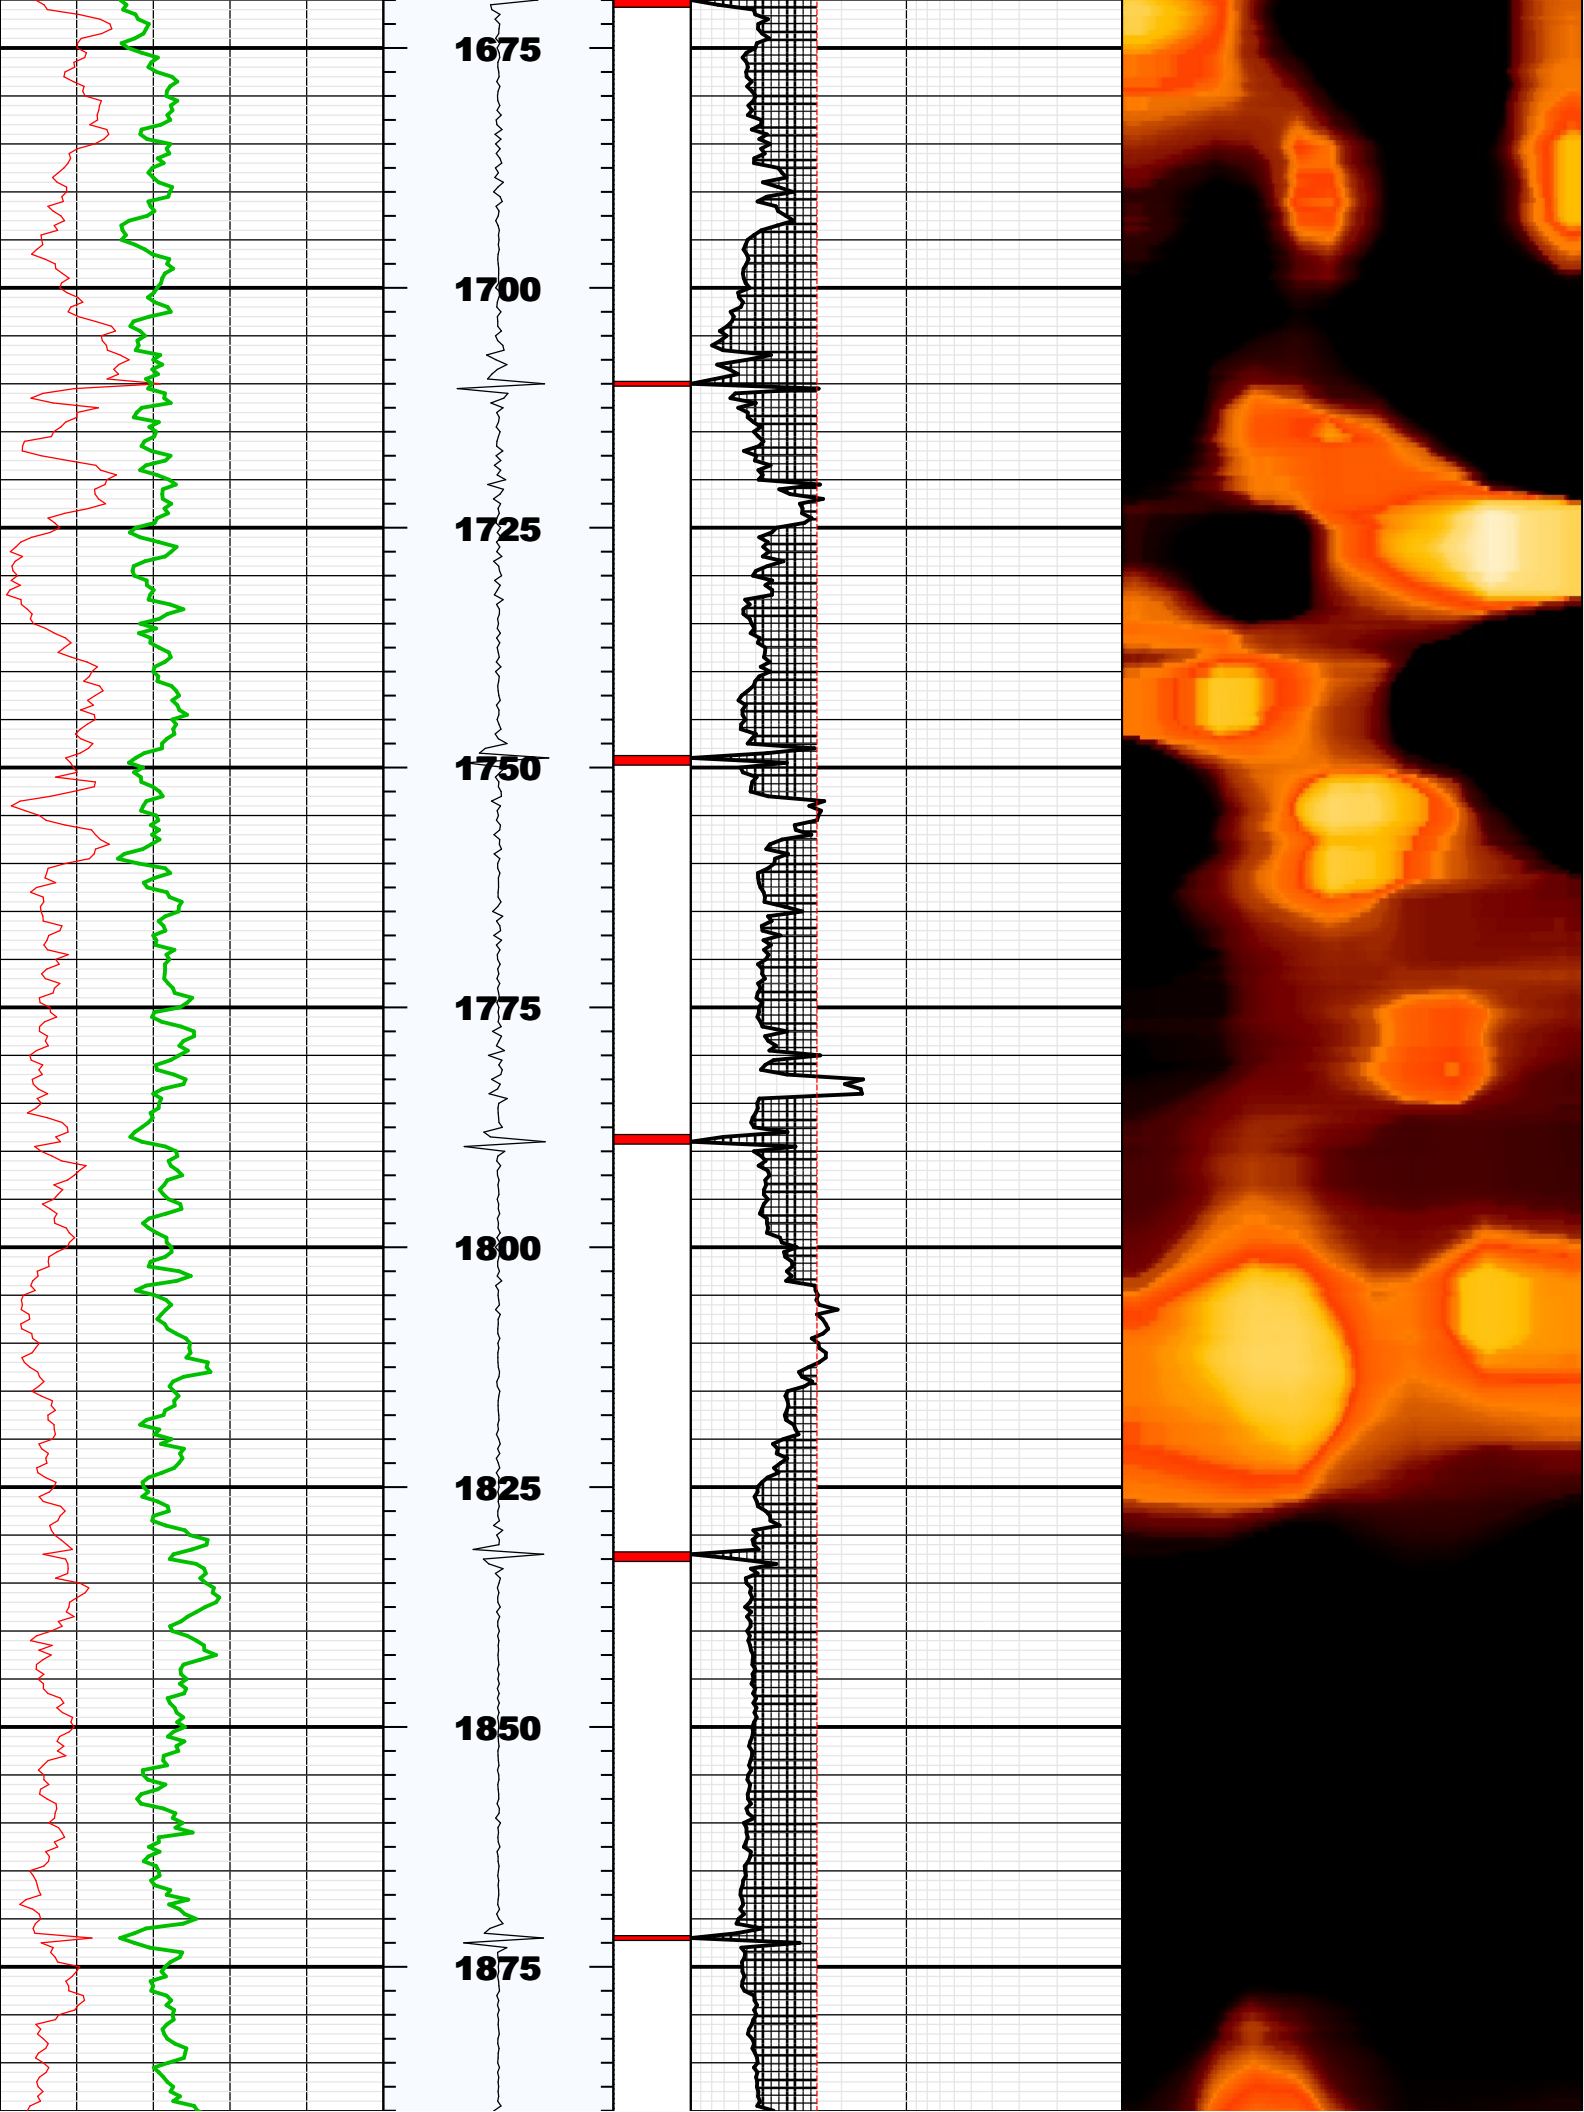


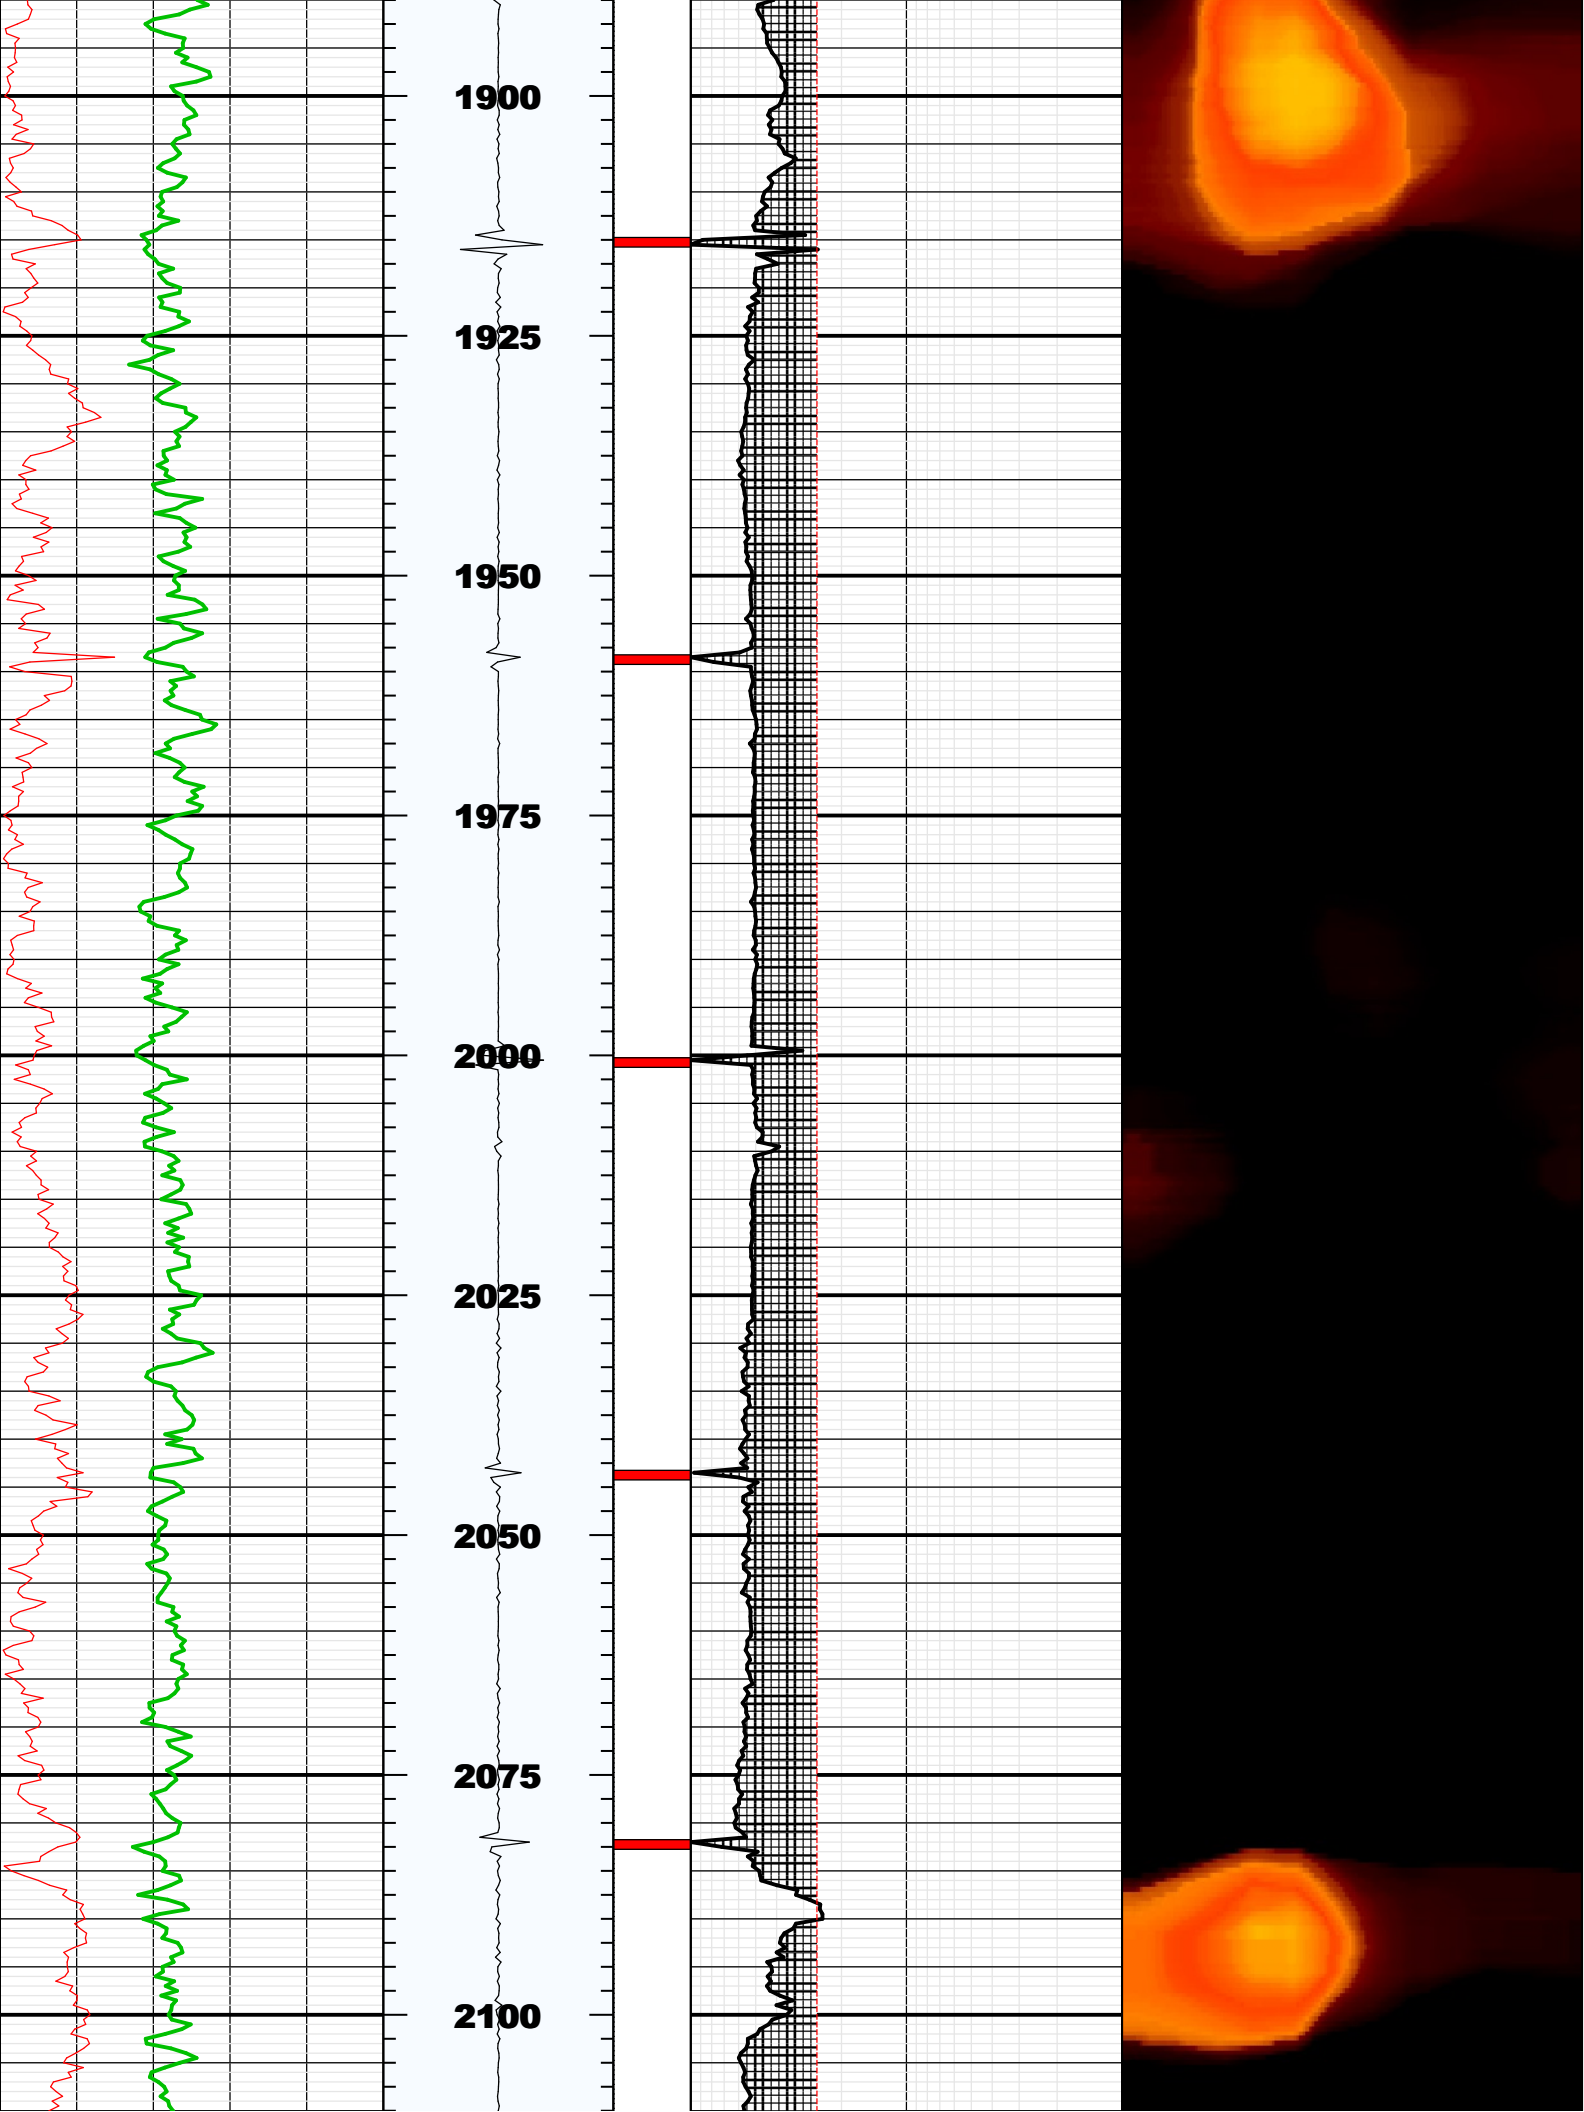


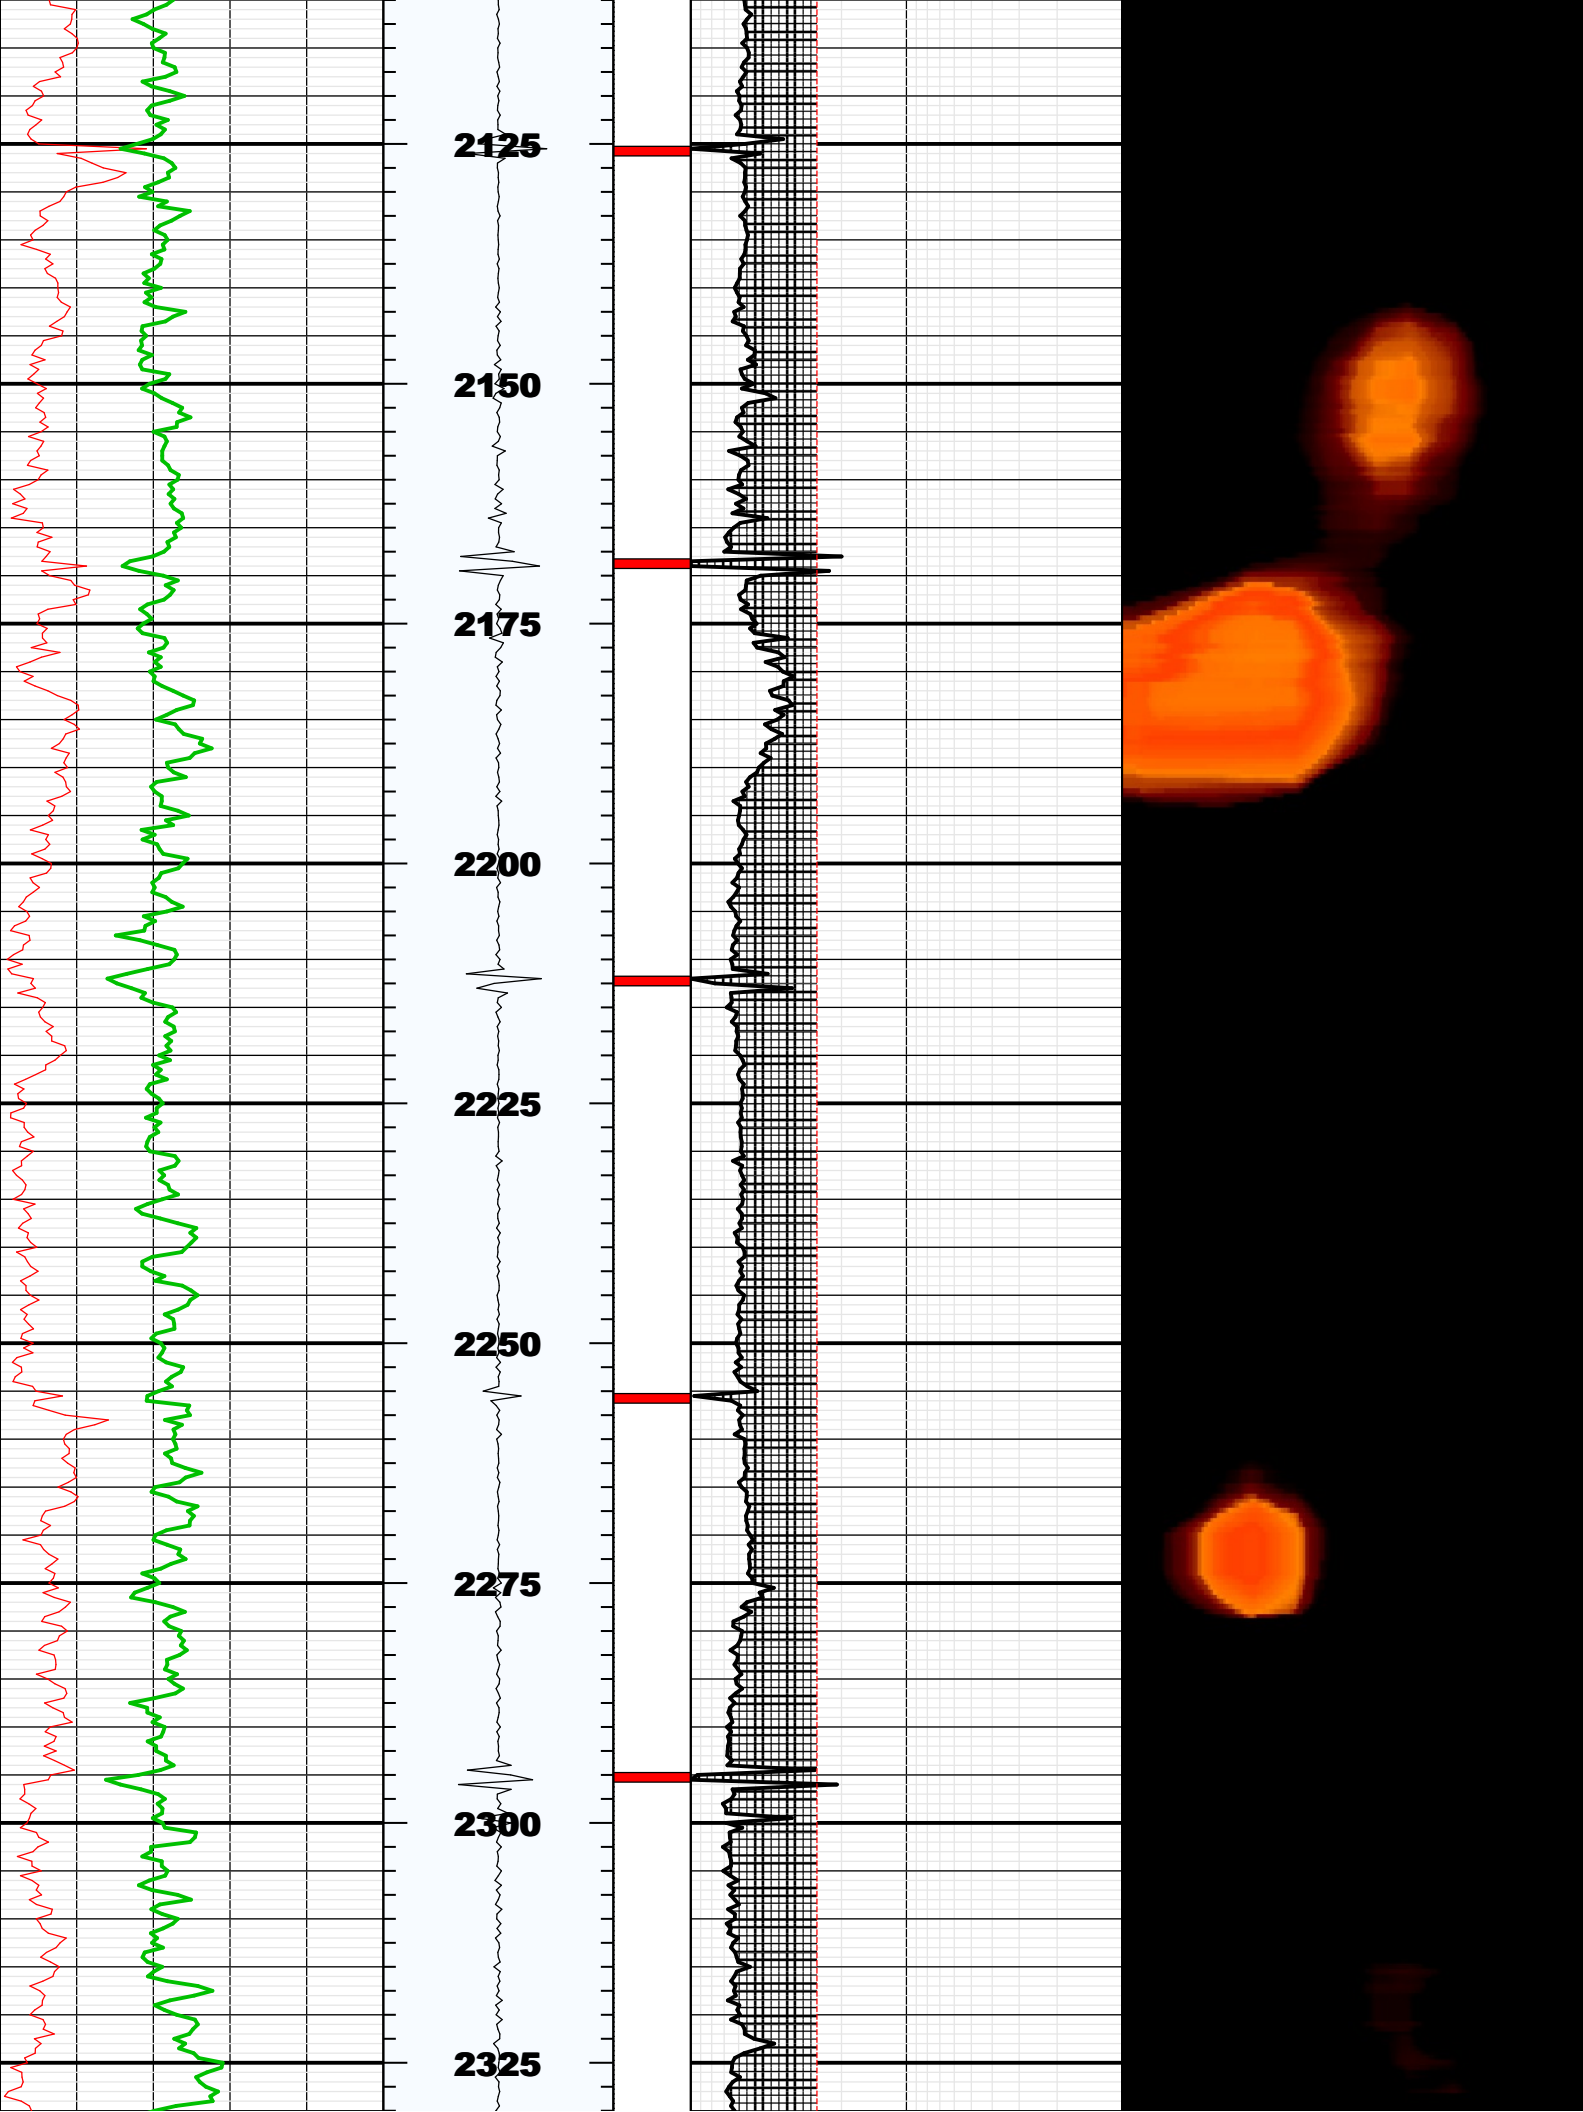


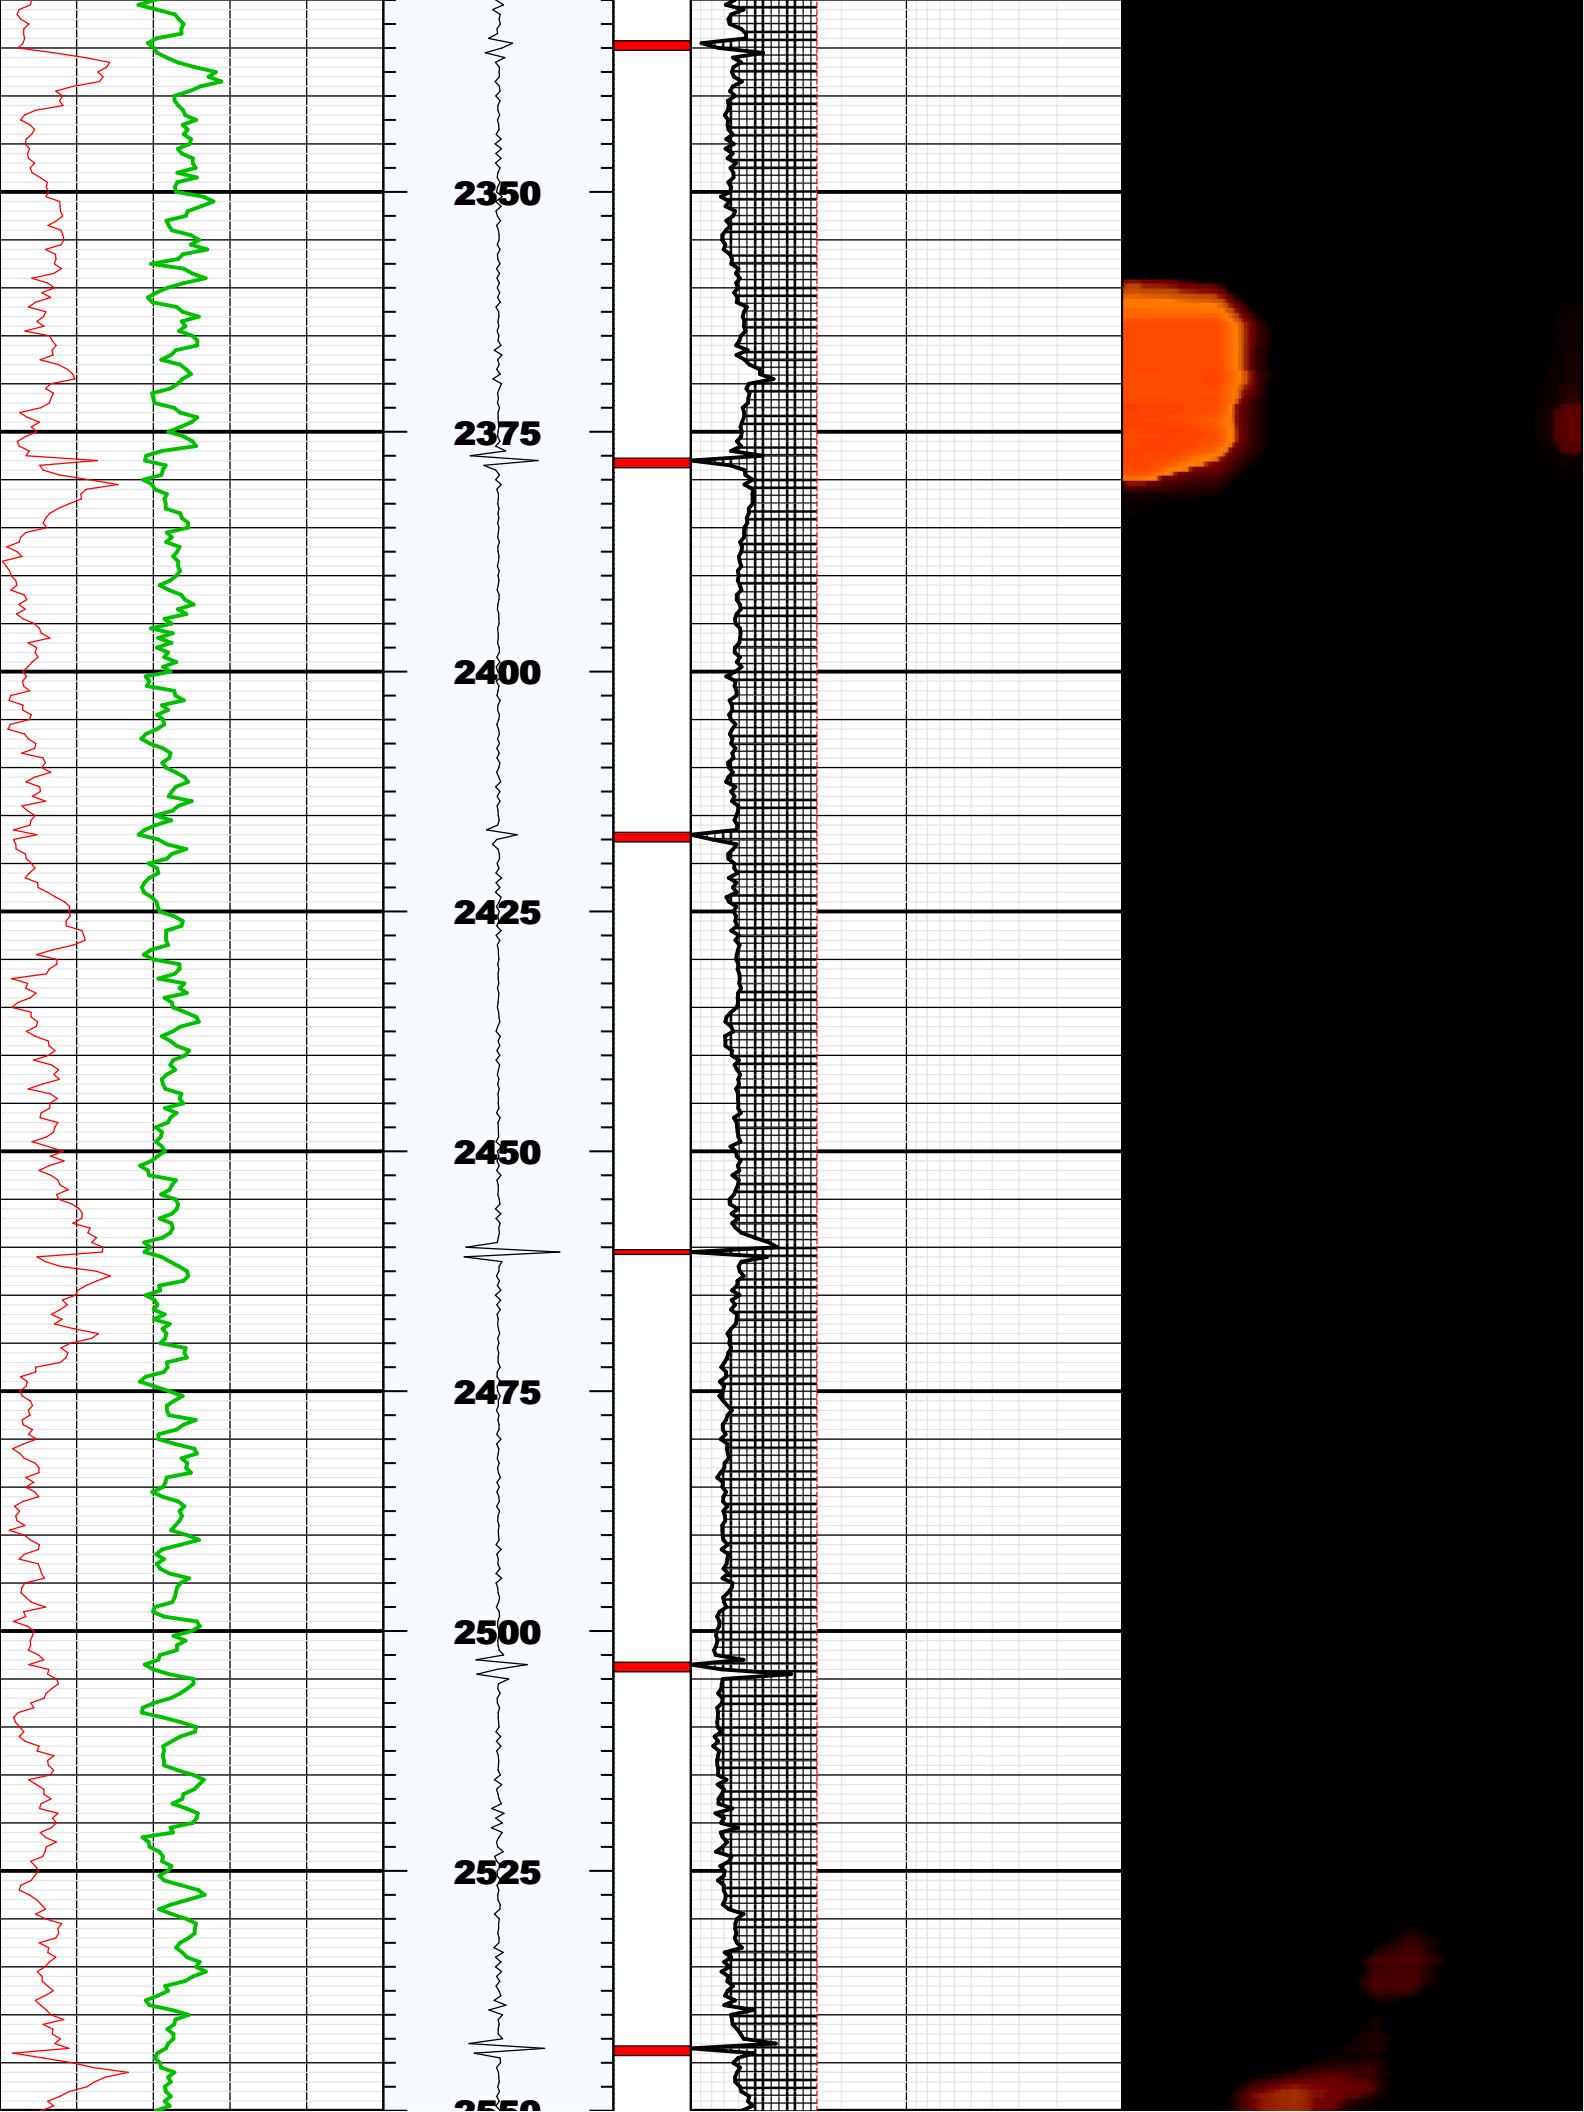


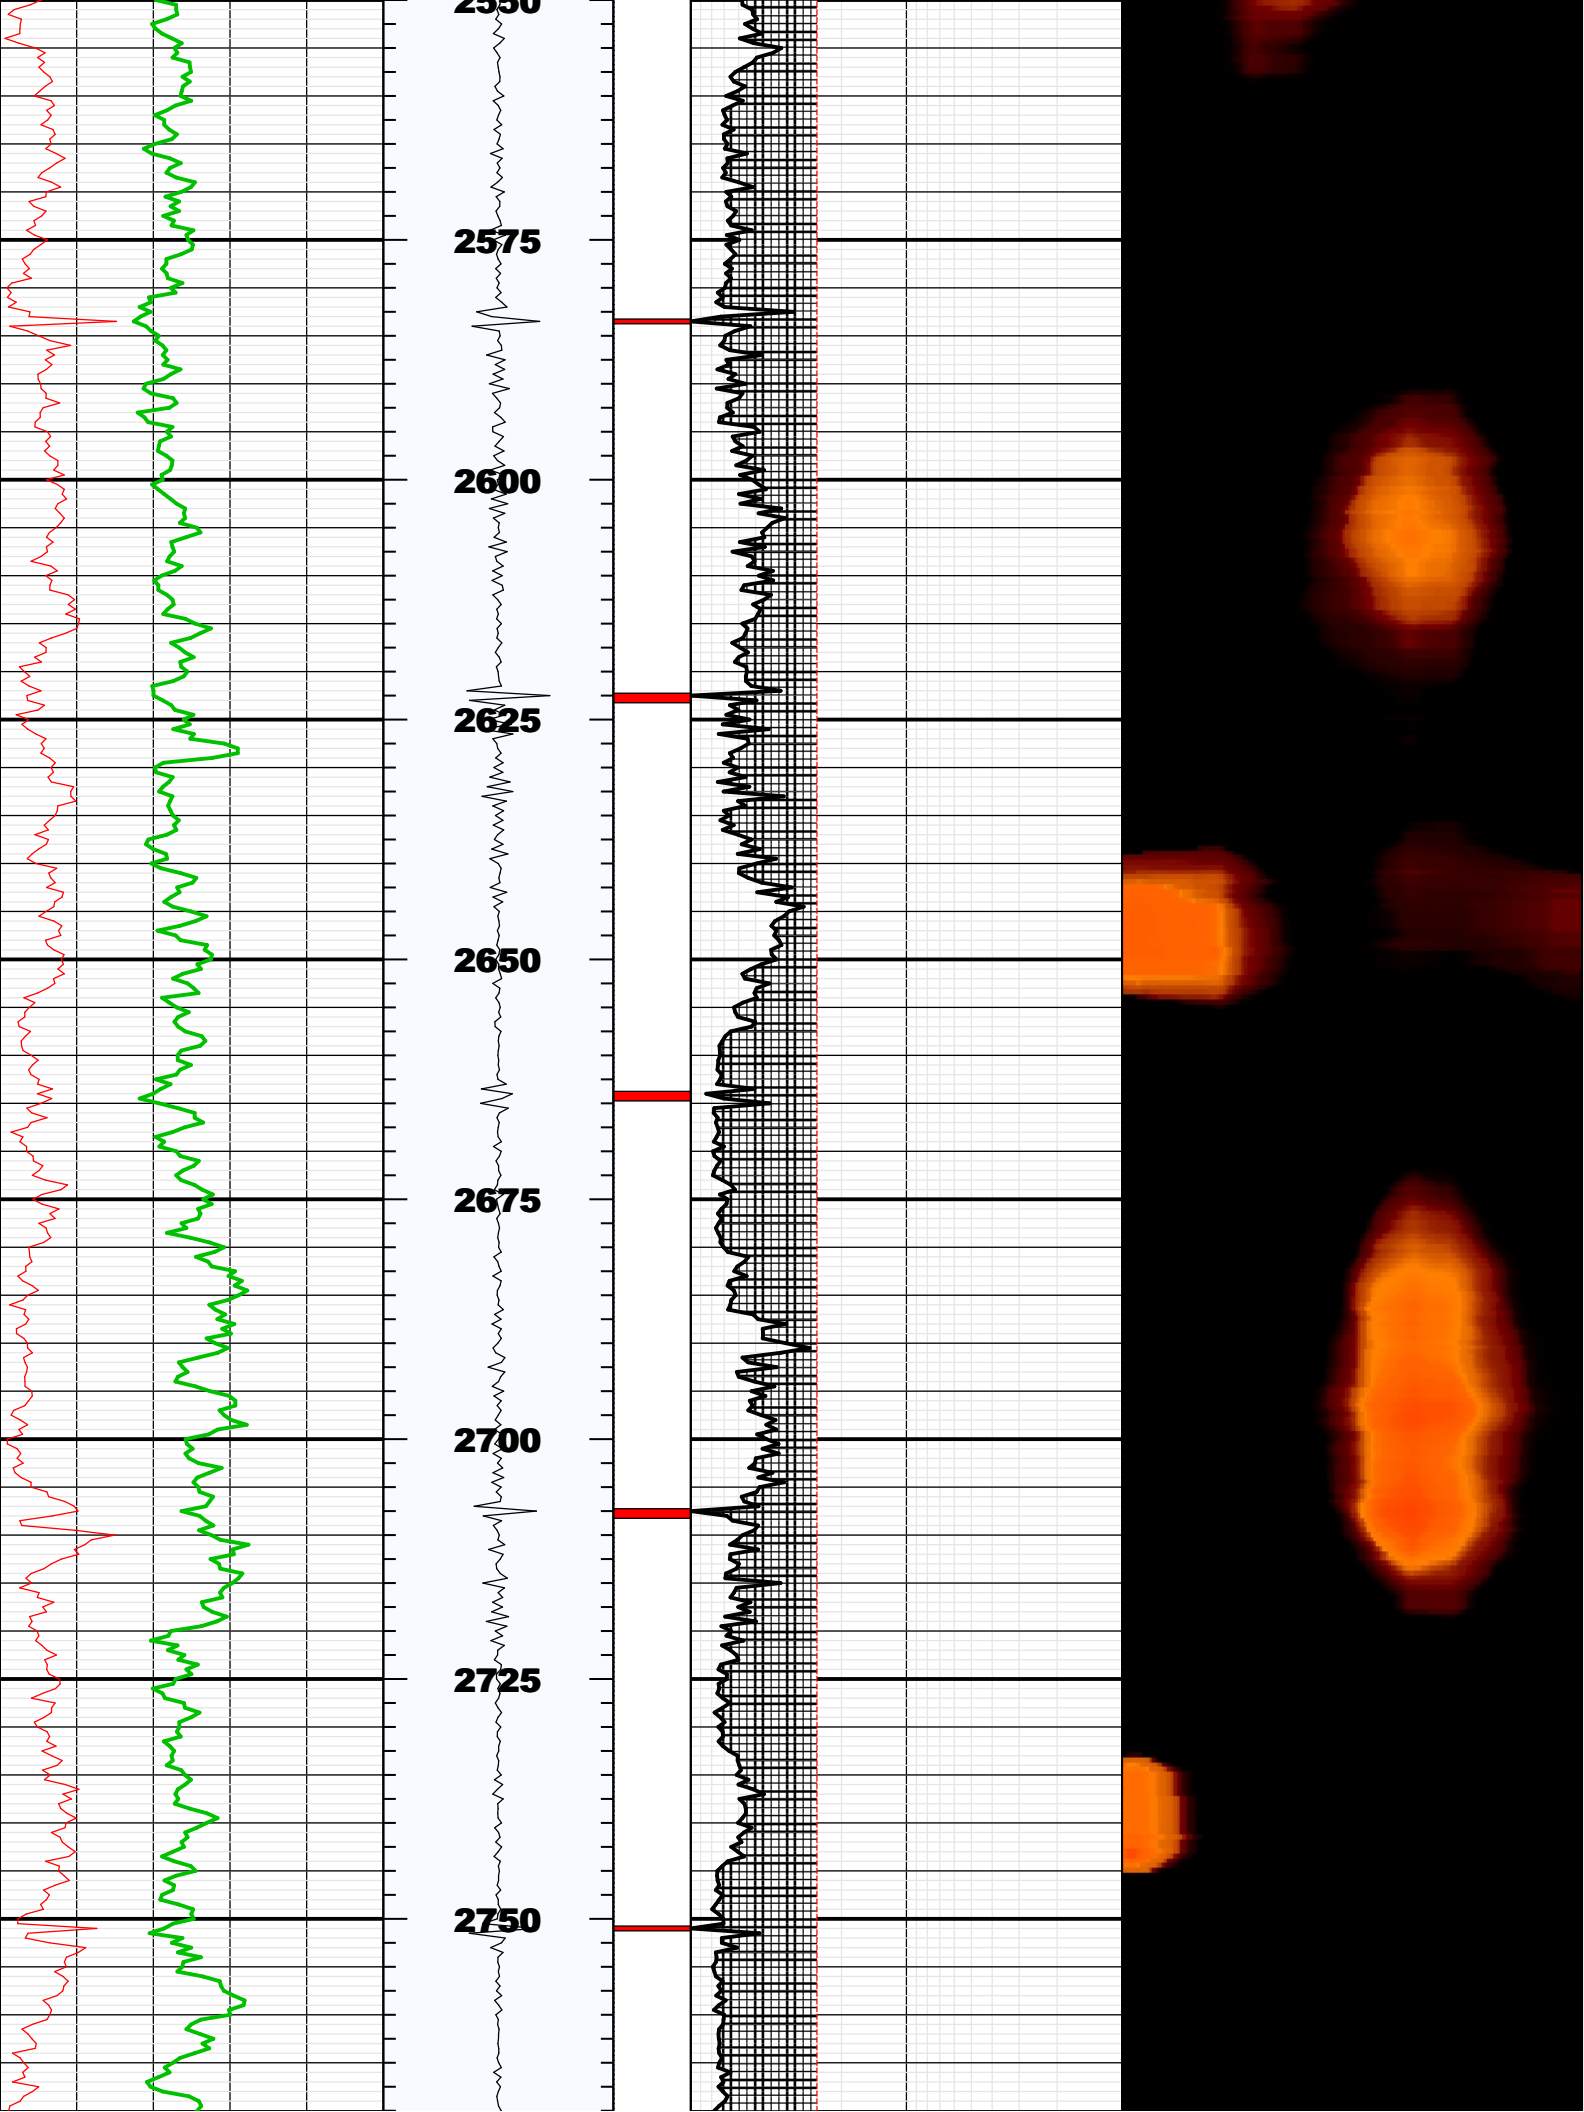


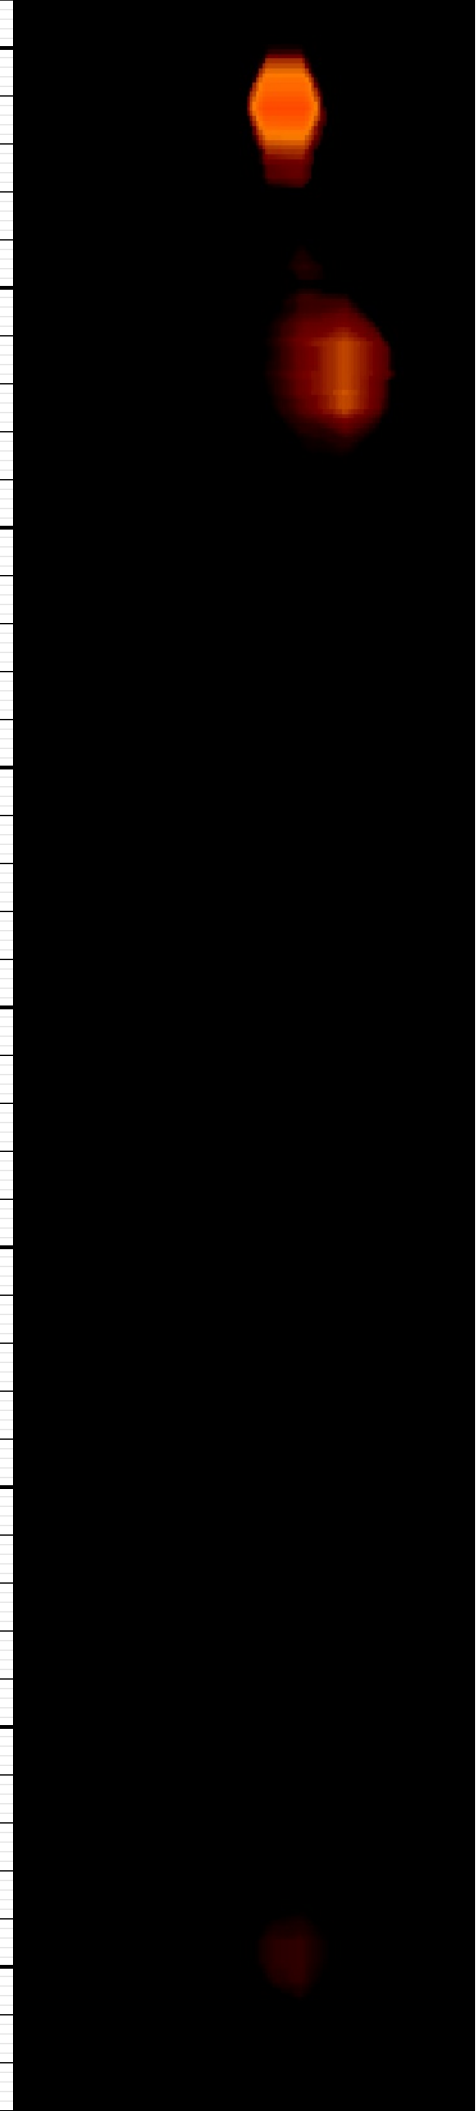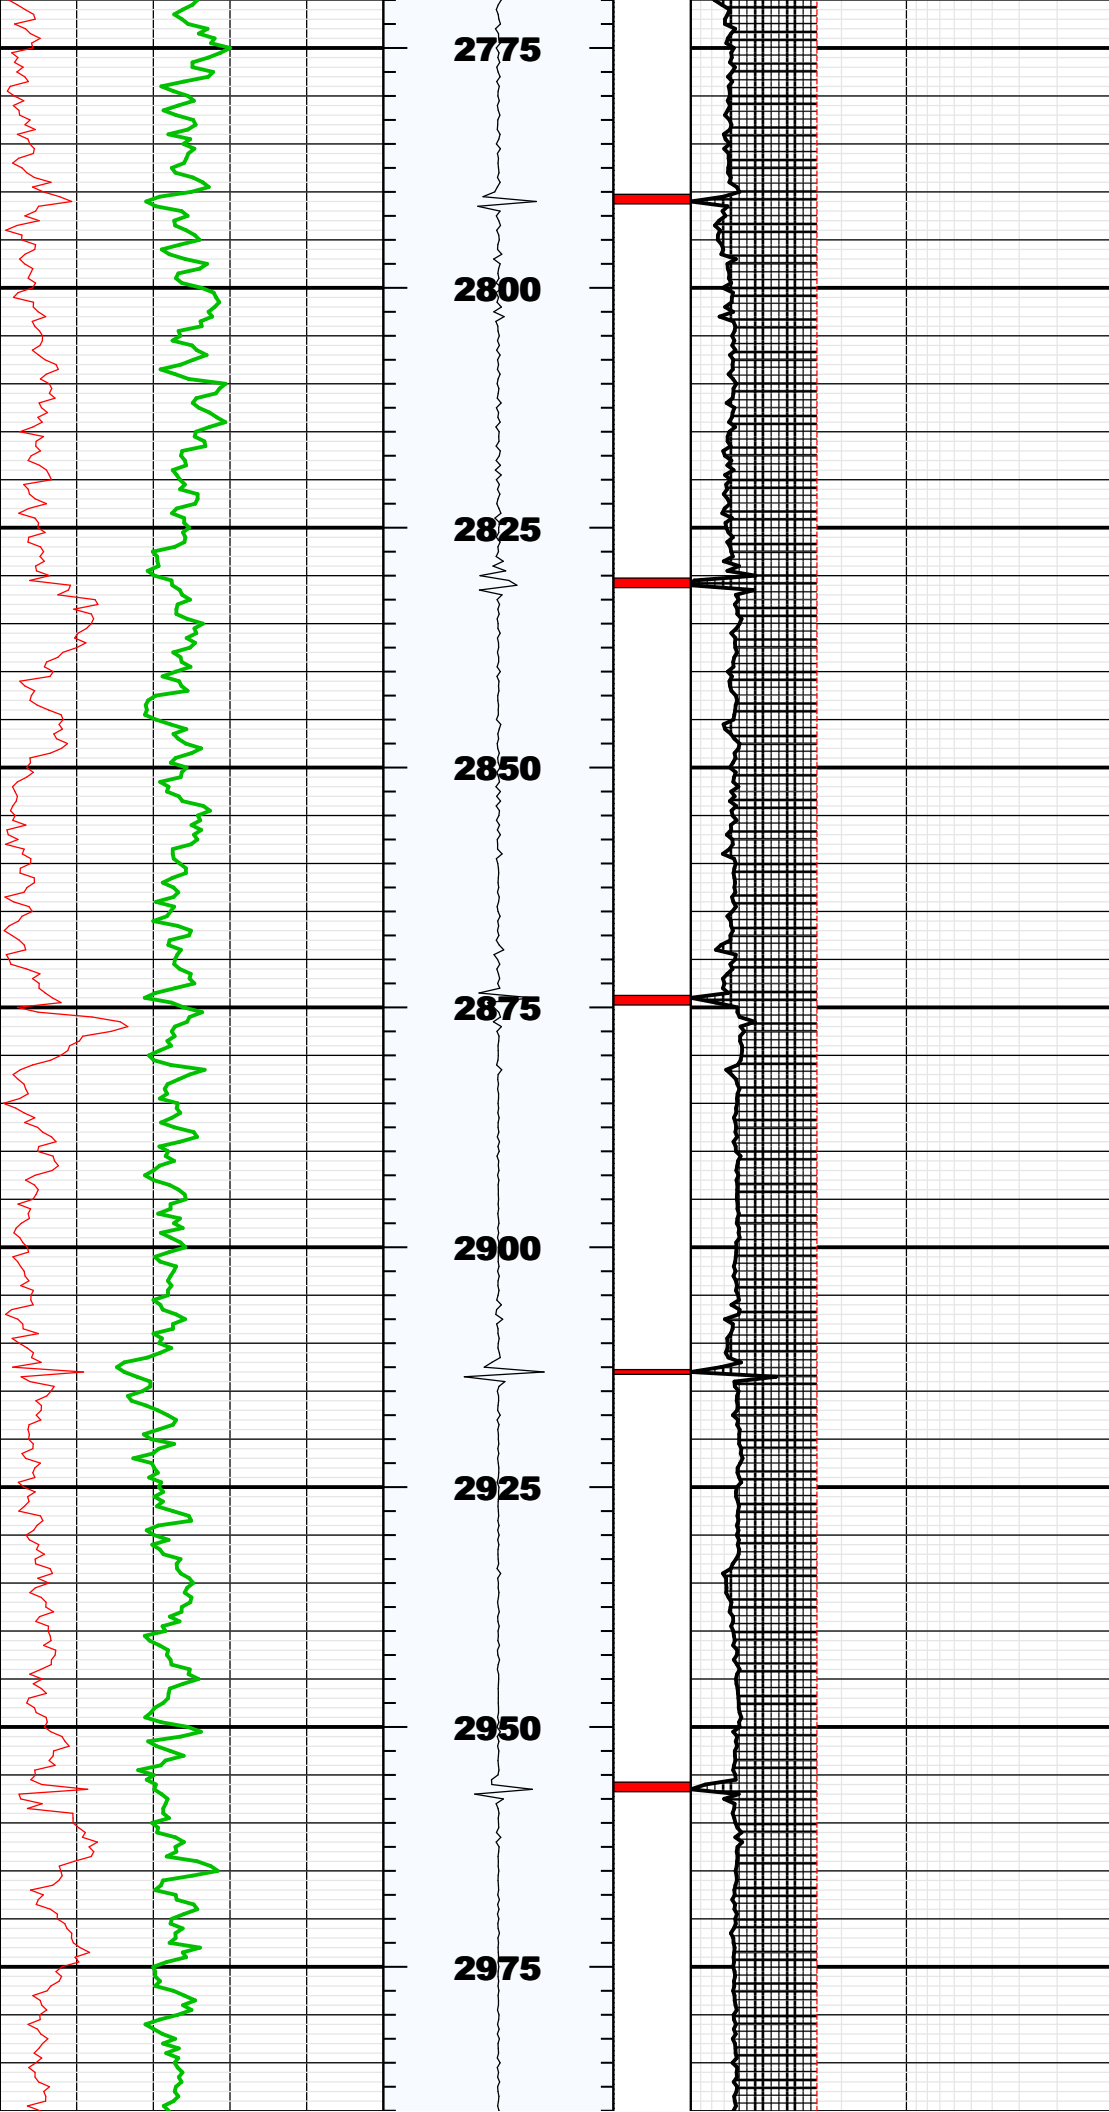


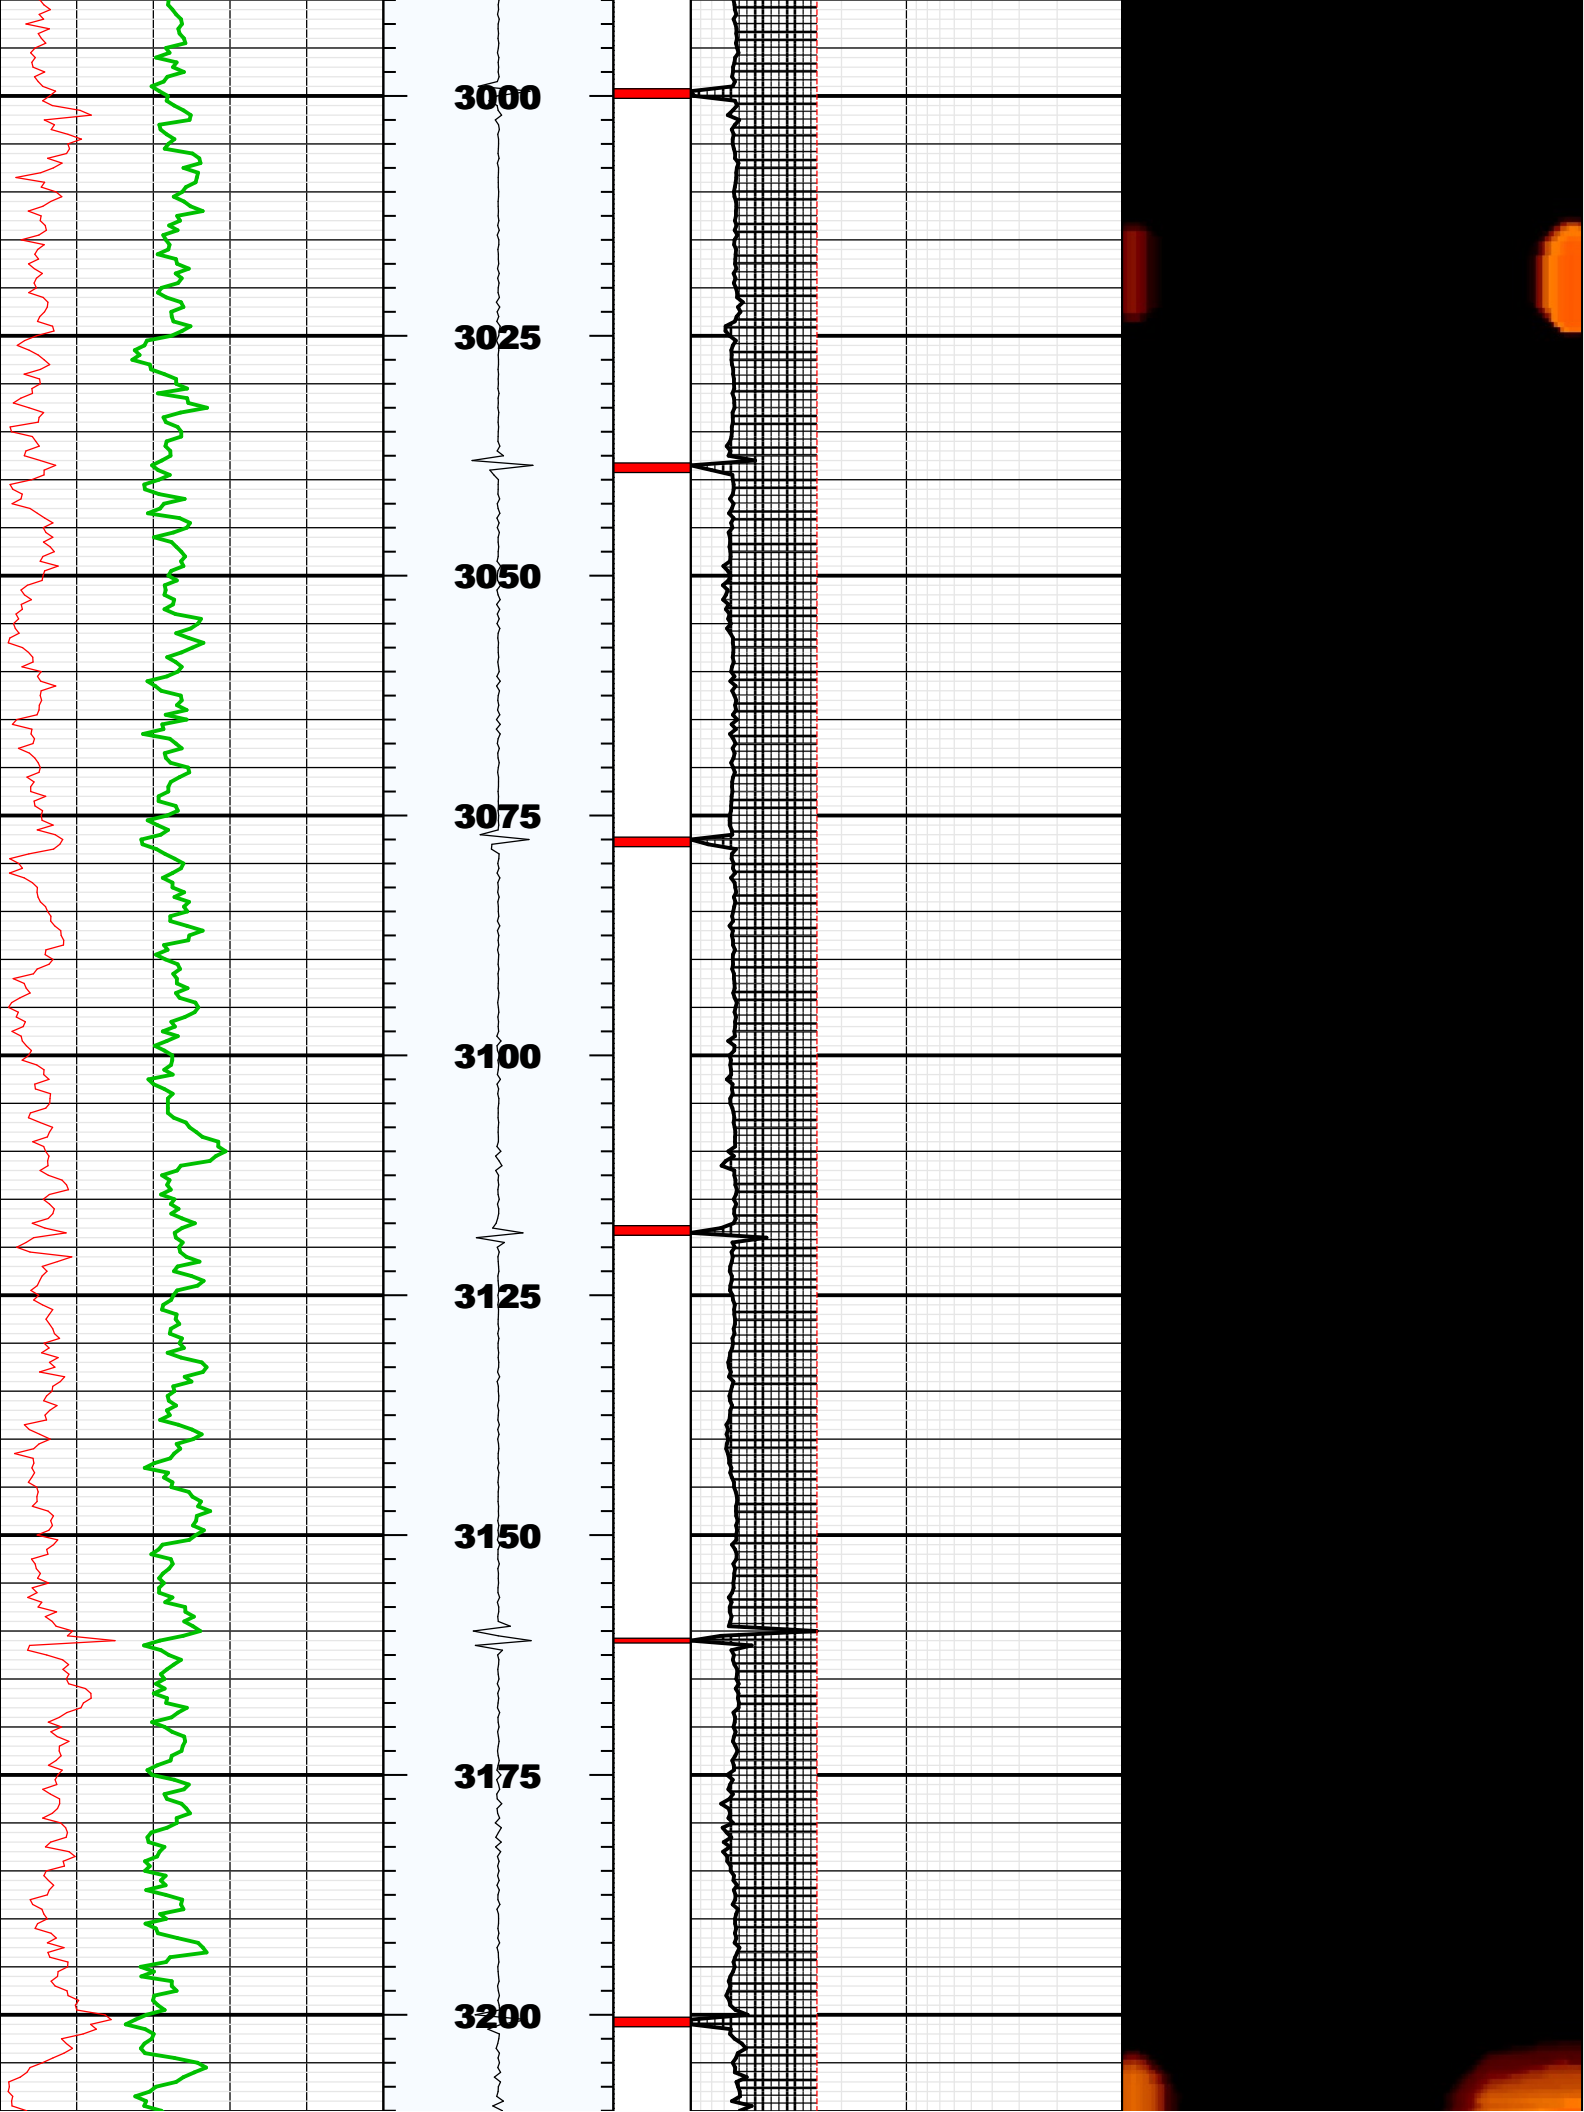


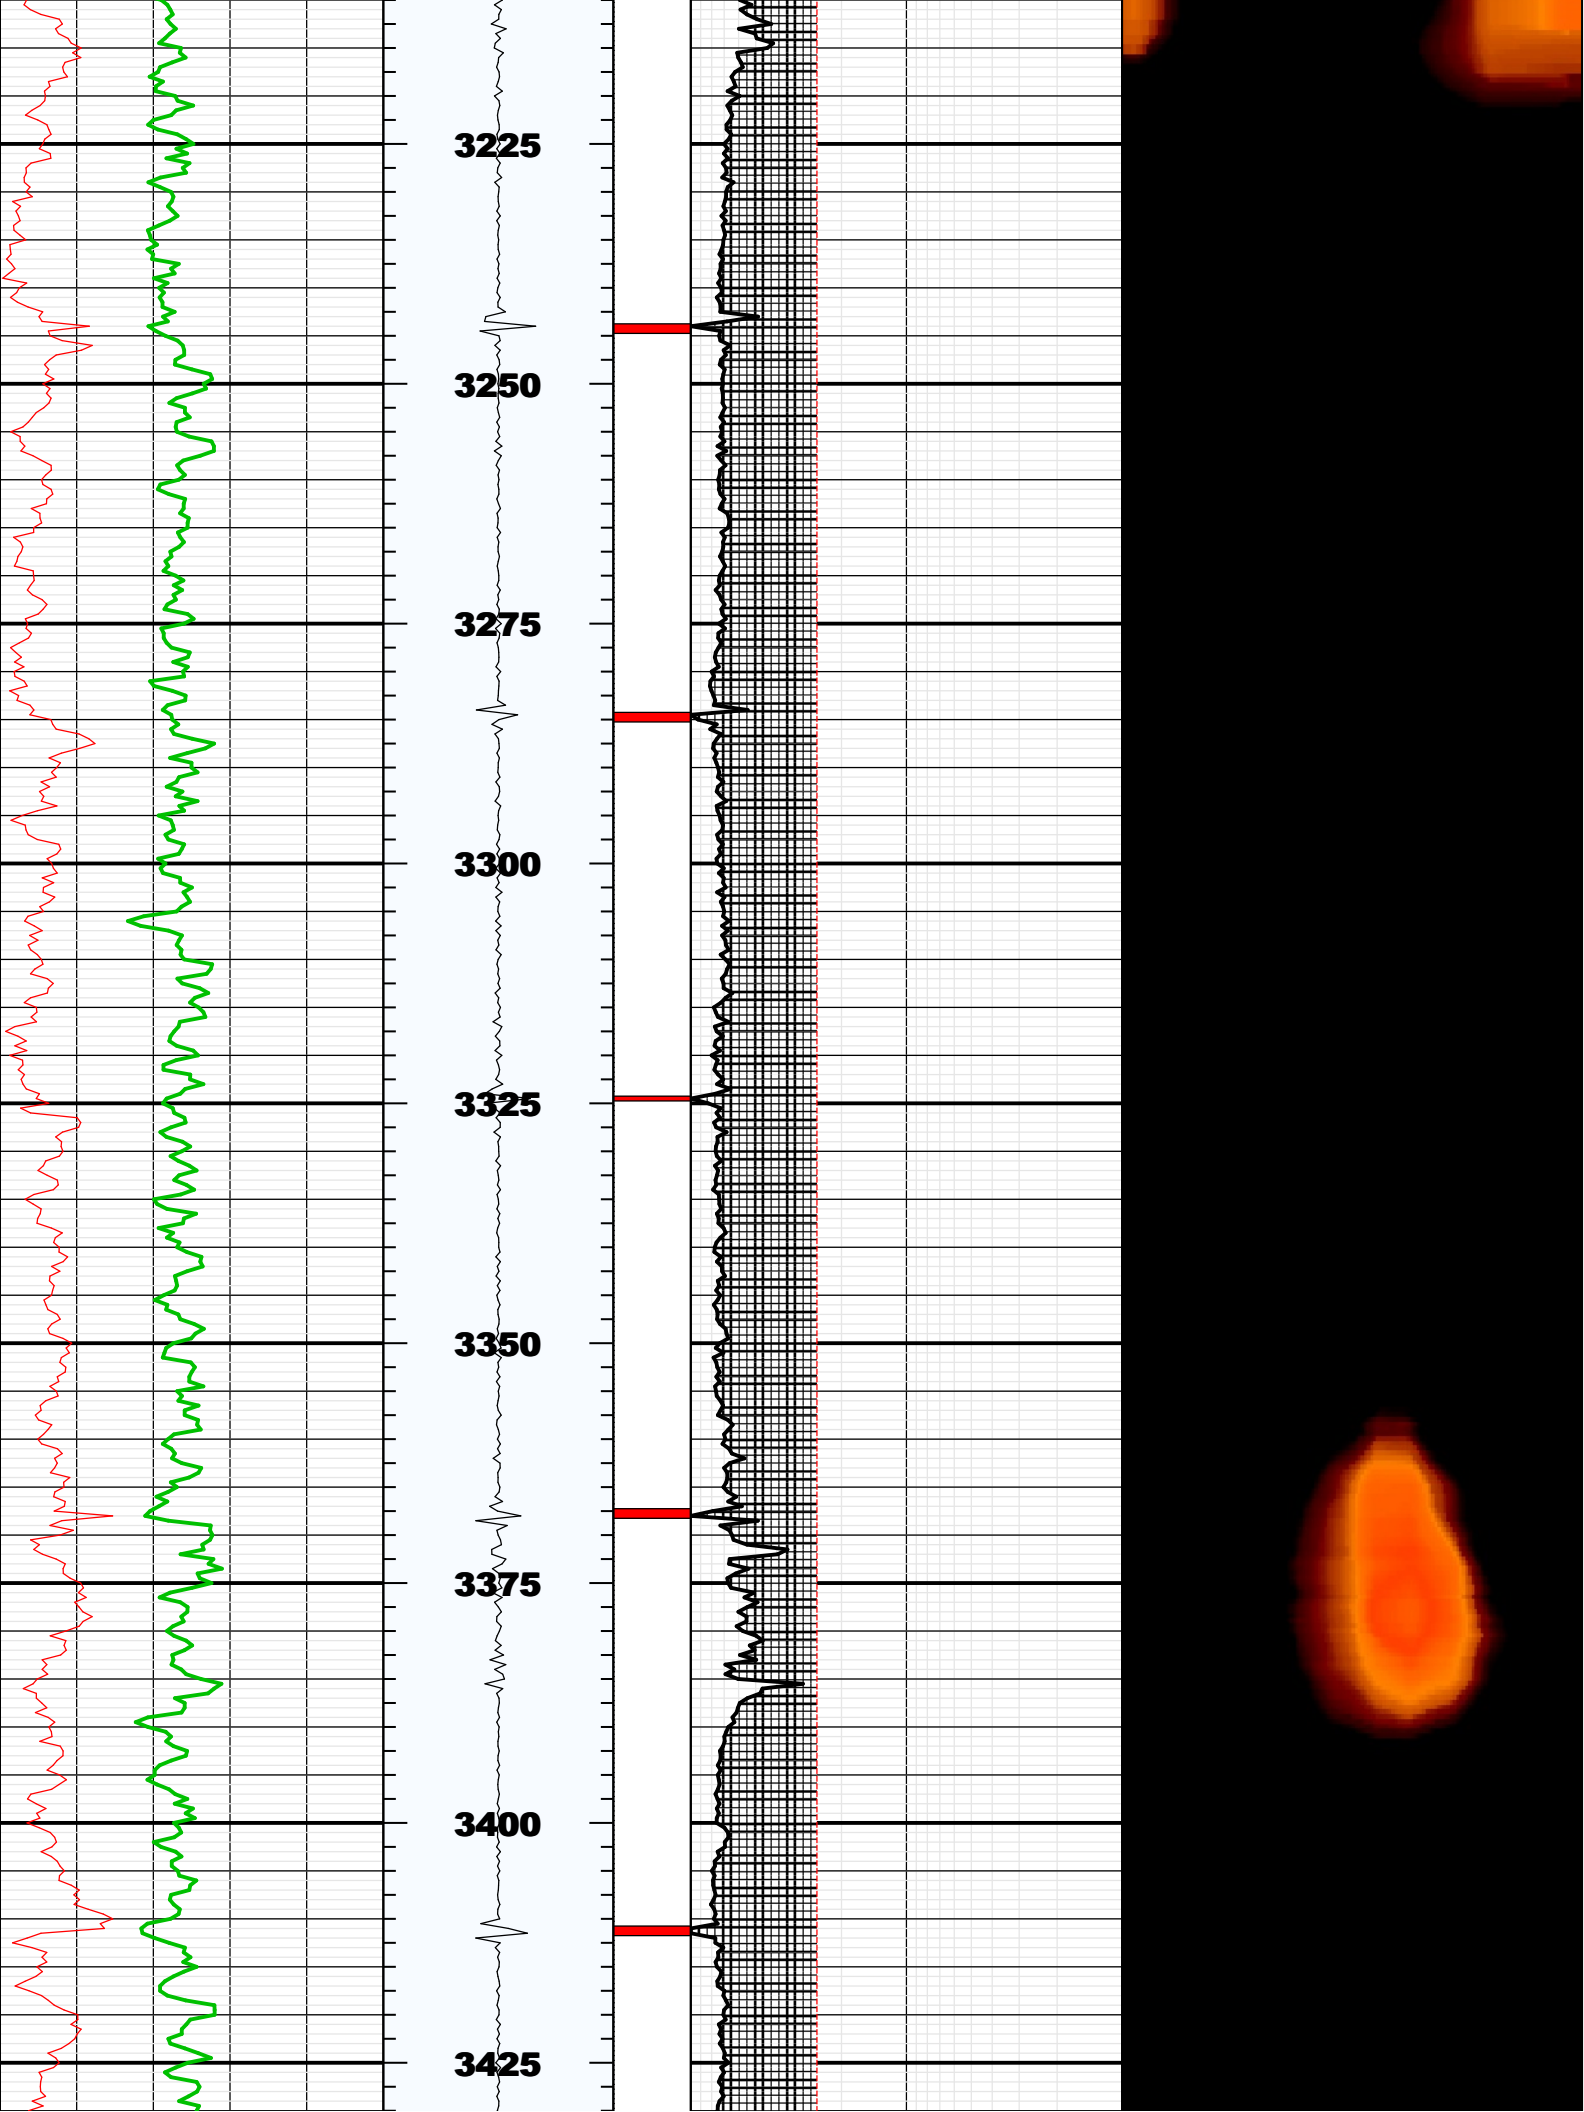


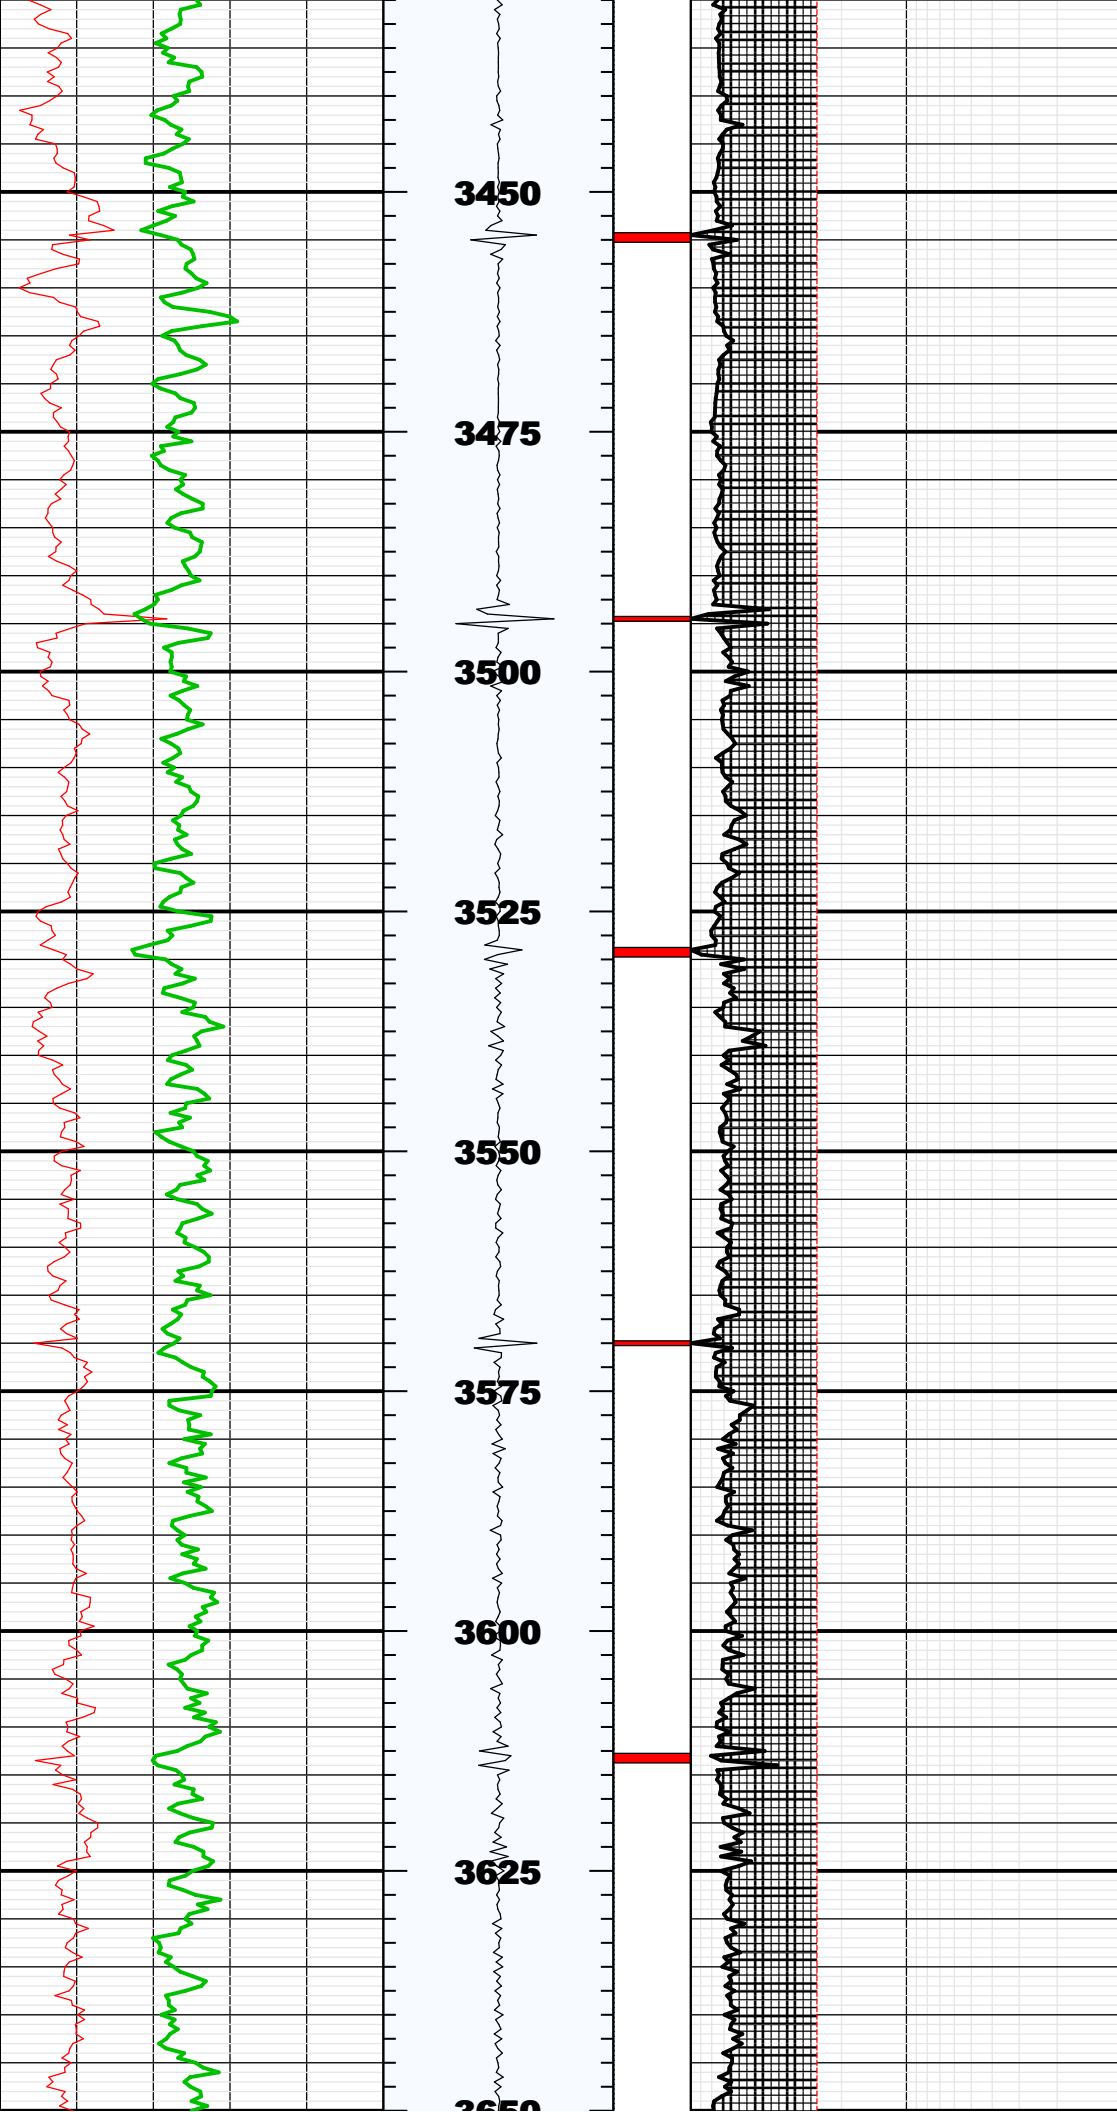


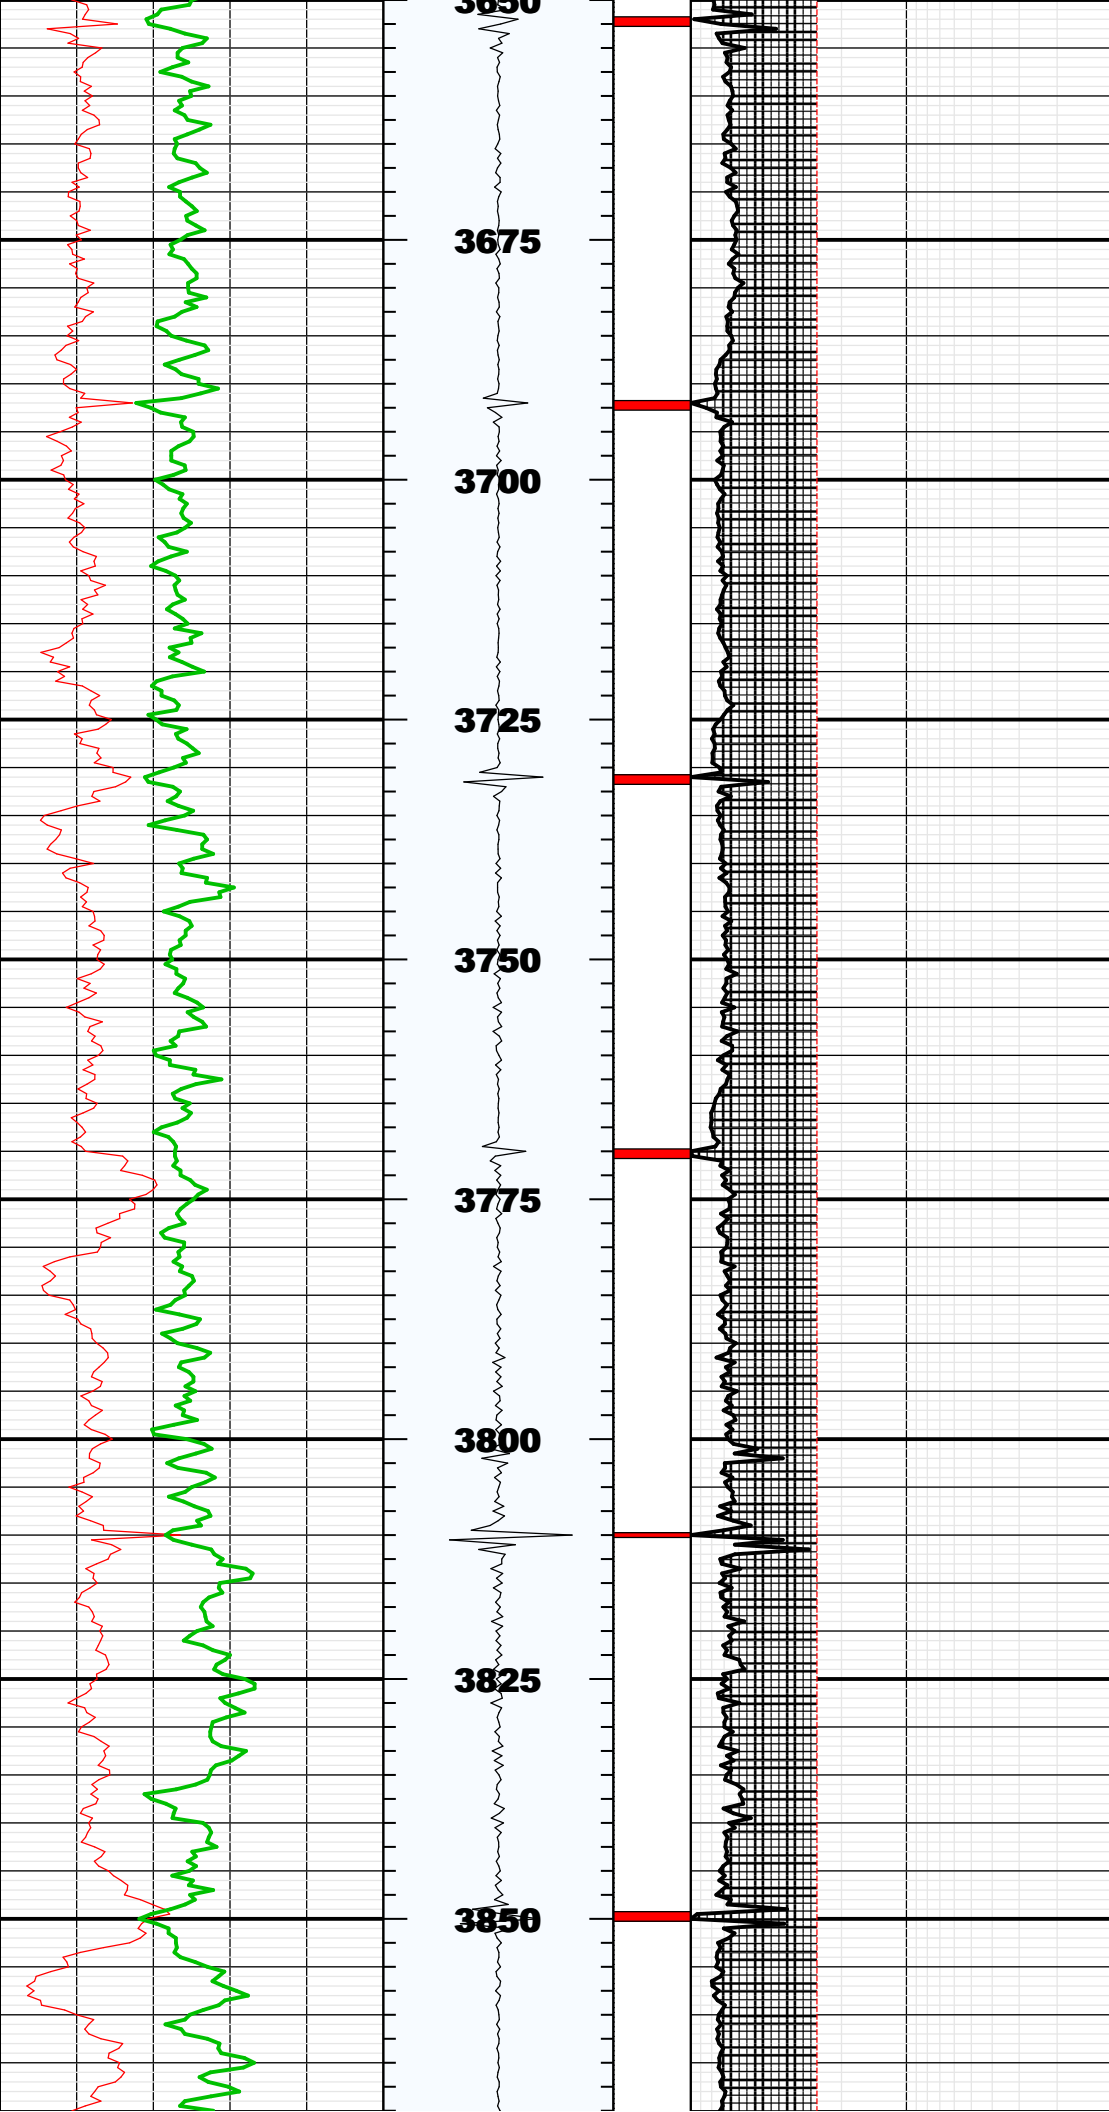


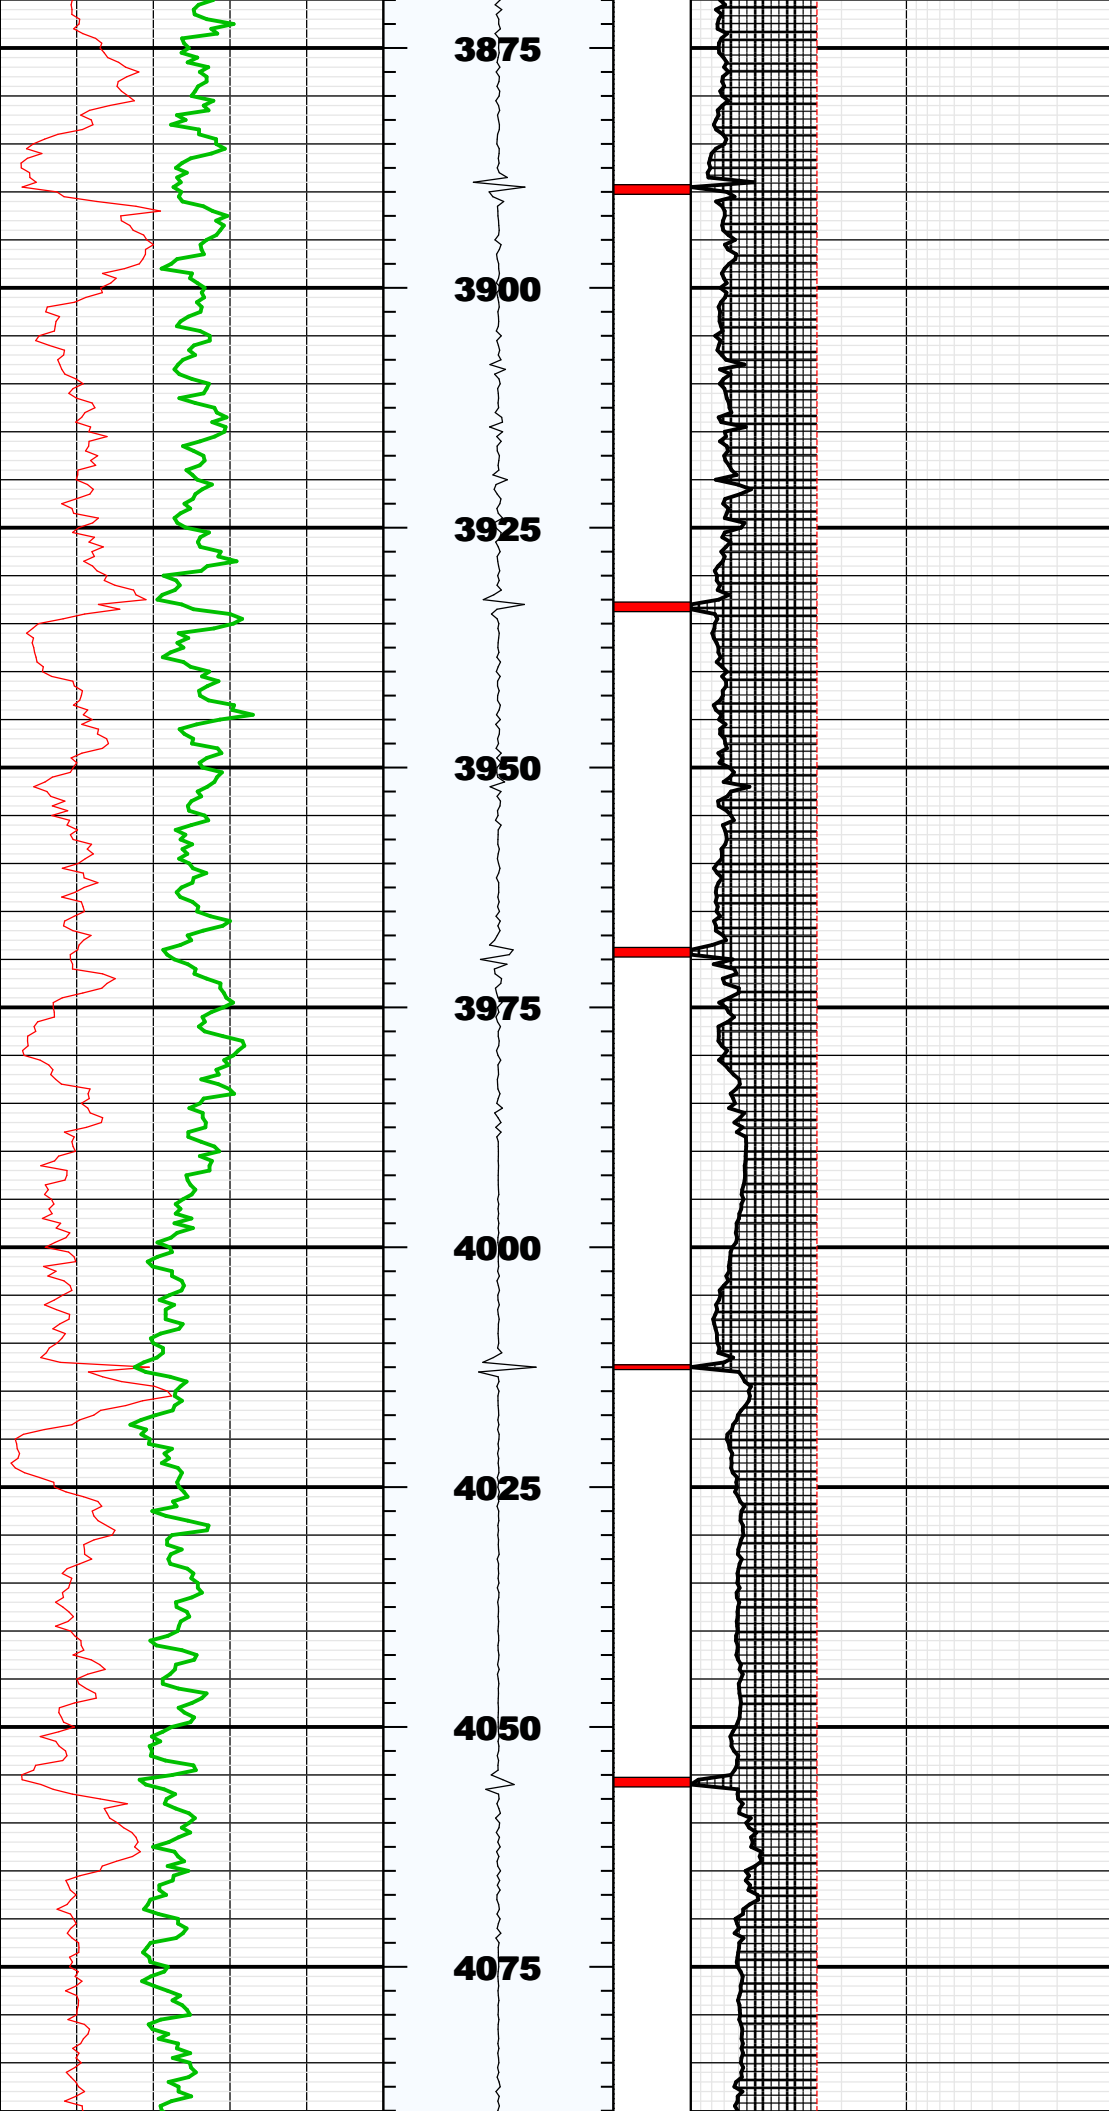


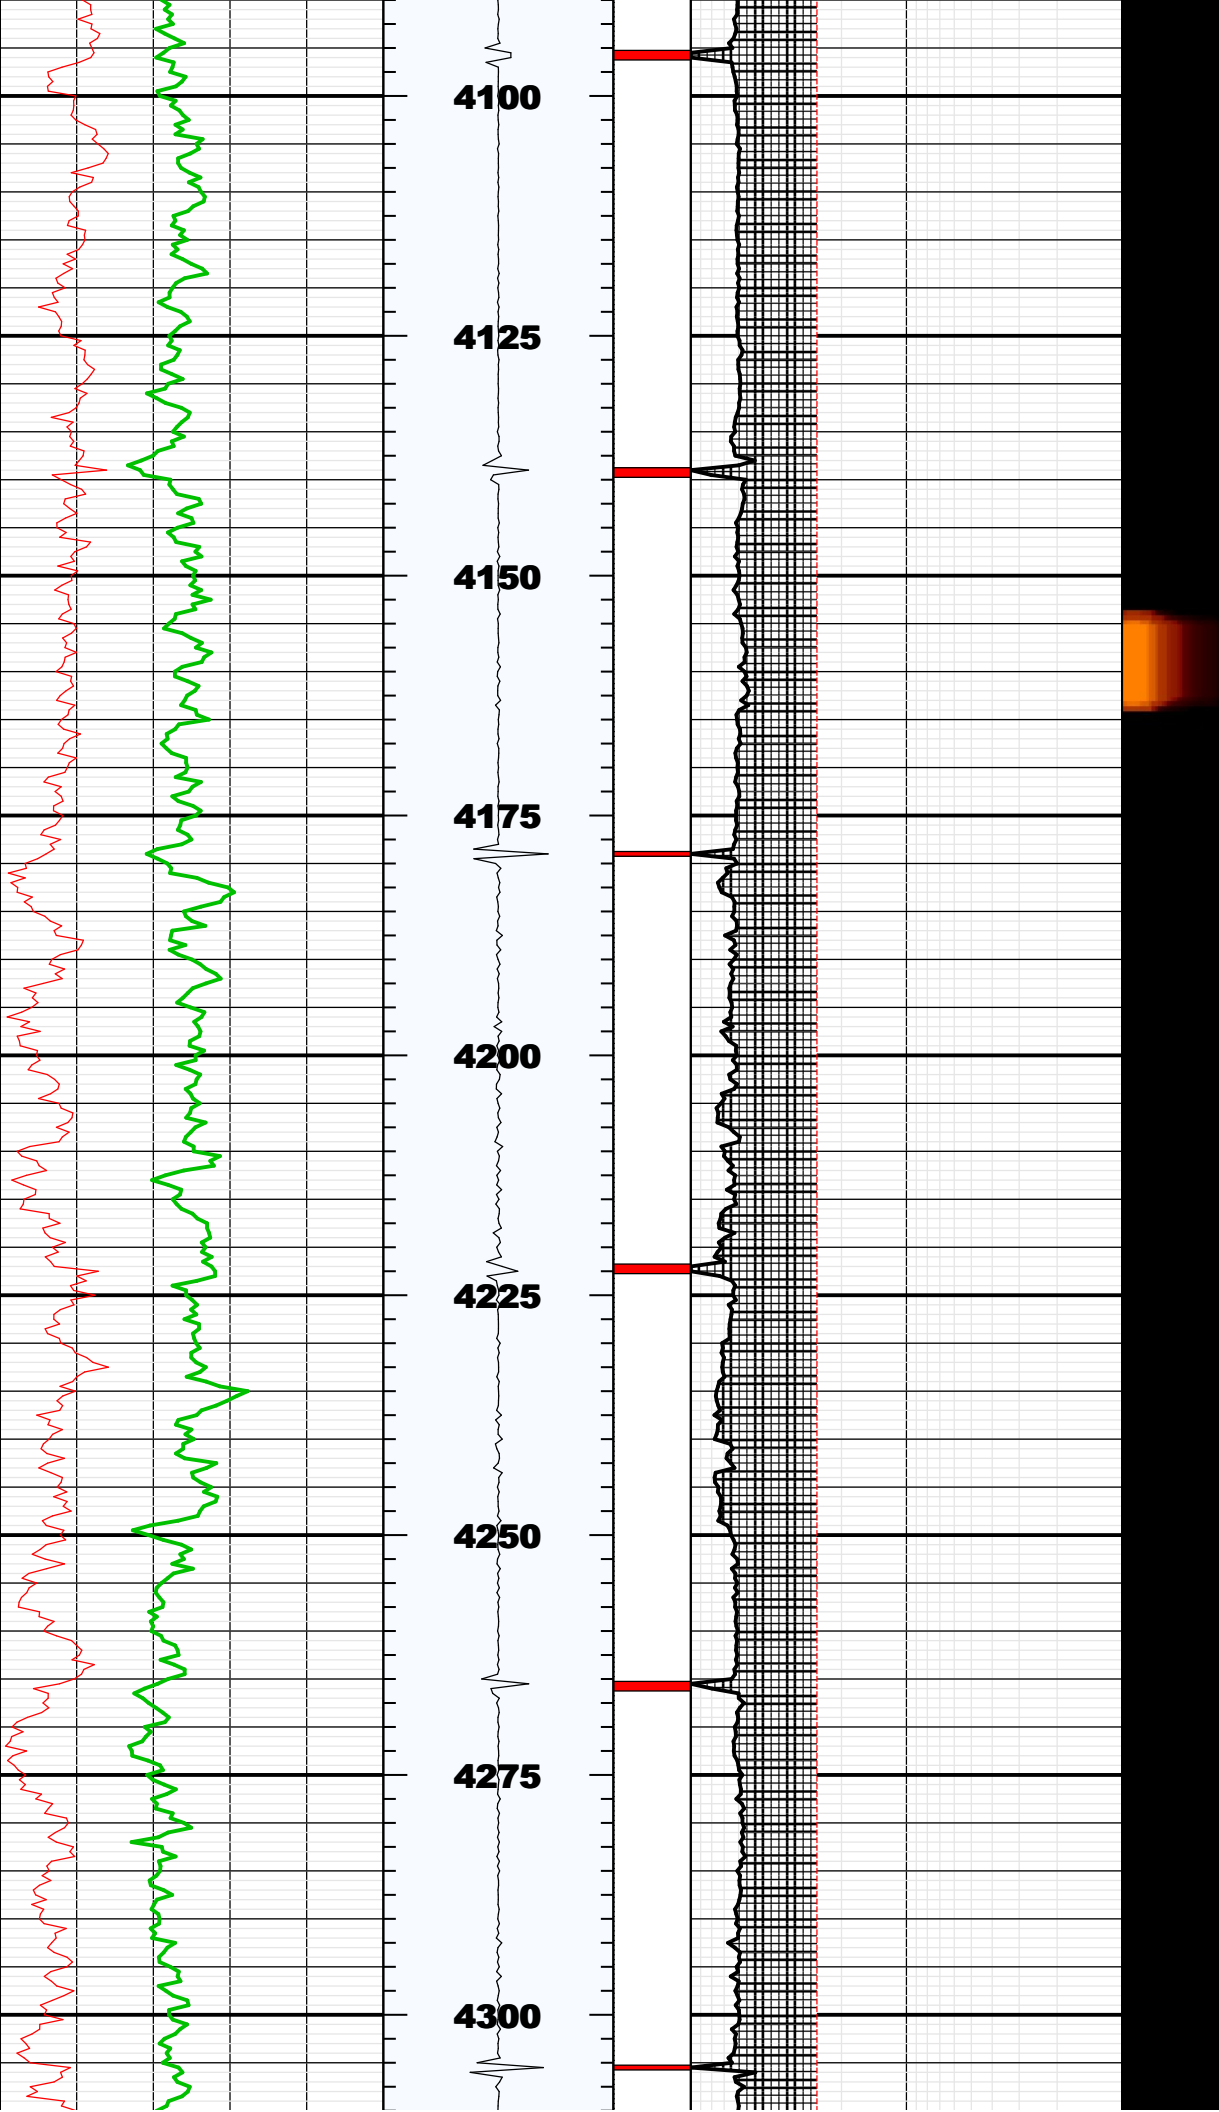


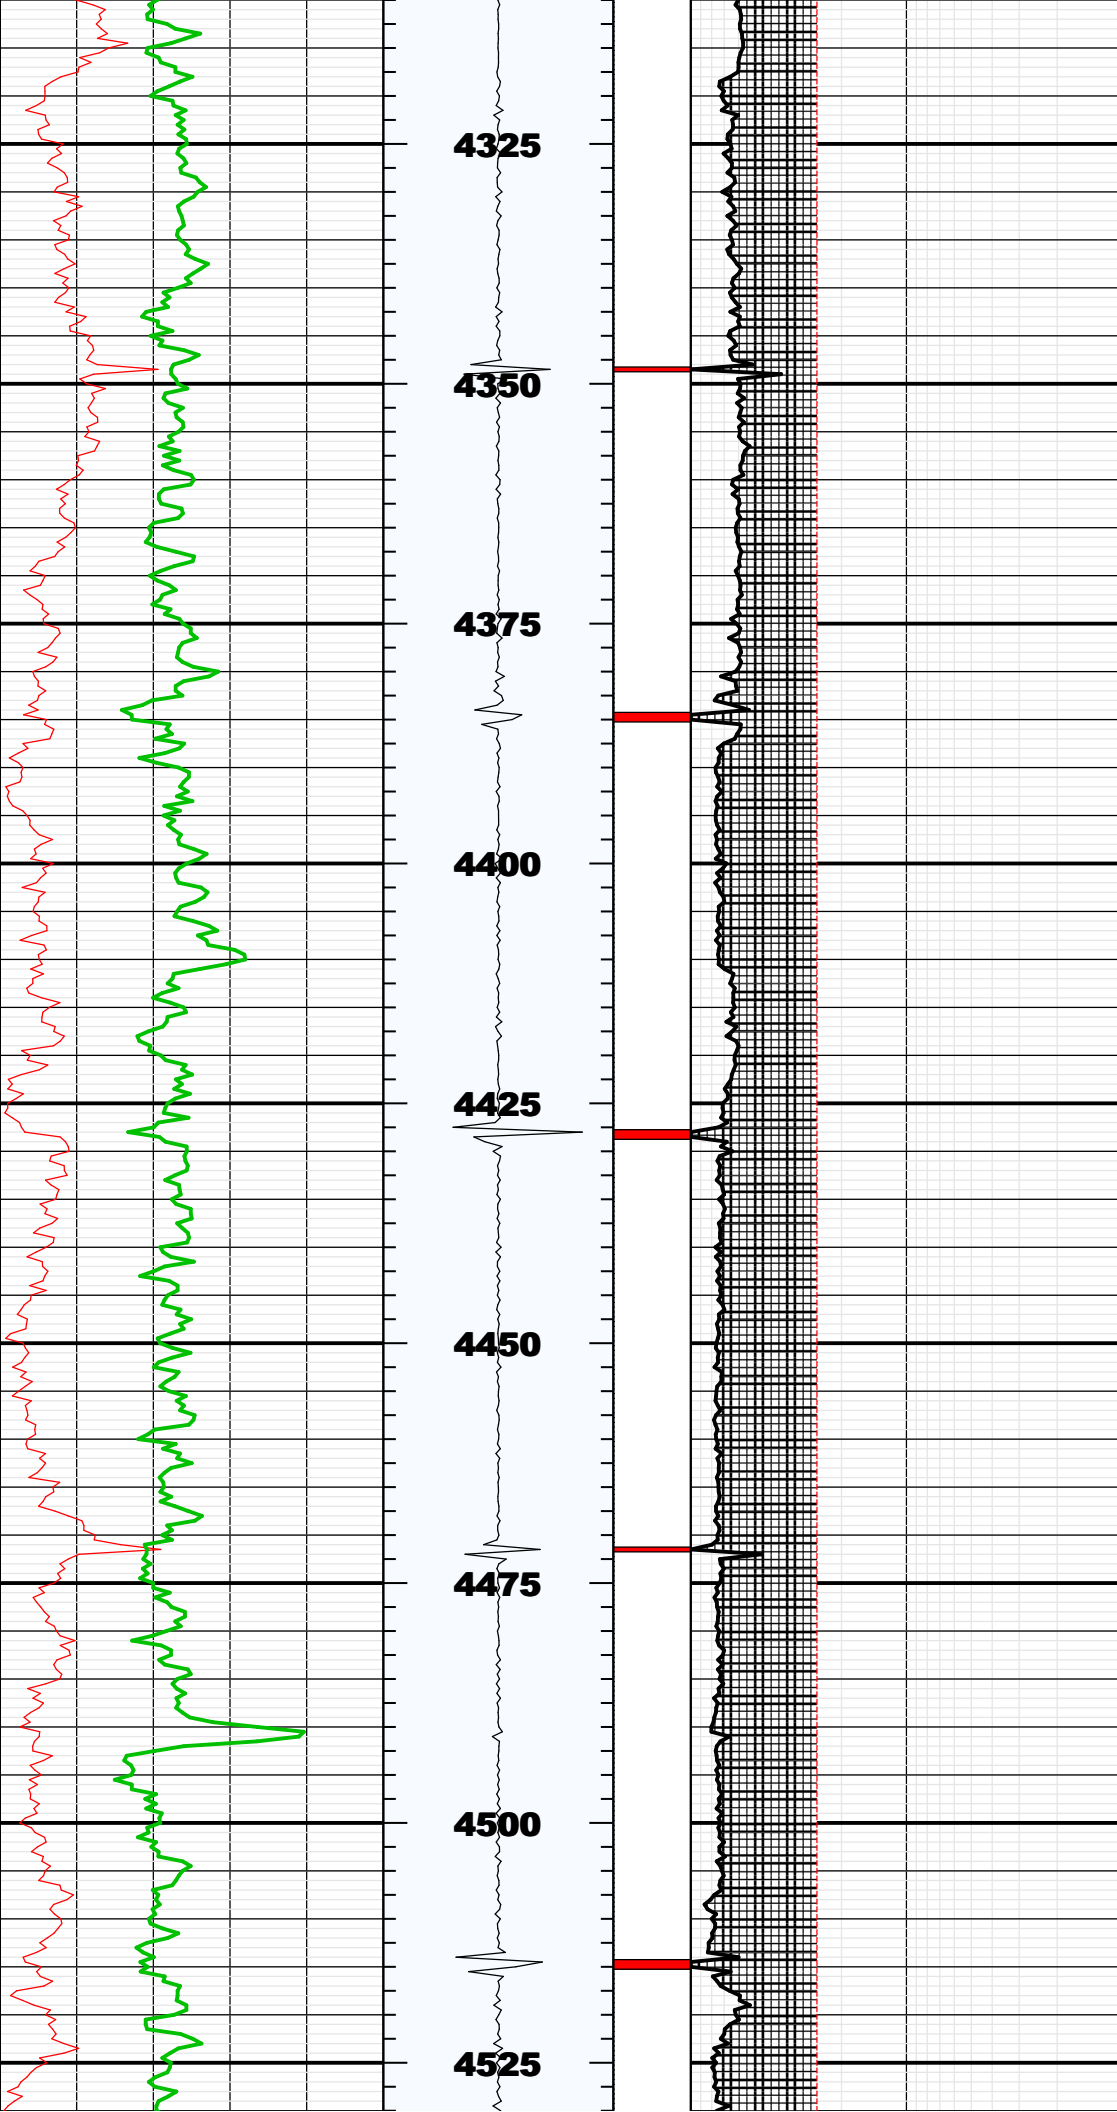


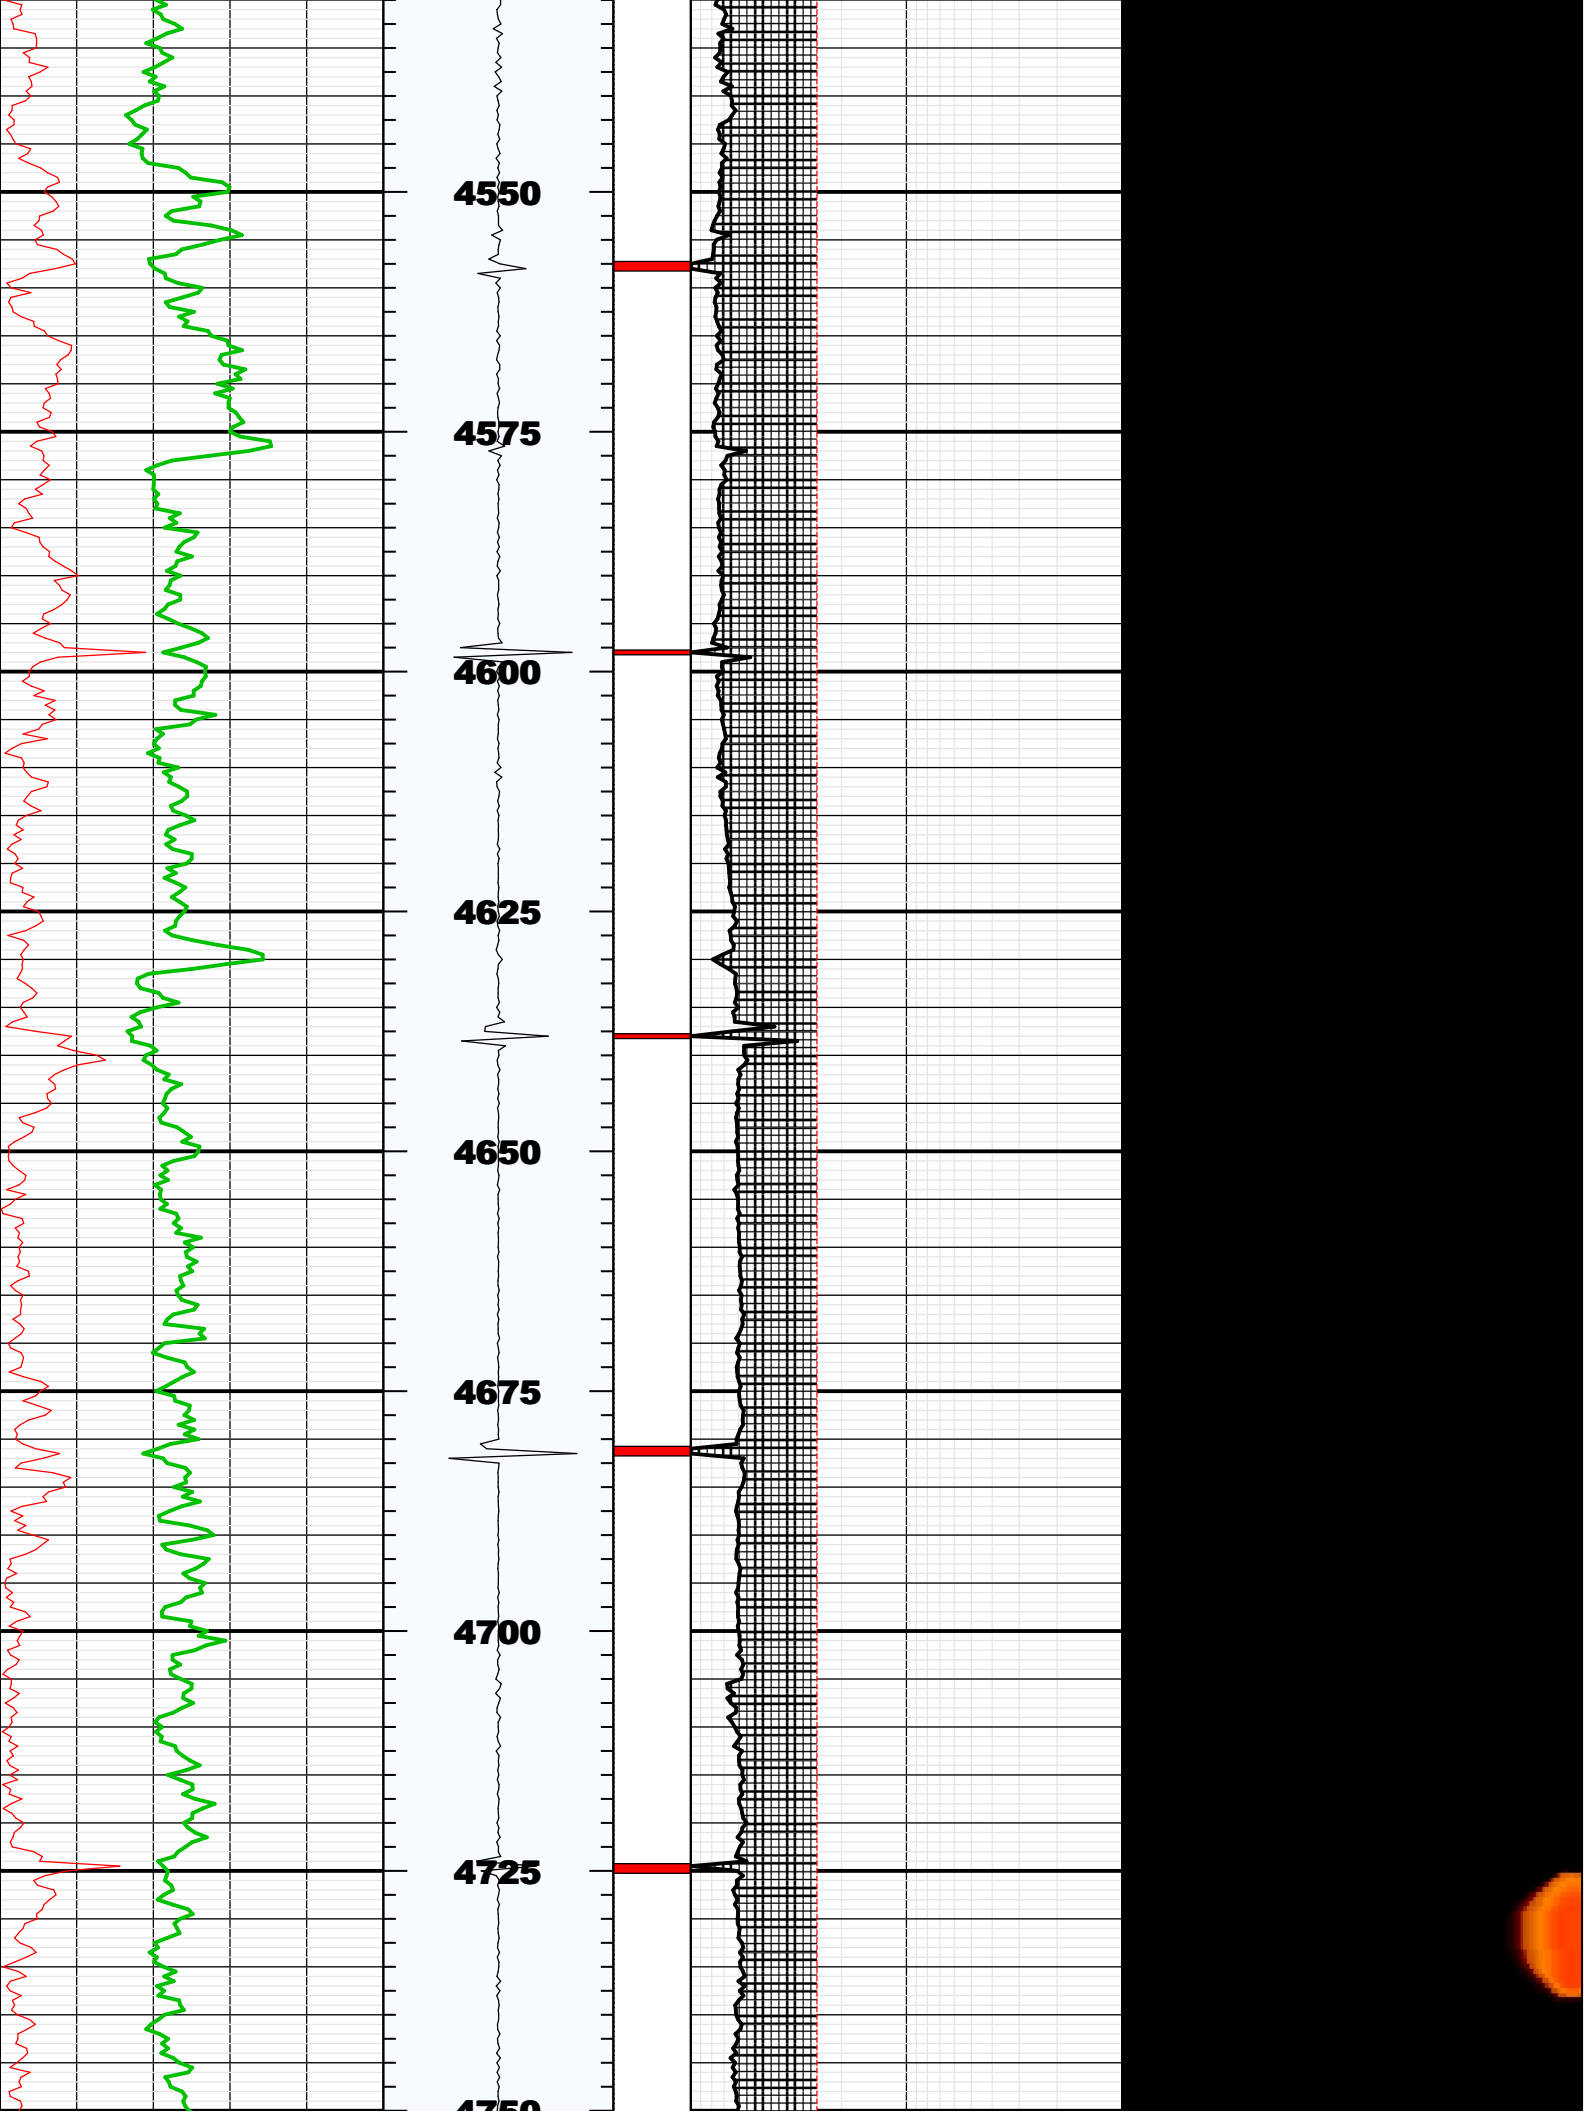


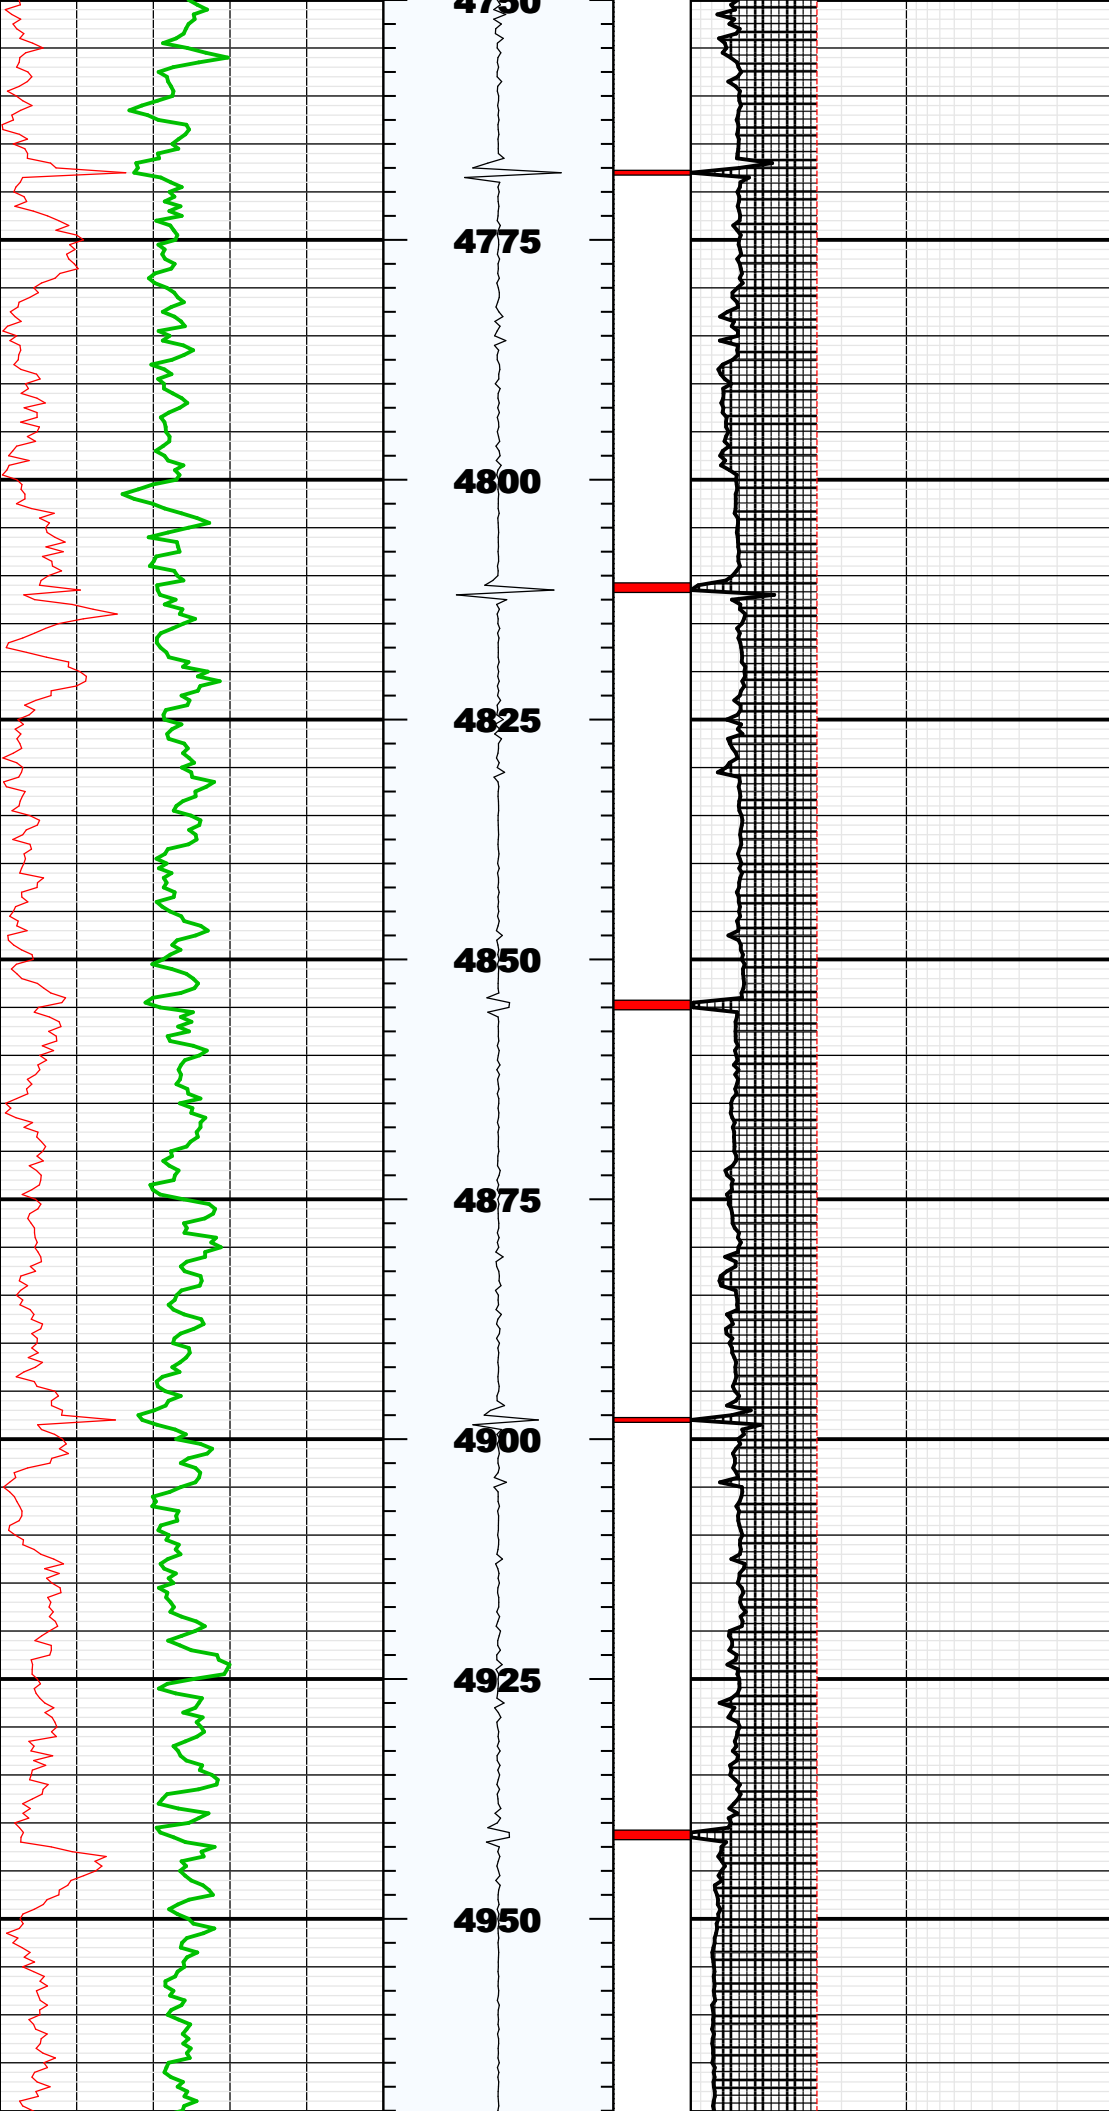


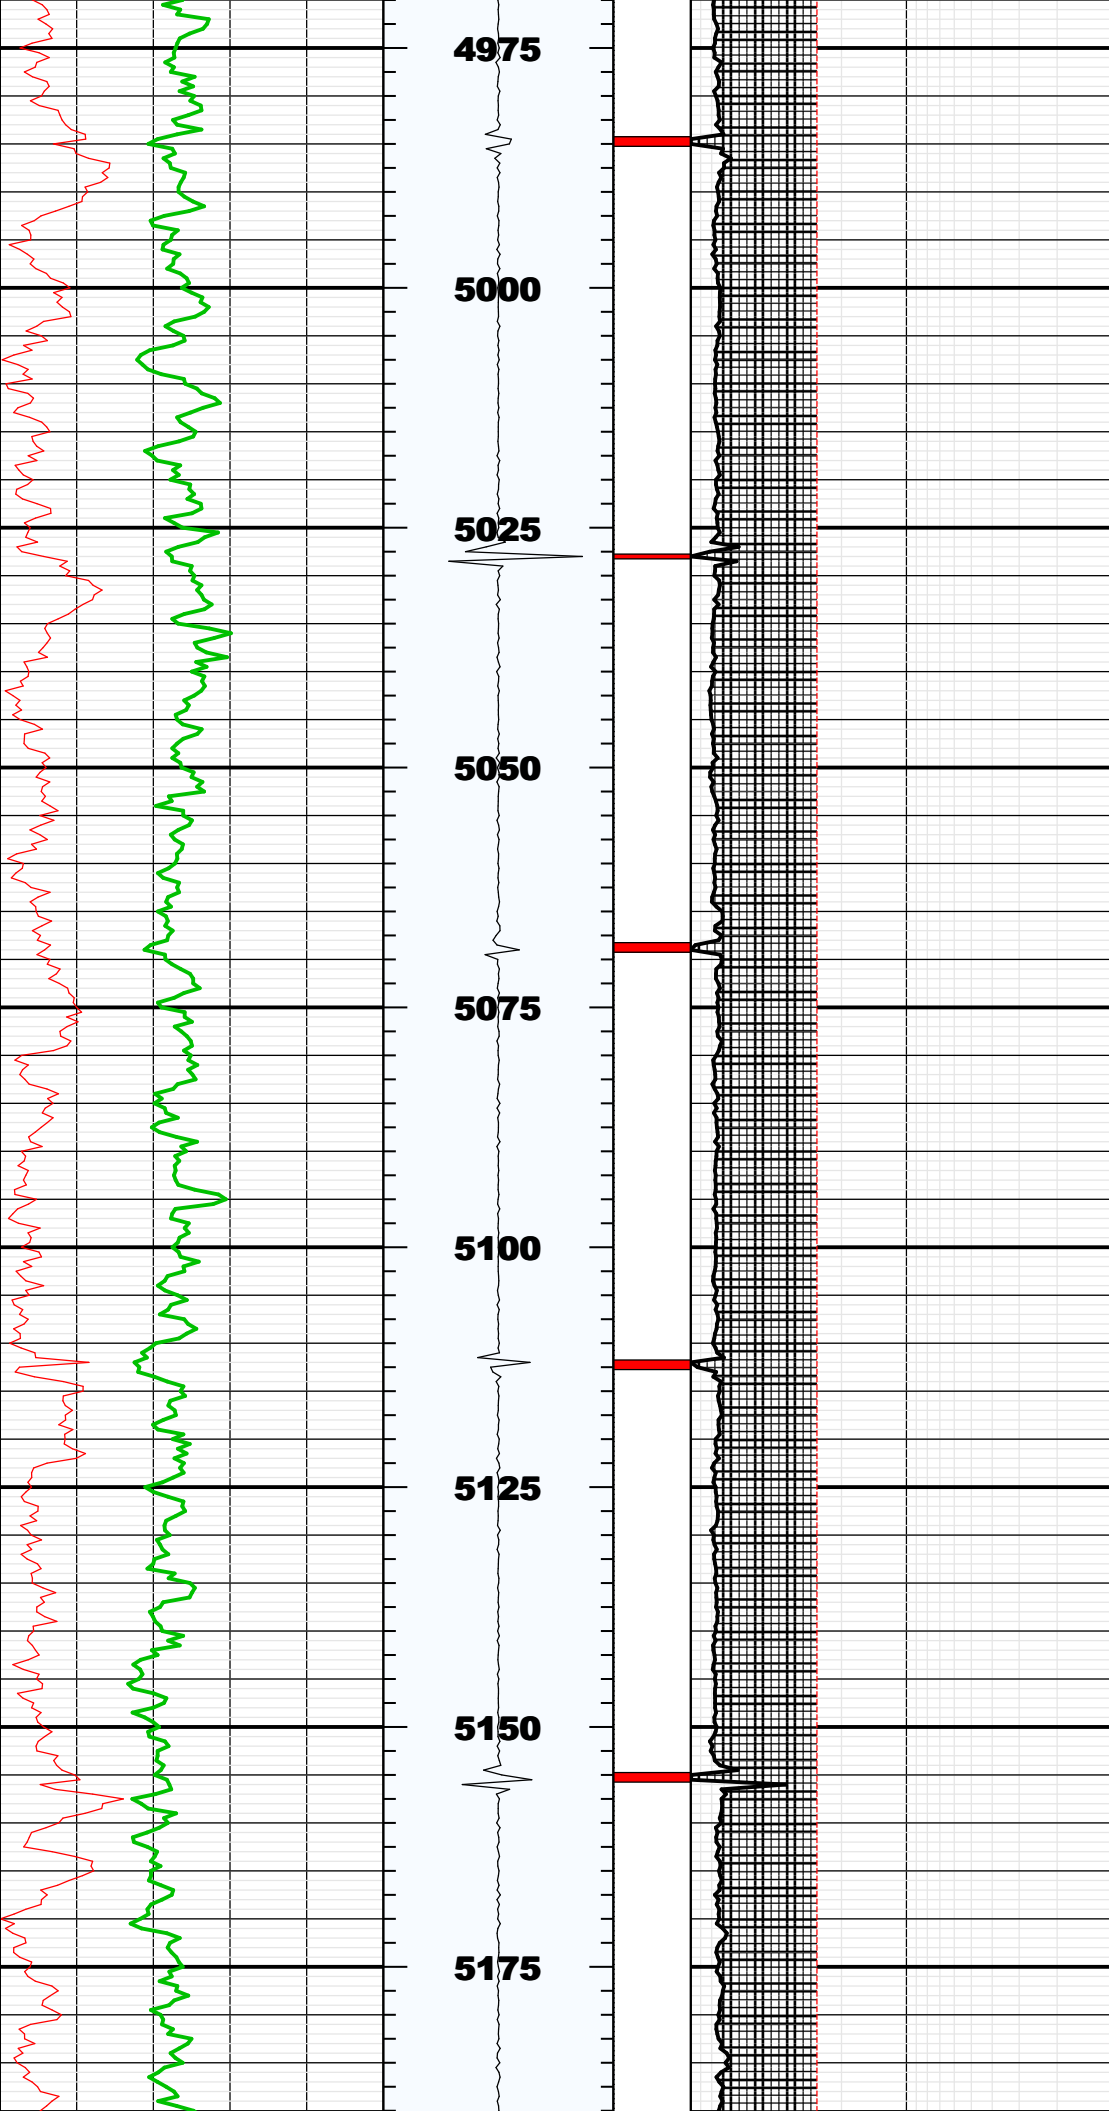


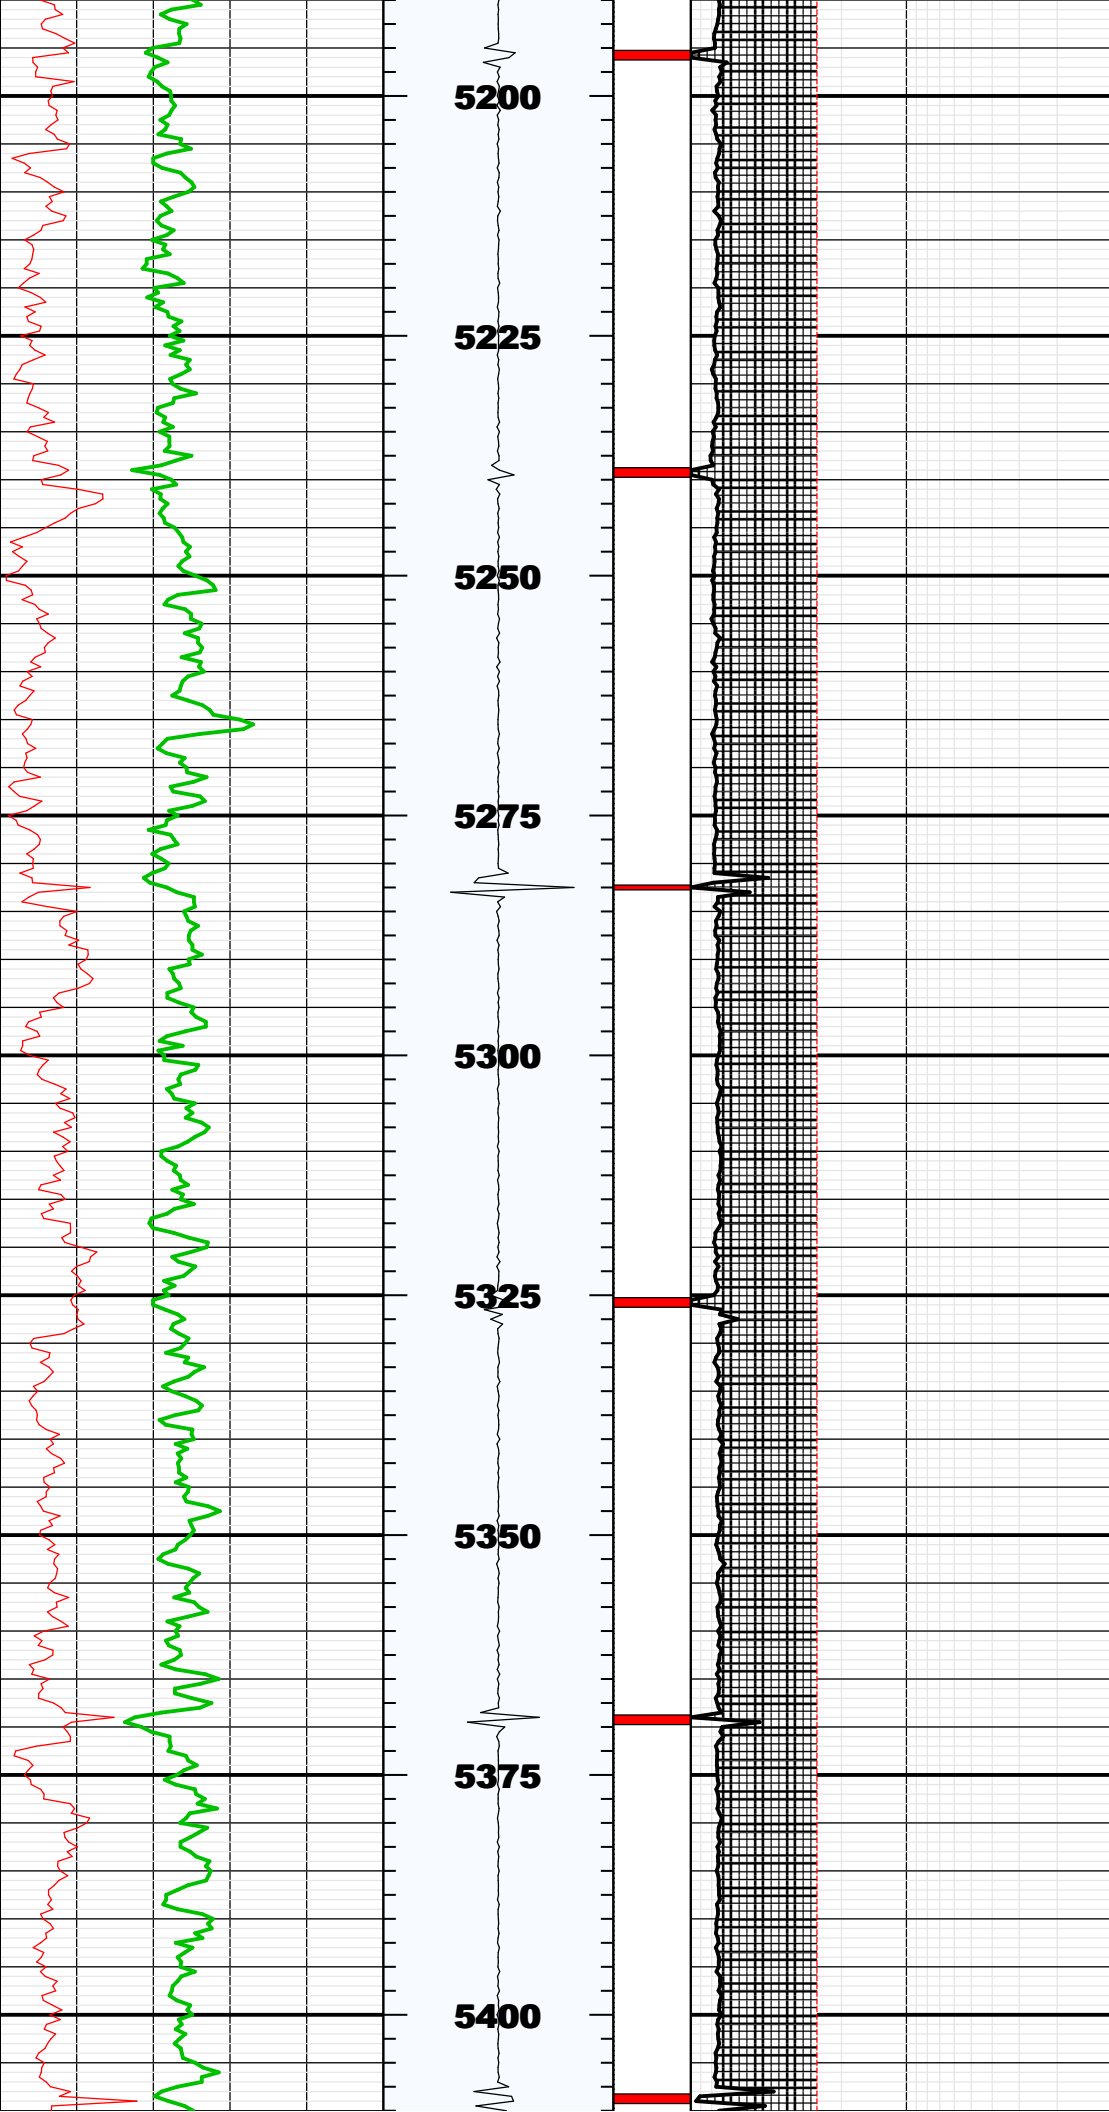


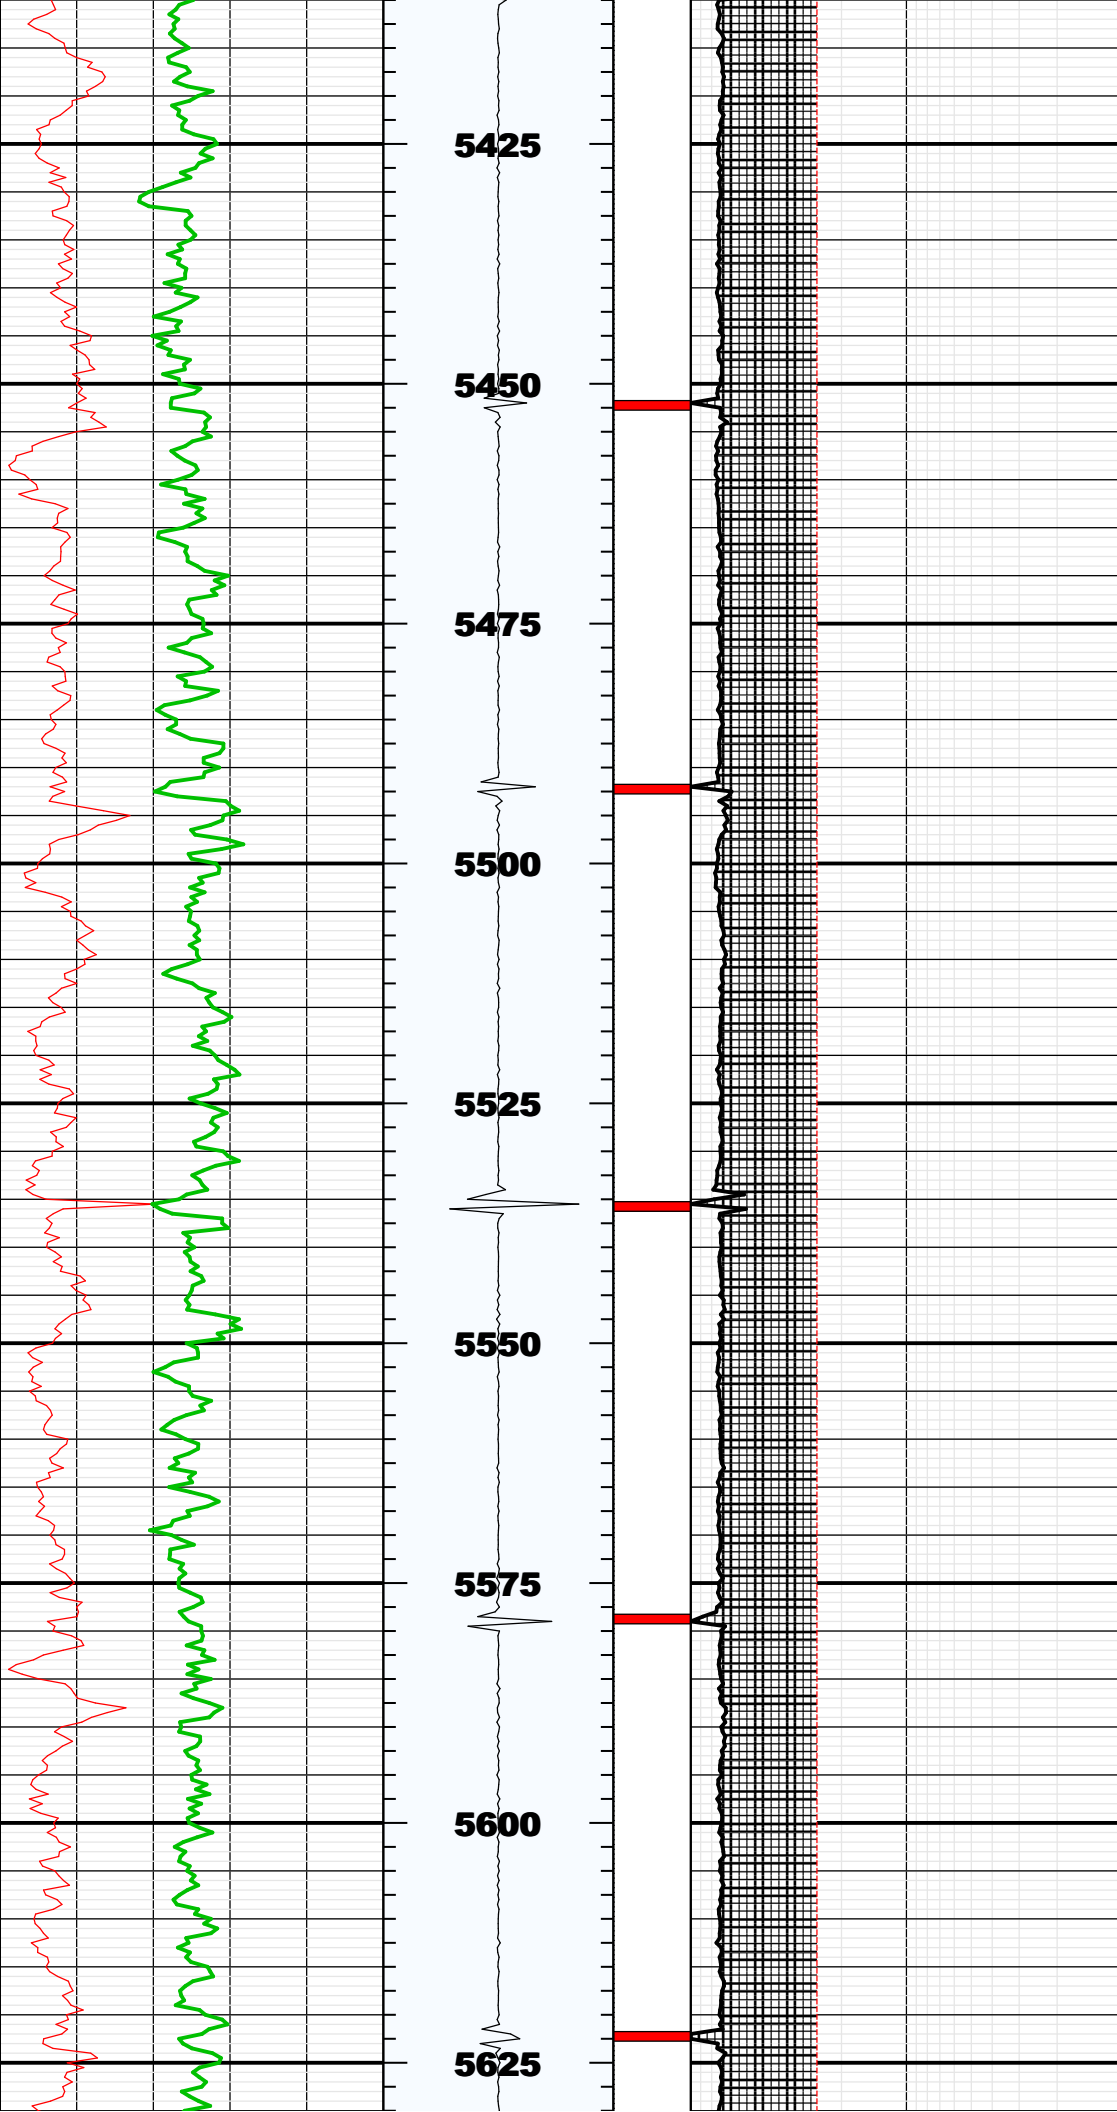


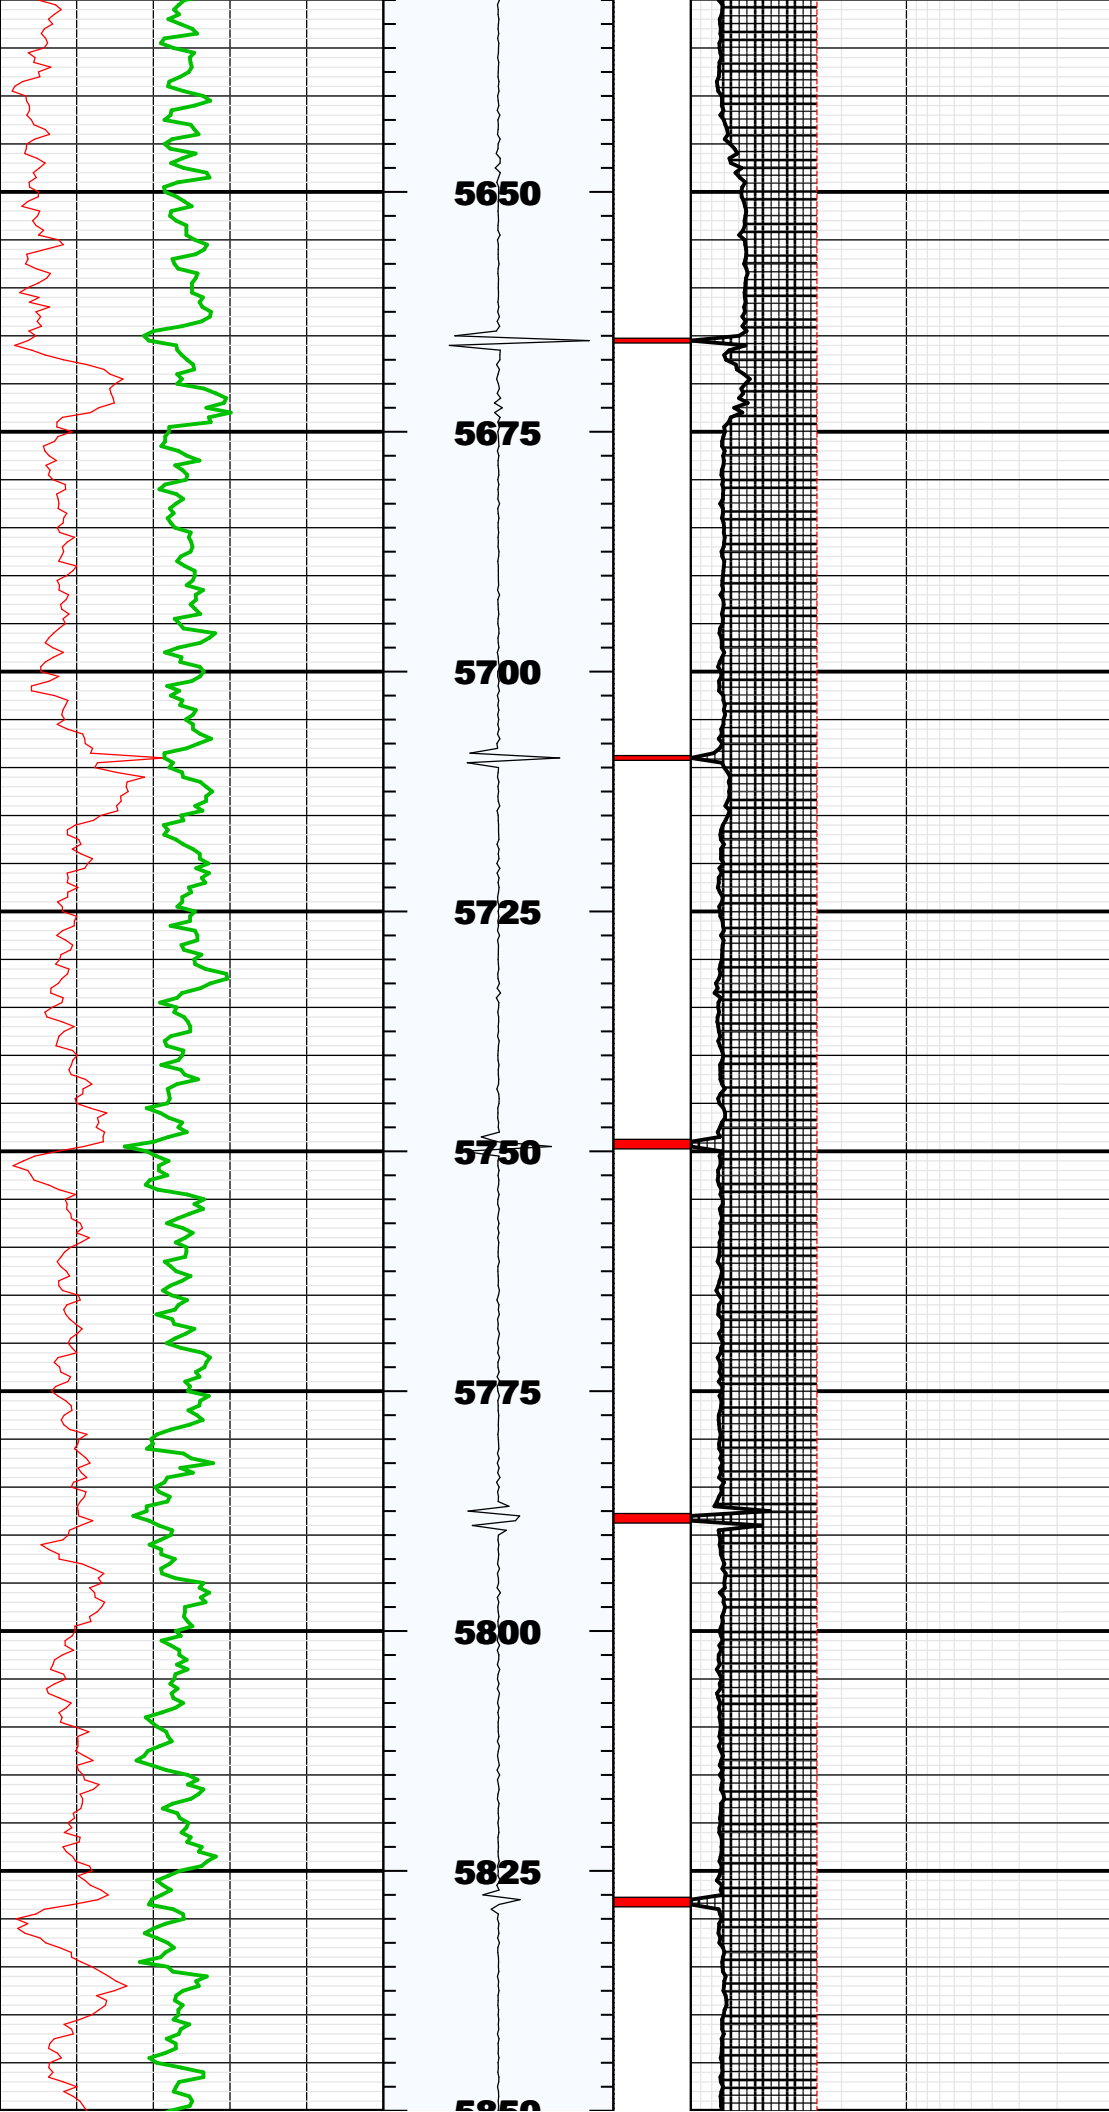


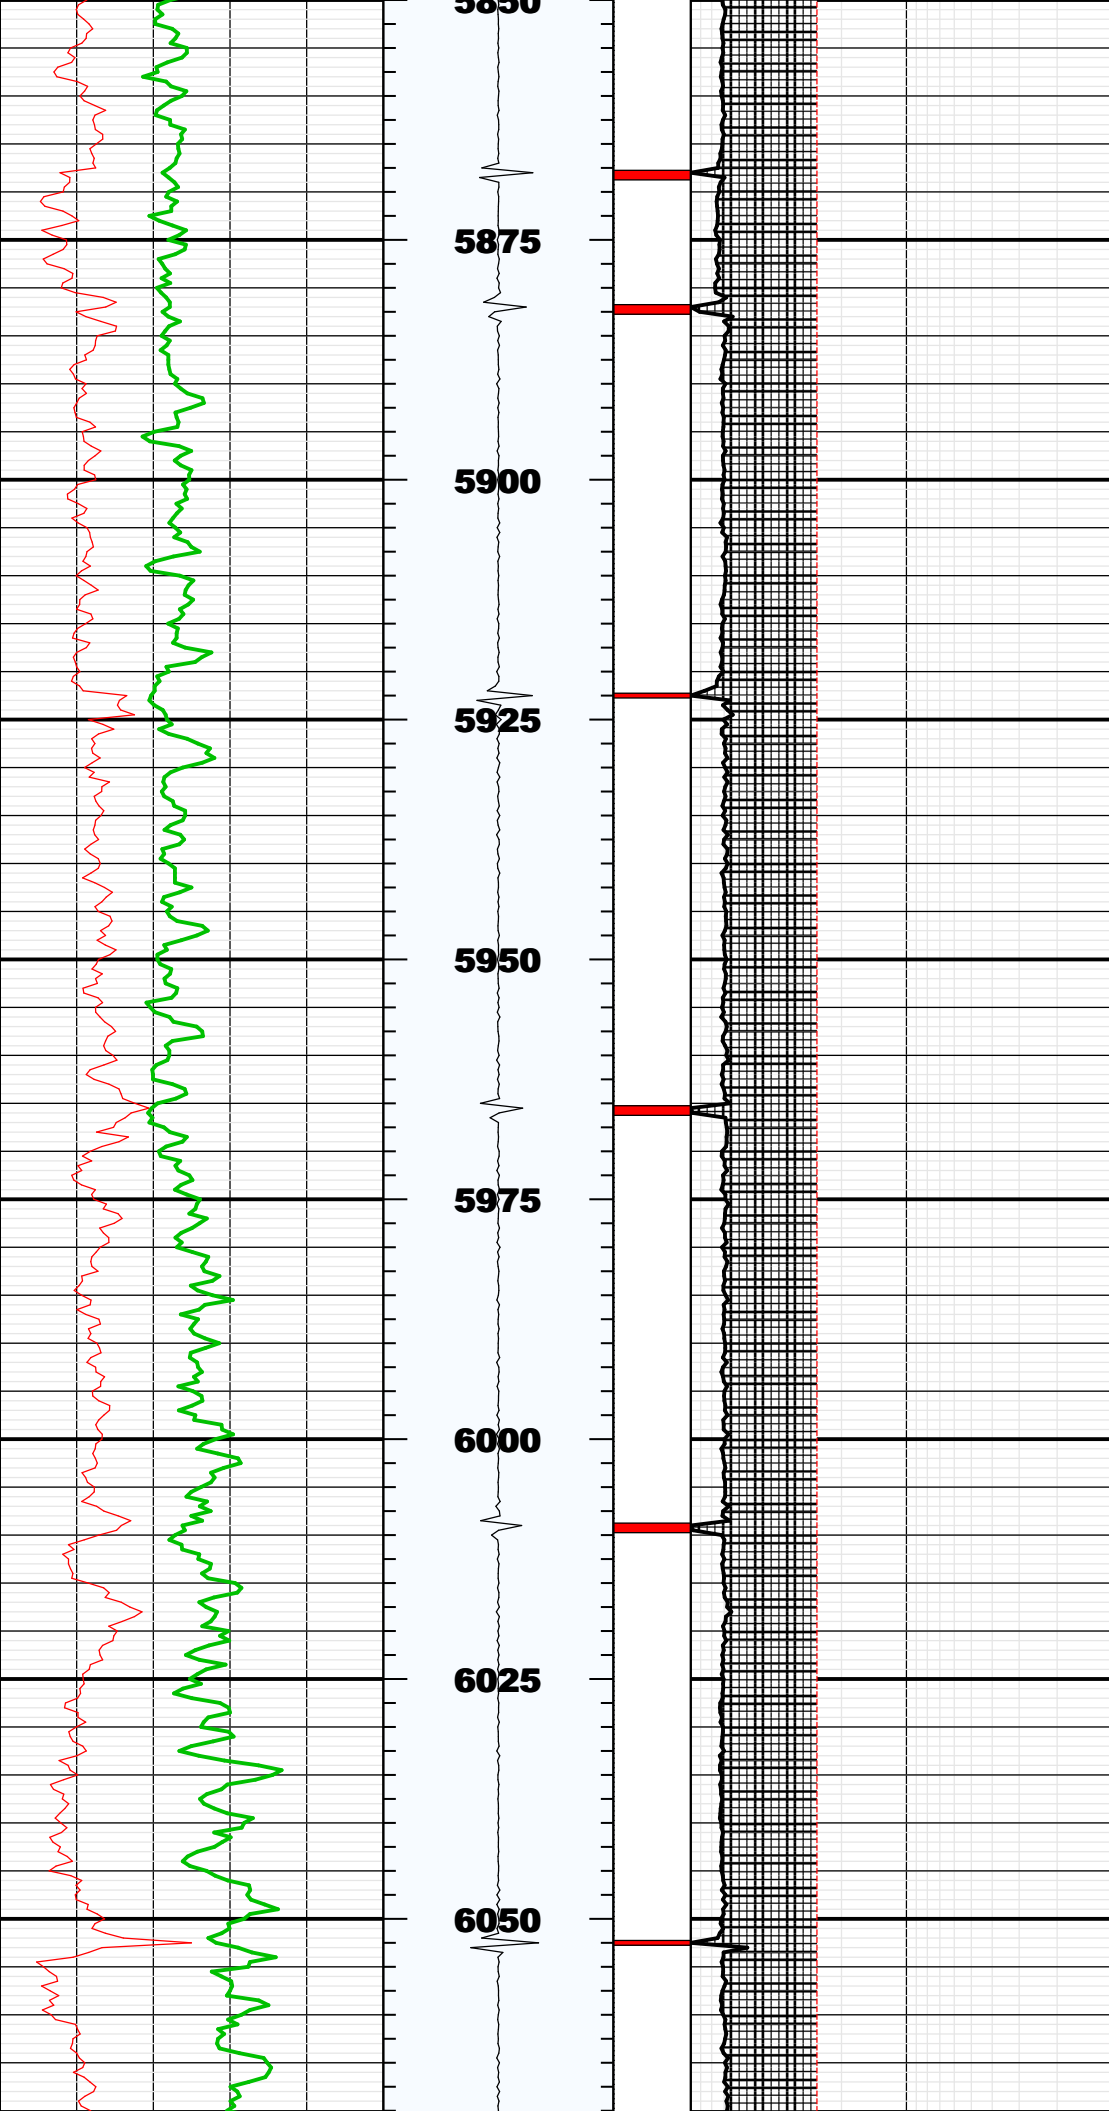

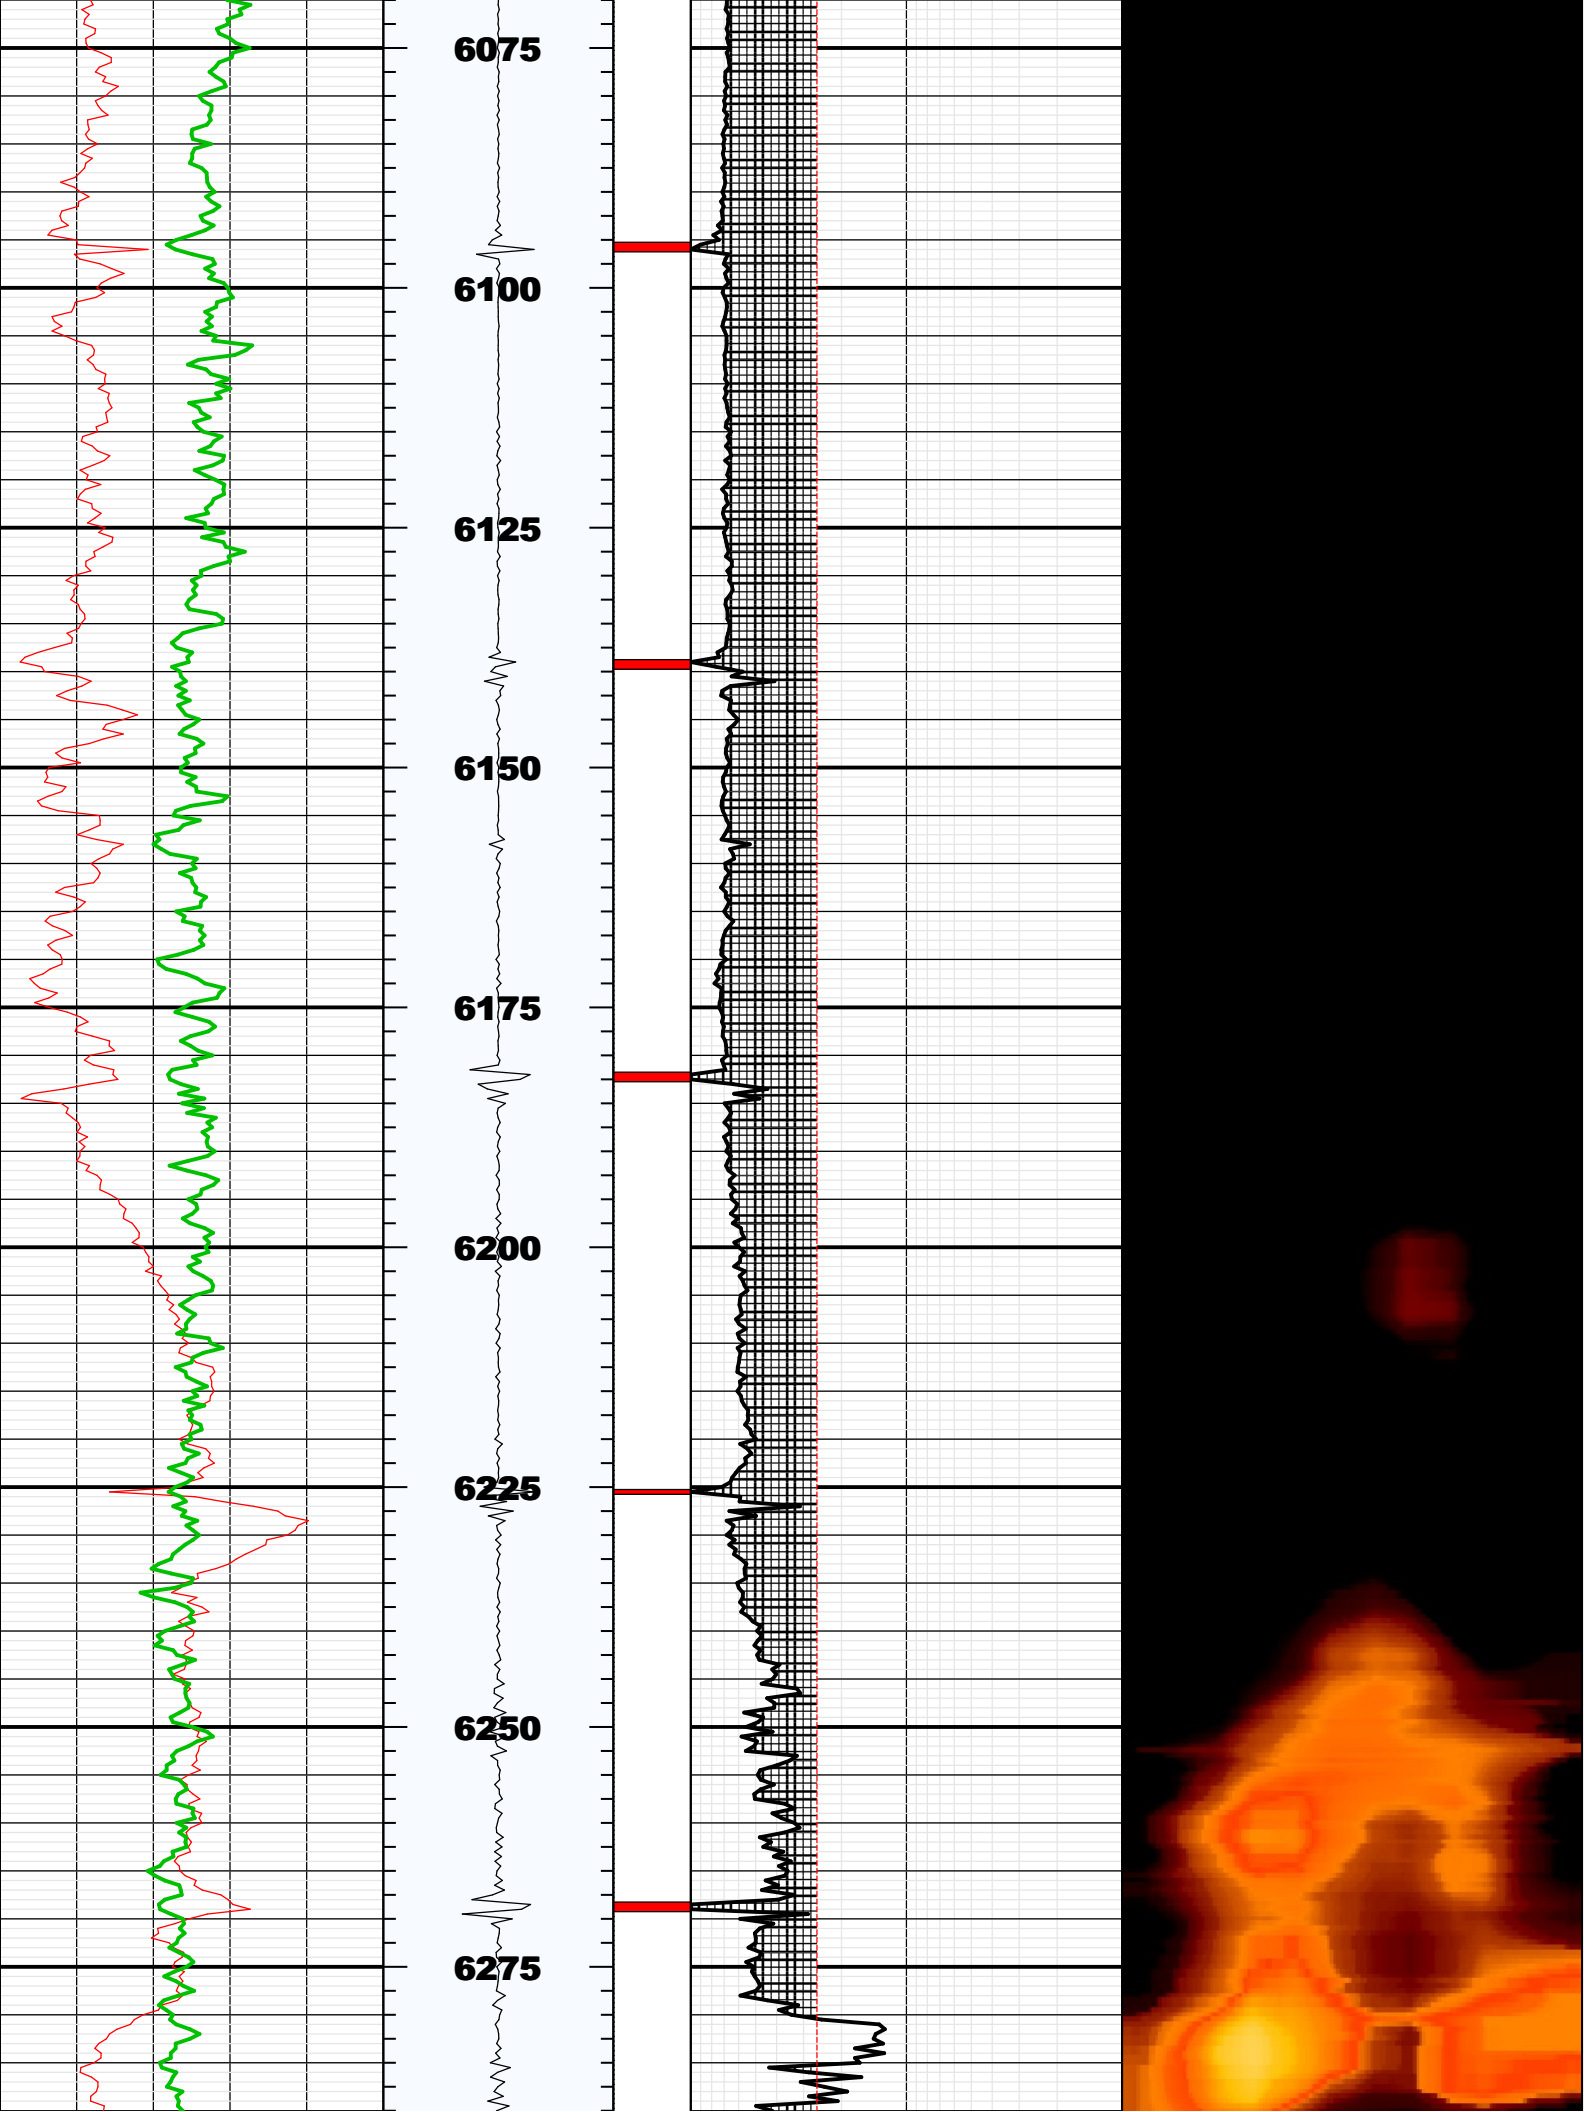

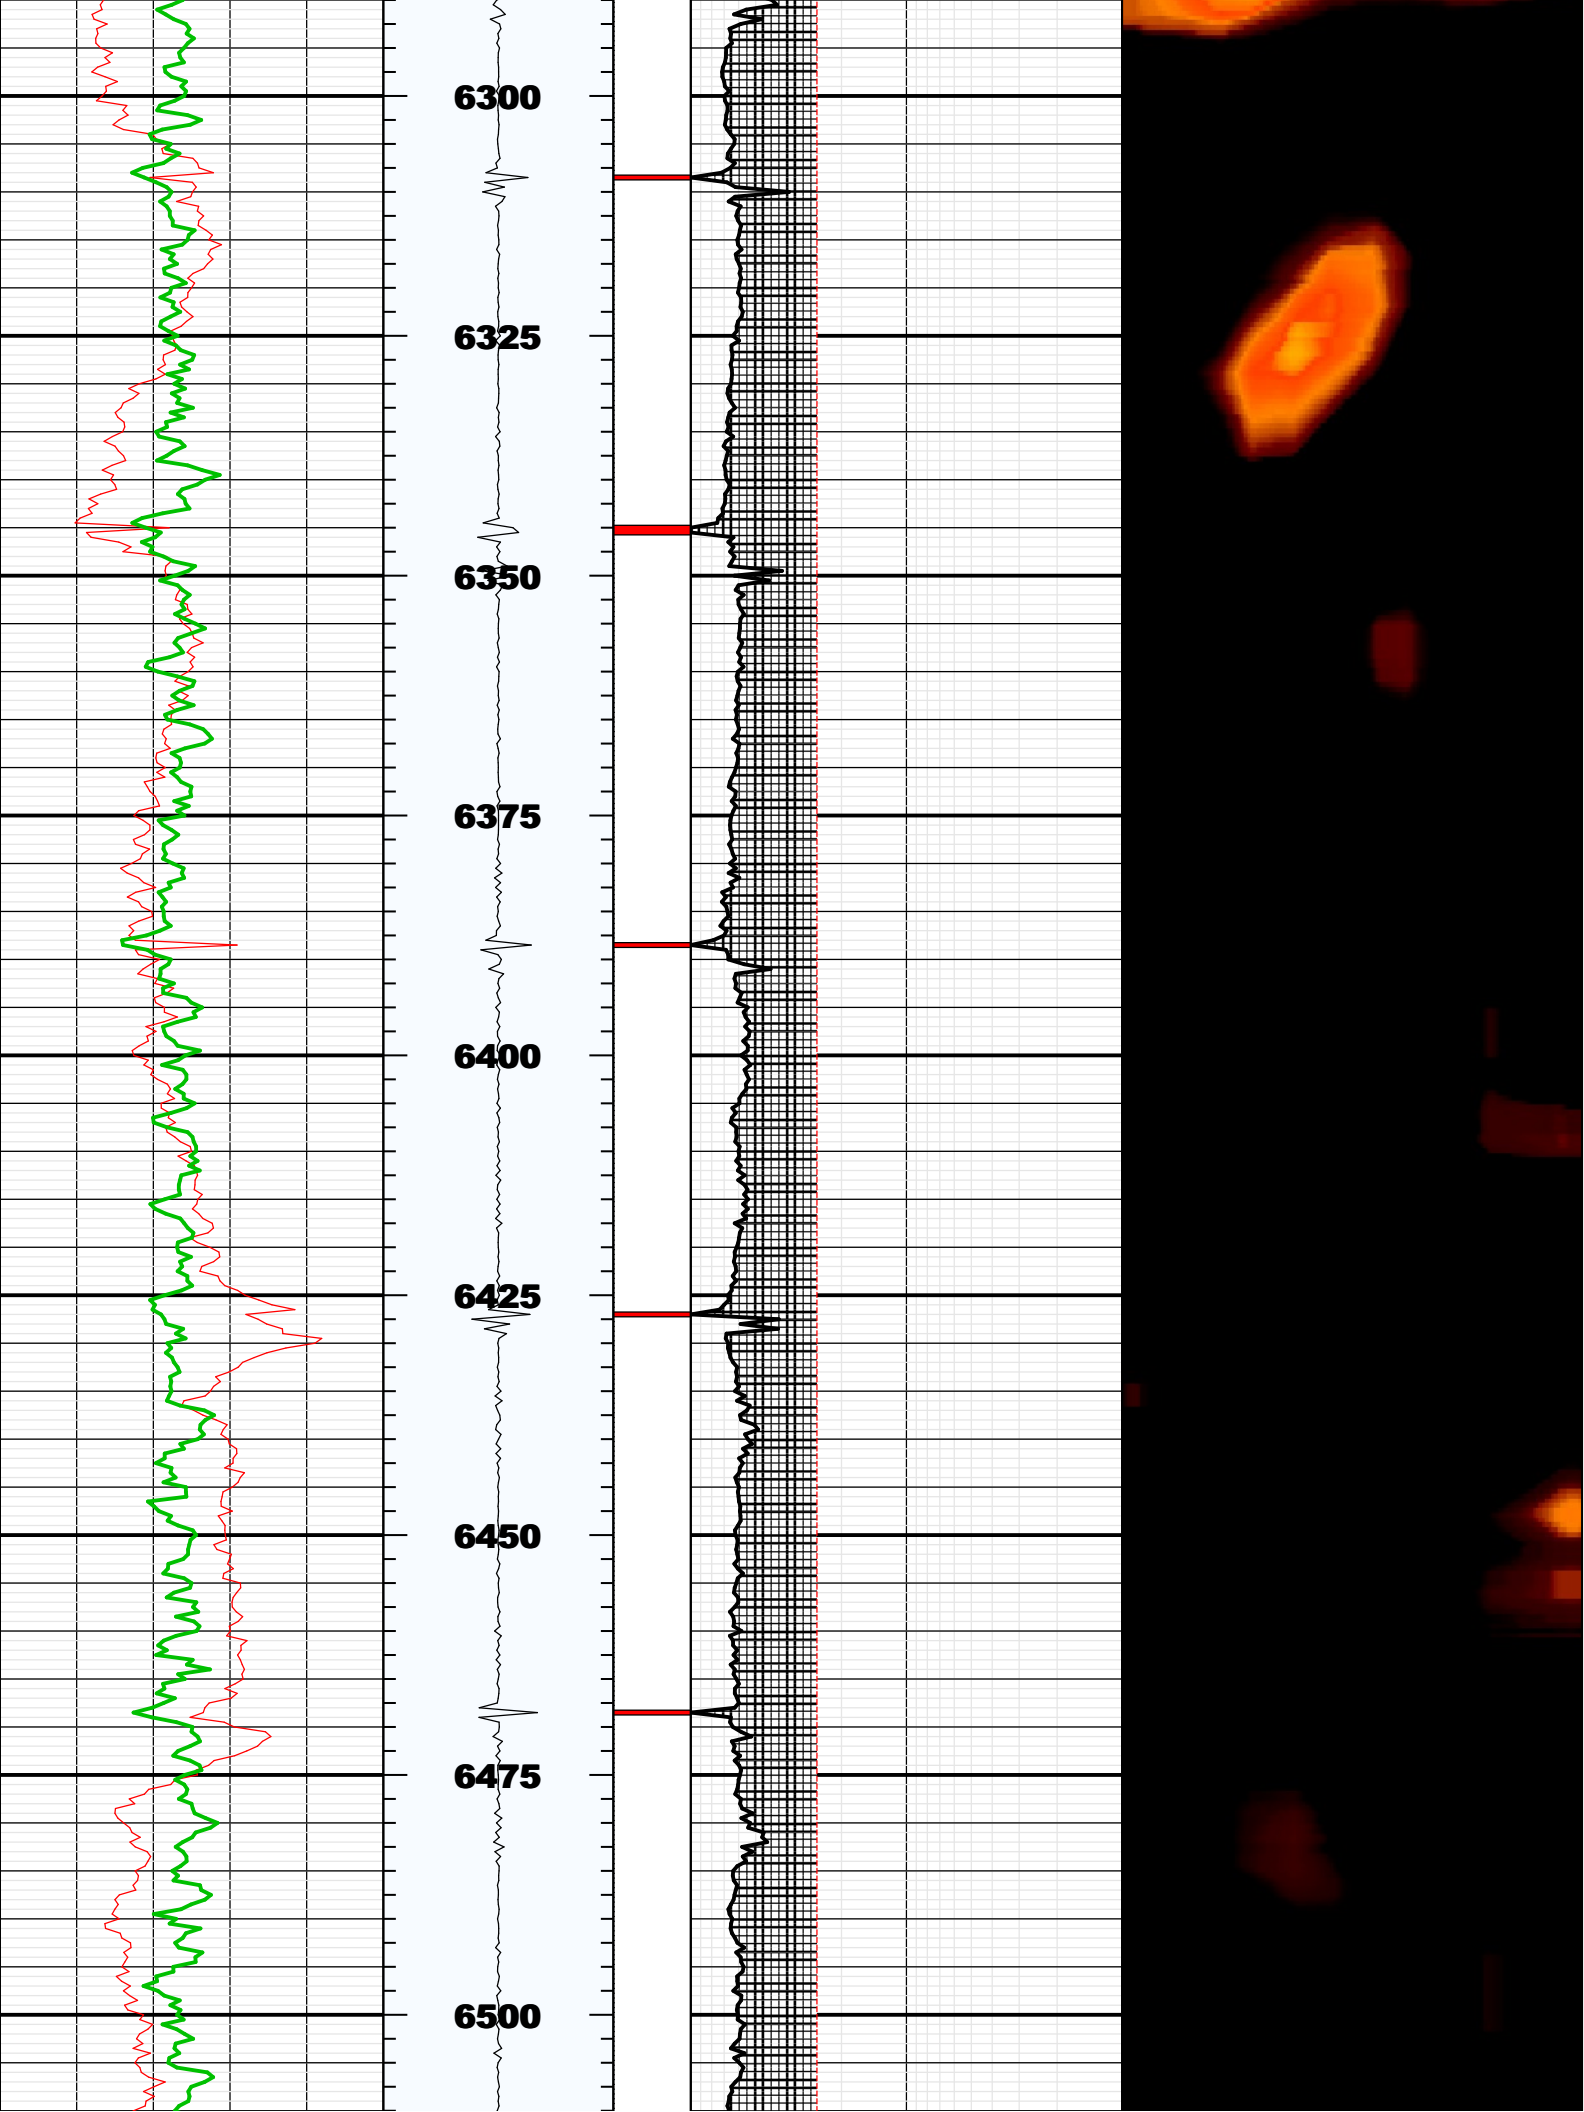

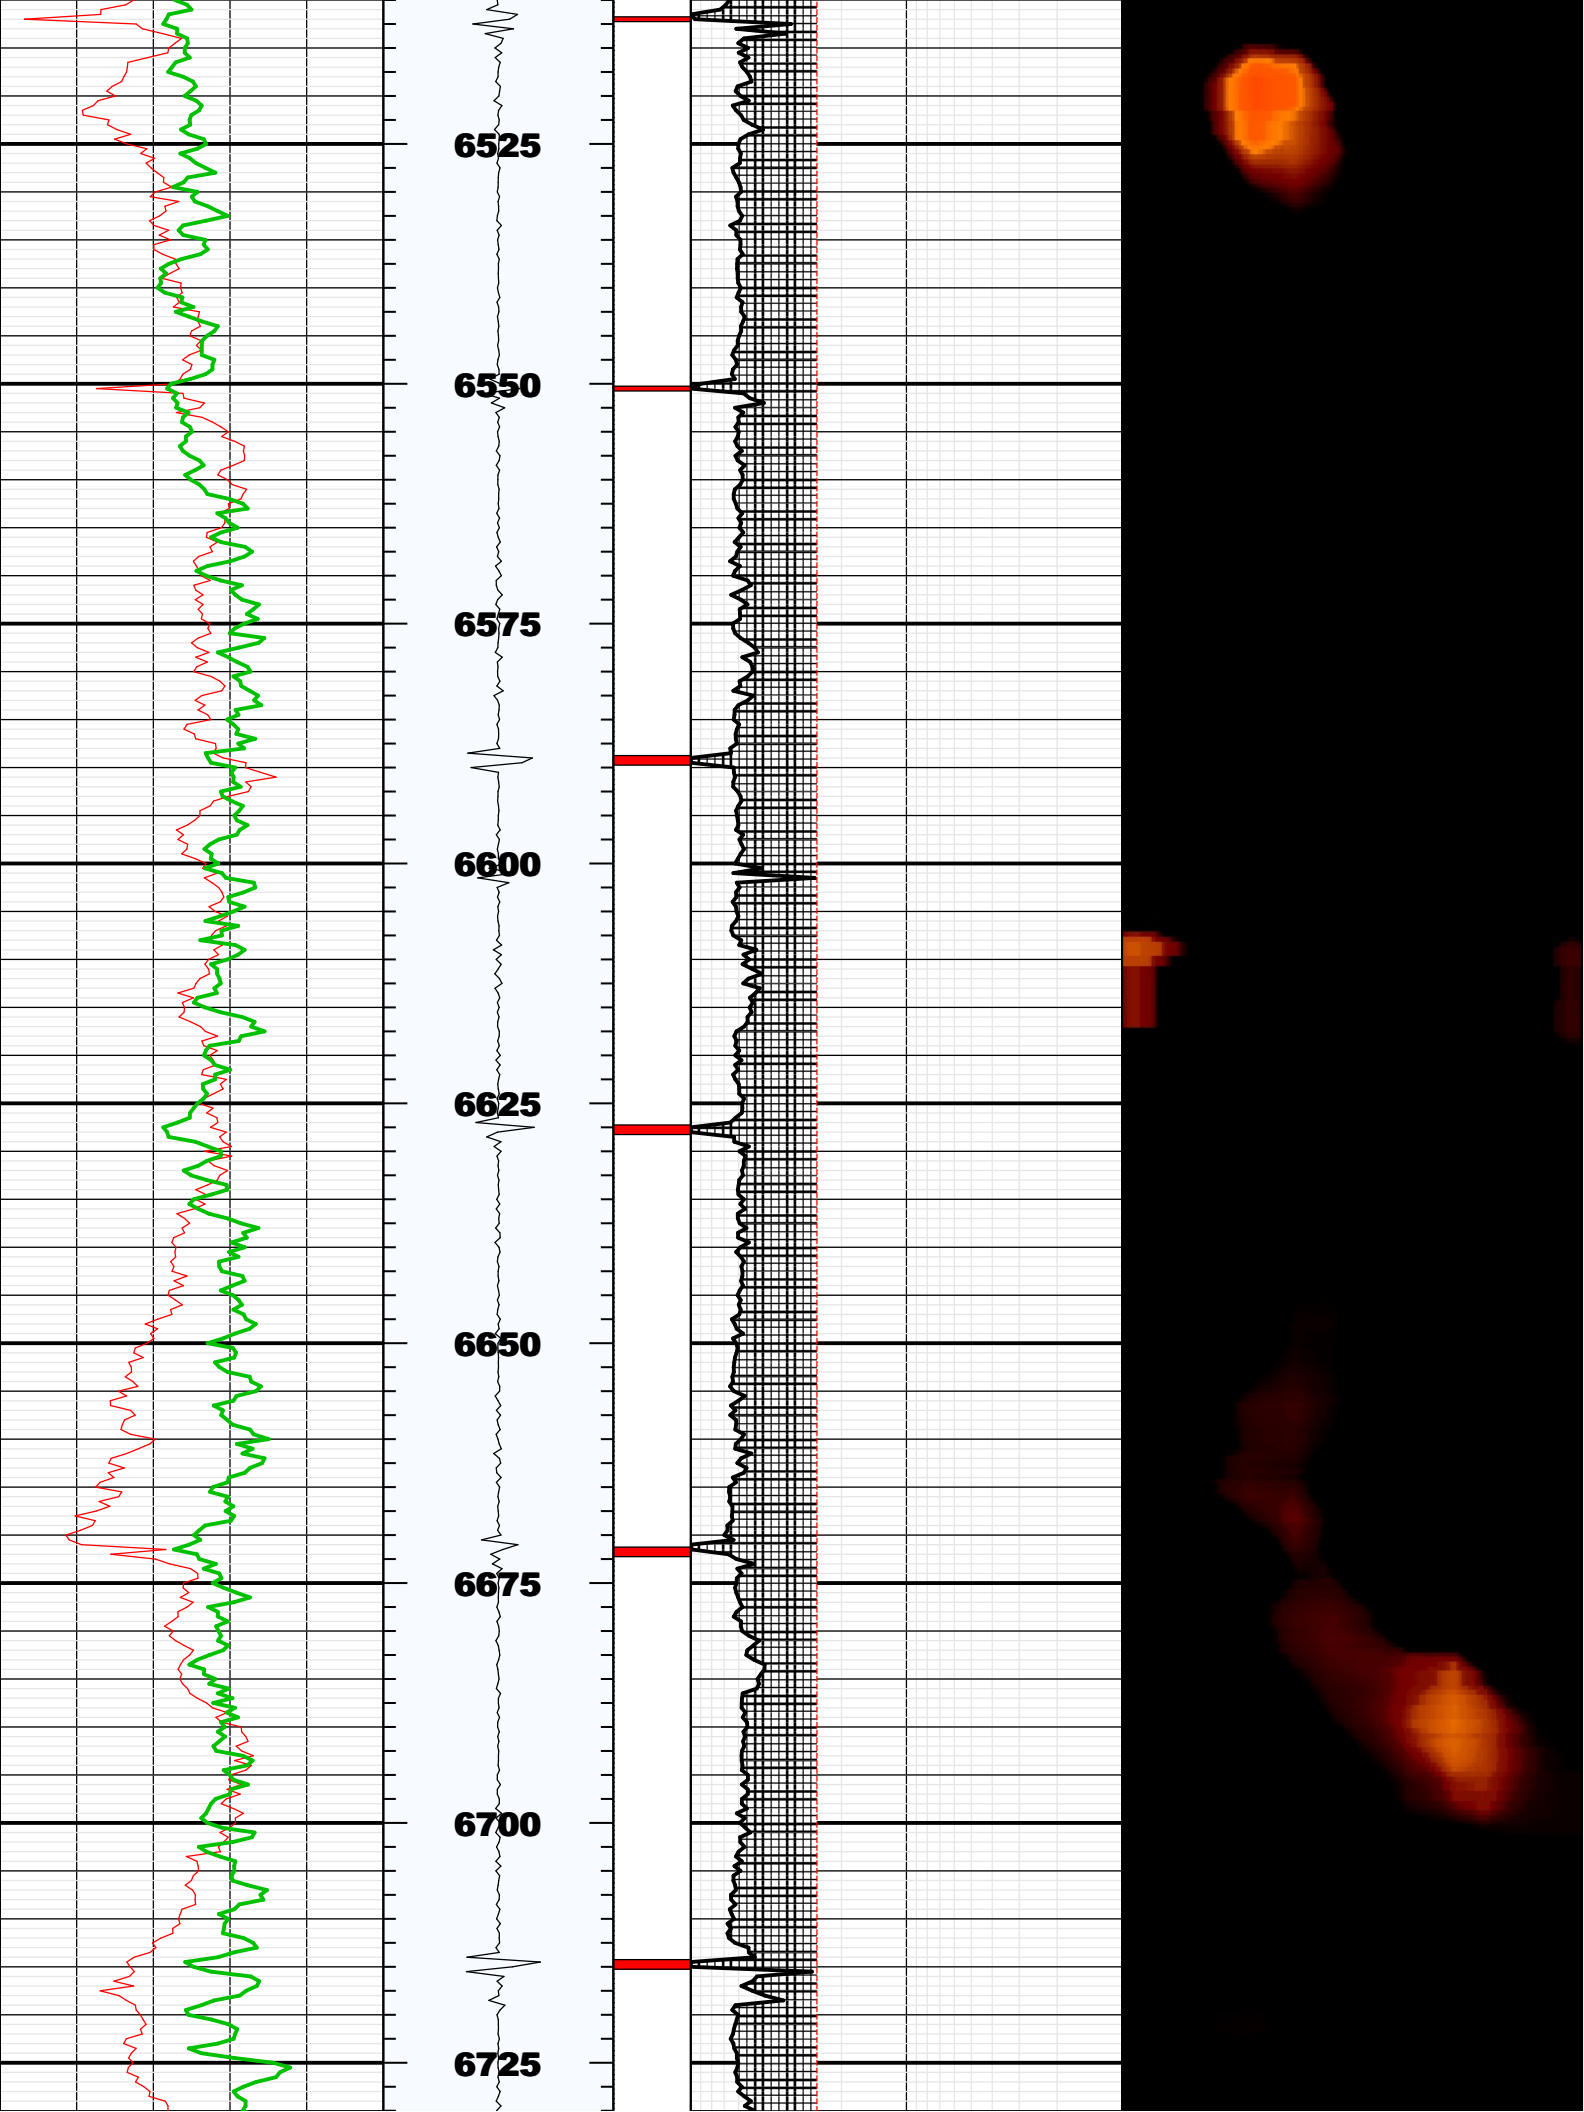


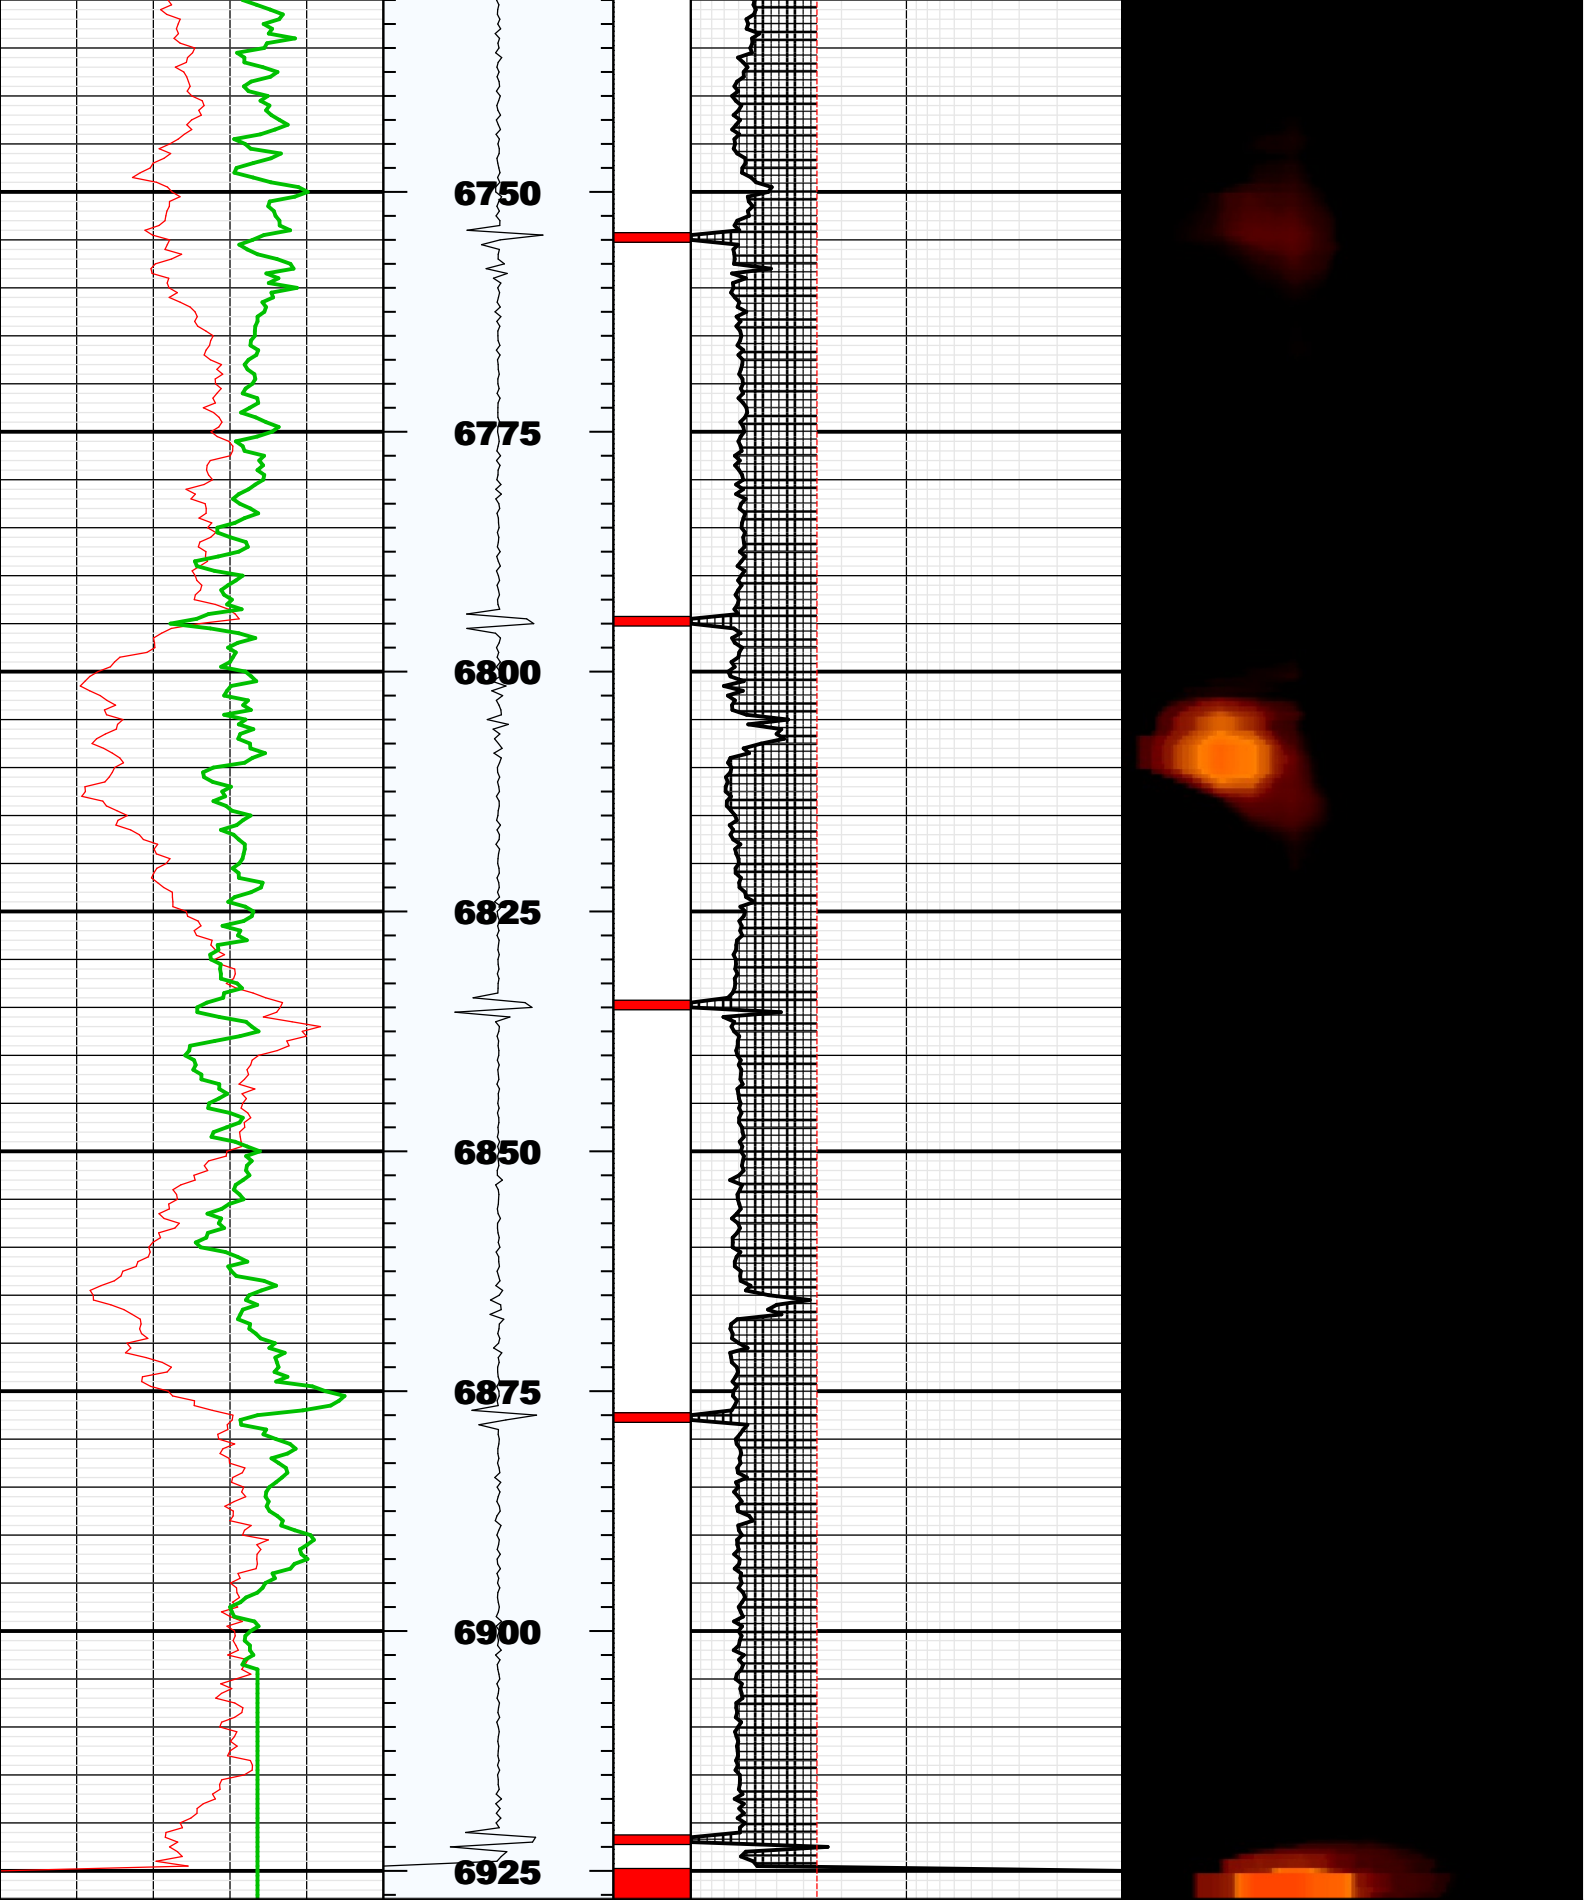



BS	8.75000	IN	Bit Size
CASG	P110		Casing Grade
CDIA	7.00000	IN	Casing Outer Diameter
CSID			
CSIZ	7.00000	IN	Current Casing Size
CWEI	26.00000	LB/F	Casing Weight
DFD	8.40000	LB/G	Drilling Fluid Density
DFVL	188.00000	US/F	Default Fluid Velocity
DO			
DOT	2.87400	IN	Diameter of Transducer Sensor
EMXV	50	V	EMEX Voltage
FDII	0.00000	F	FPM Data Interpolation Interval
FSOD	0_OFF		Fluid Slowness Fits Casing Outer Diameter
LOGMODE			
PP			
STEP	-0.5	F	STEP
THDH	130.00000	%	Maximum Search Thickness (percentage of nominal)
THDL	70.00000	%	Minimum Search Thickness (percentage of nominal)
THDP	Fundamental		Thickness Detection Policy
THNO	0.36200	IN	Nominal Thickness of Casing
TMUC	WRM		Type of Mud
U-USIT_DT3P			
UPAT	375K		Emission Pattern
USUB	7INC		USIT Sub Identifier
UWKM	D603010L		Working Mode
VCAS	51.40000	US/F	Ultrasonic Transversal Velocity in Casing
WINB	39.24762	US	Window Begin Time
WINE	74.31277	US	Window End Time
ZCAS	46.25000	MRAY	Acoustic Impedance of Casing
ZINI	-1.00000	MRAY	Initial Estimate of Cement Impedance
ZMUD	1.81000	MRAY	Acoustic Impedance of Mud
ZTCM	2.60000	MRAY	Acoustic Impedance Threshold for Cement
ZTGS	0.30000	MRAY	Acoustic Impedance Threshold for Gas
WLEN	22.50350	US	T^3 Processing Length


Repeat Pass

Company: Noble Energy Inc
Well: Oscar Y10-74HN
Field: Wattenberg

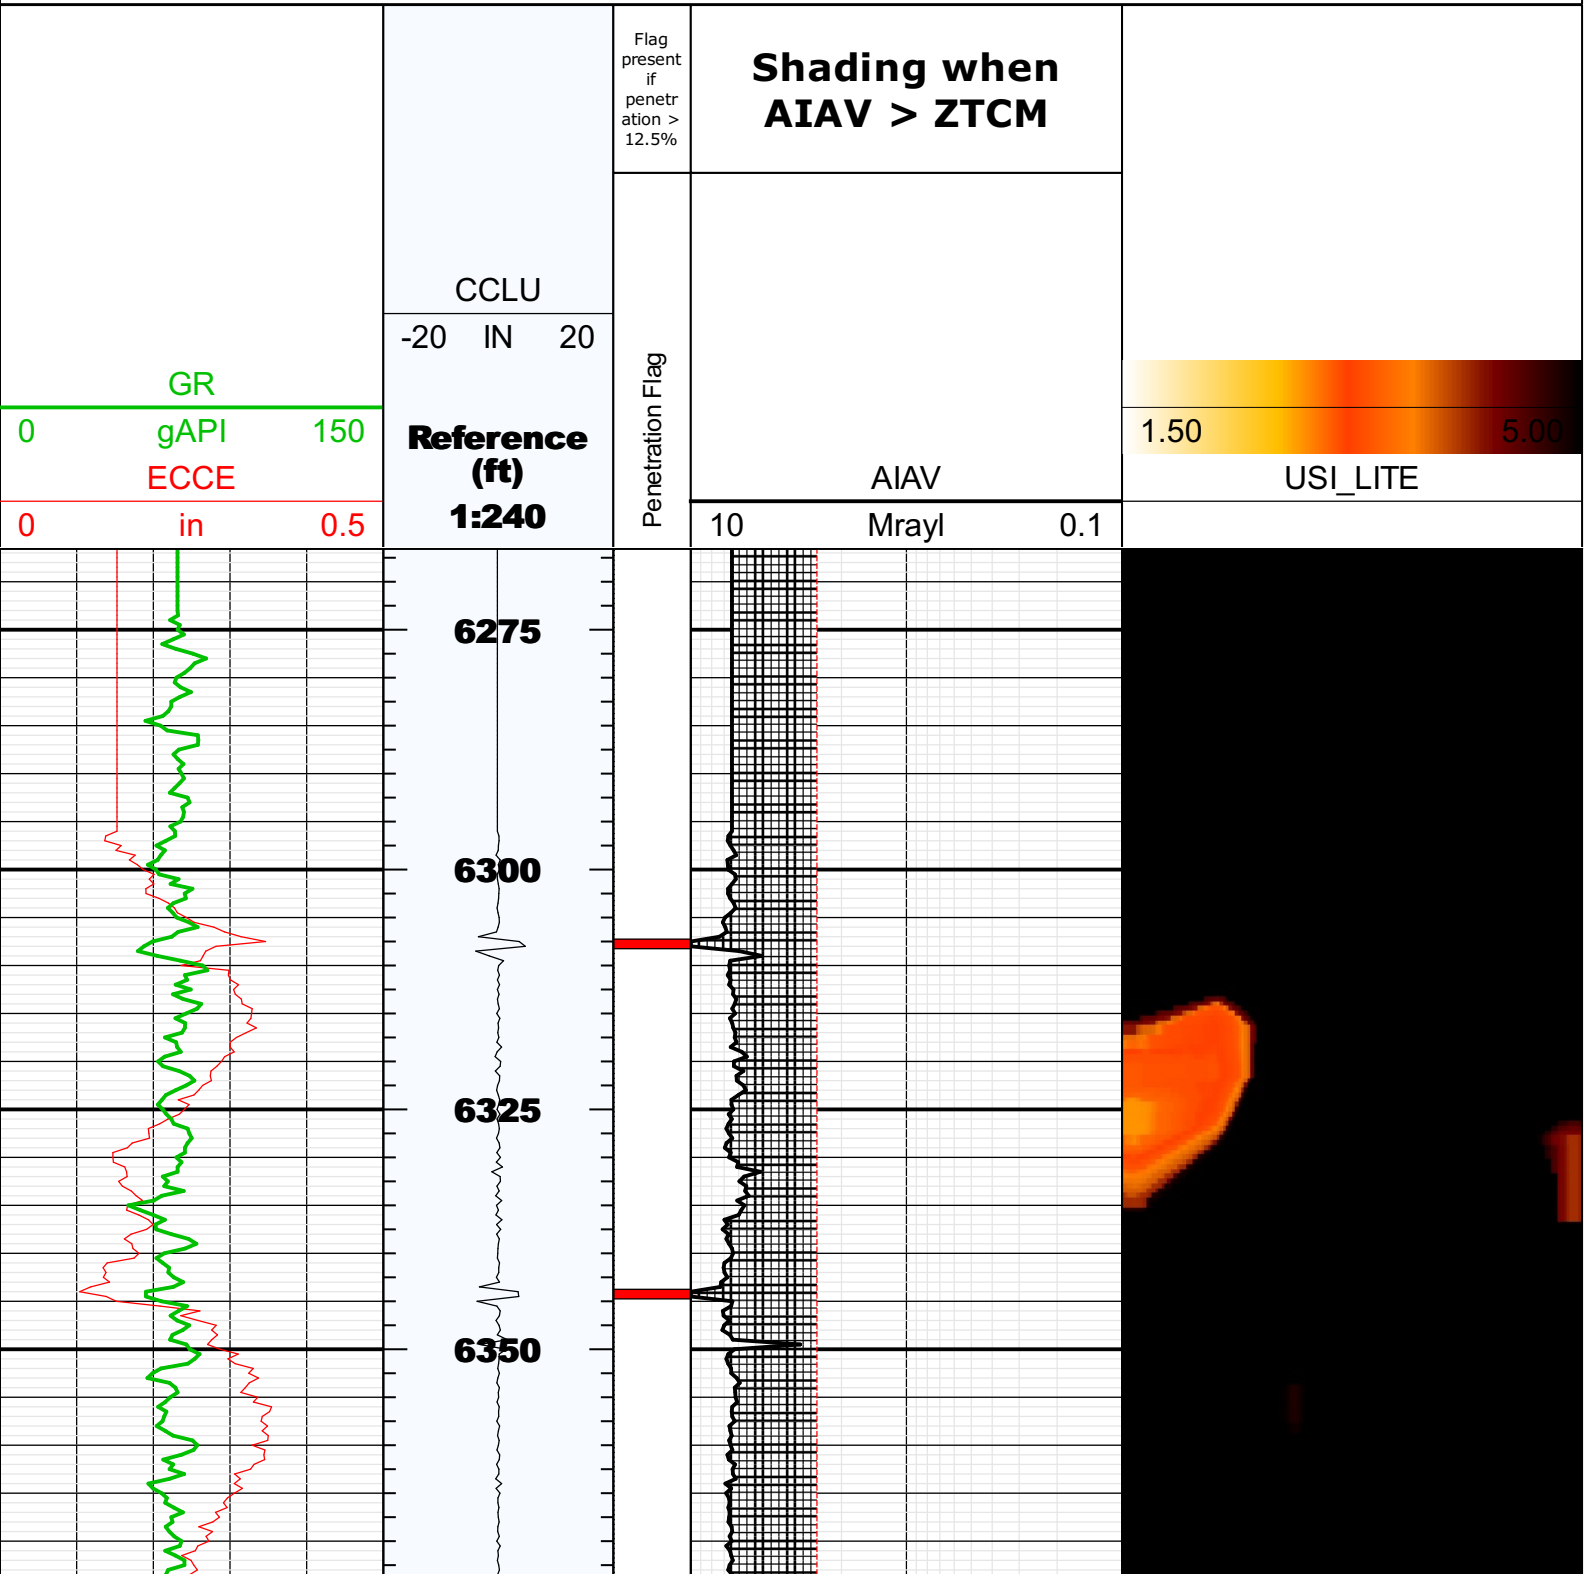

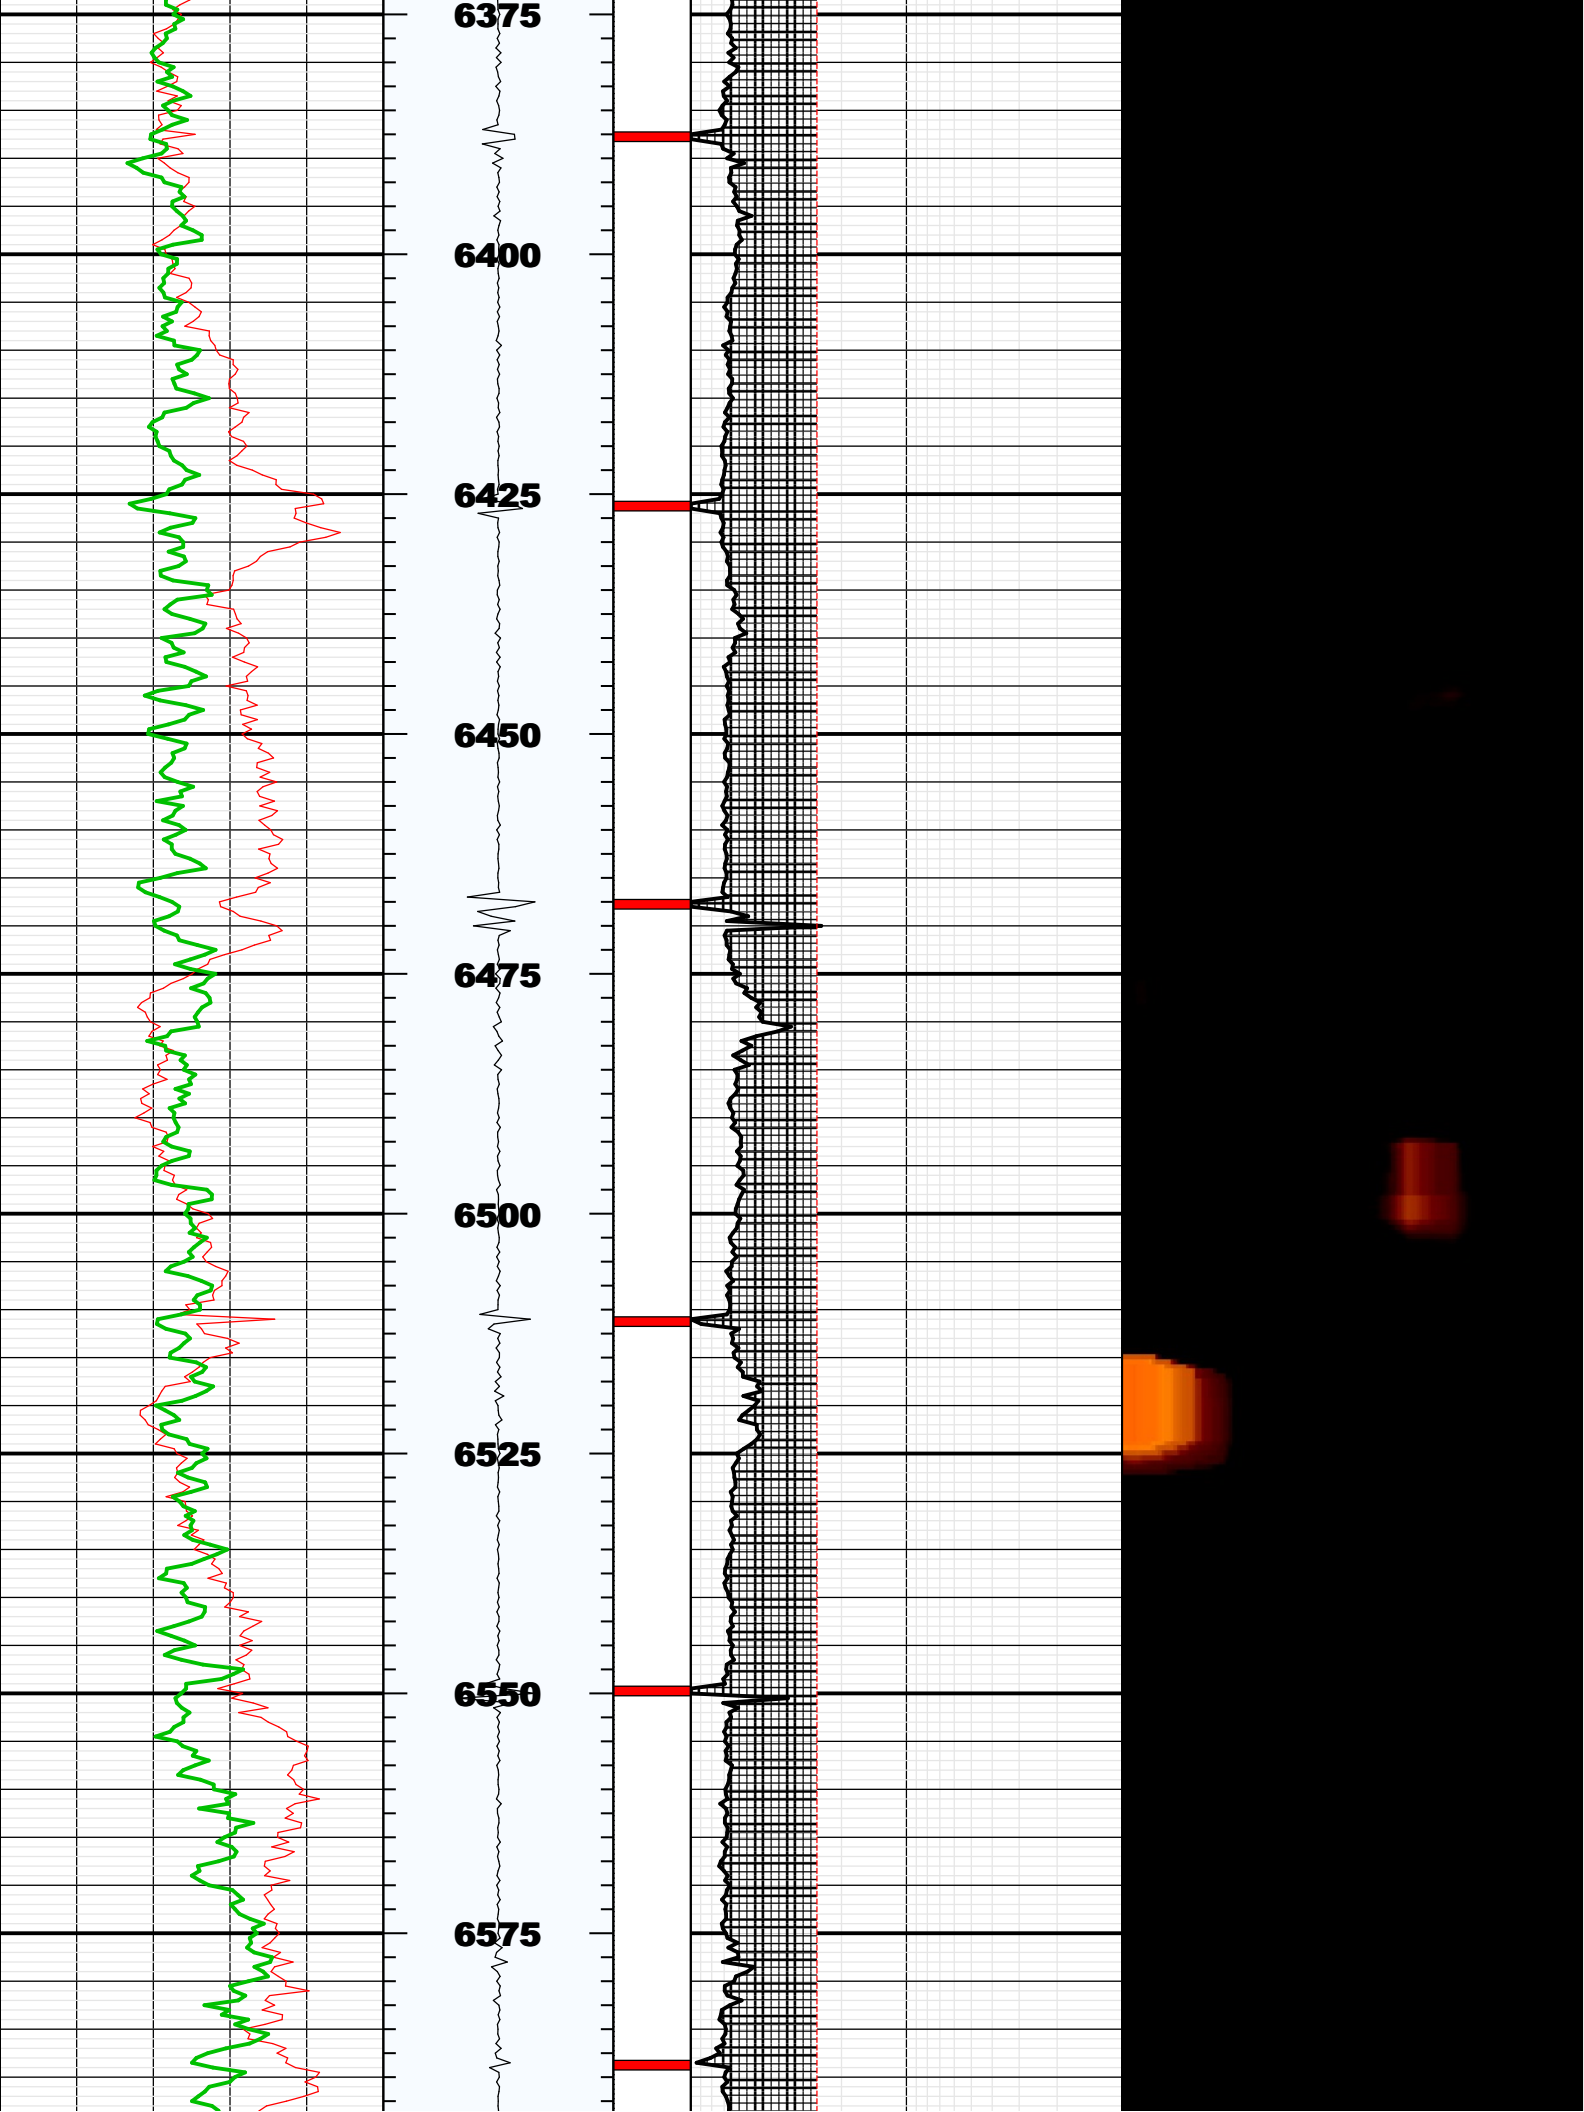

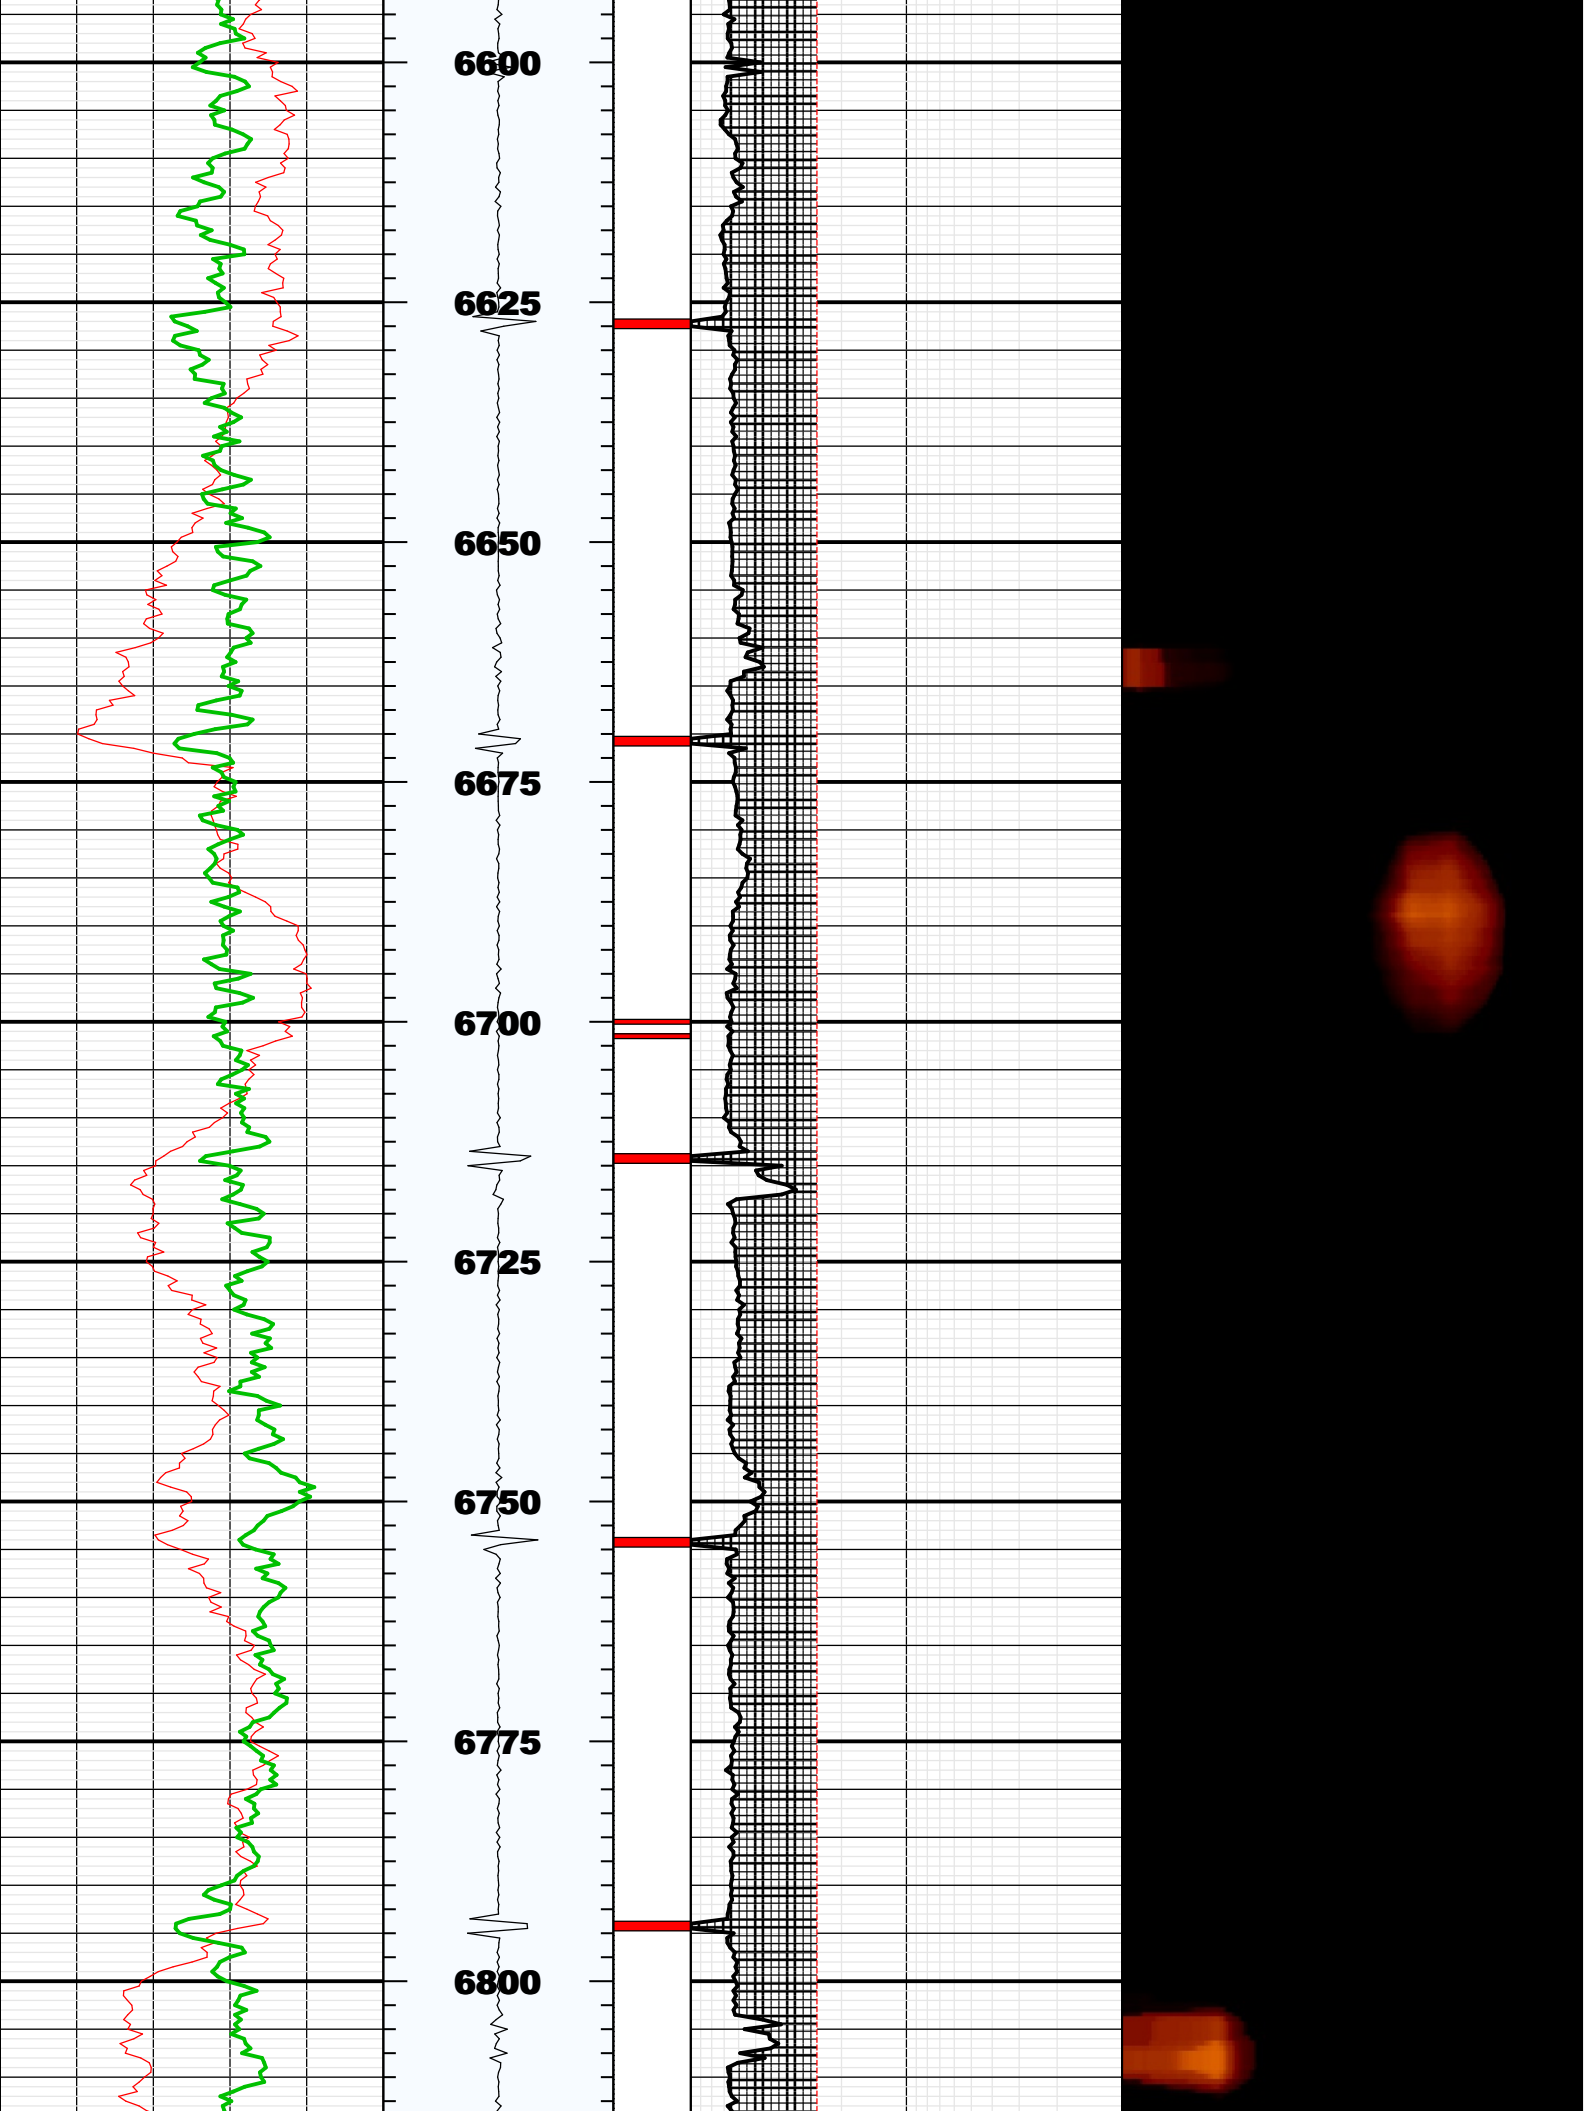

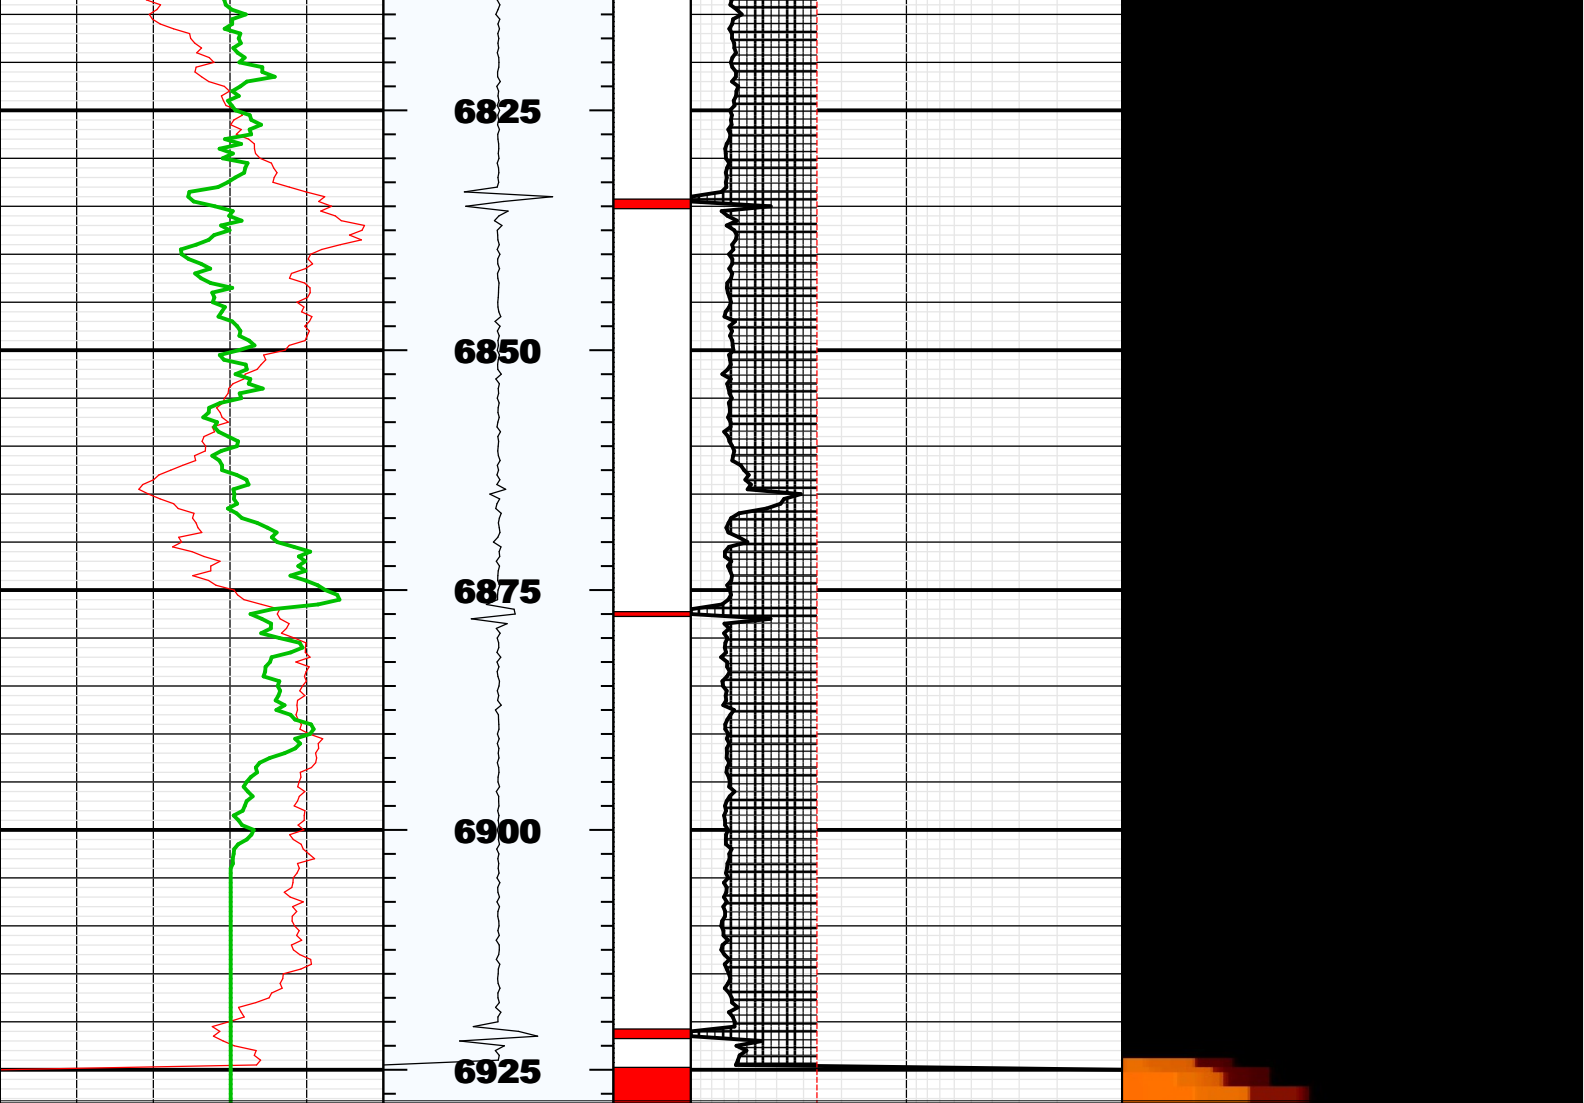

Fluid Properties Used for Main Pass

