

NOBLE ENERGY INC.
 KOHLHOFF USX AB17-16
 SESE 17-7N-64W
 662' FSL & 662' FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/13/2015

API: 05-123-26090
 COGCC #


GL Elev: 4,912'
 KB Elev: 4,924'

Spud Date: 8/9/2007

Surface Casing :
 8-5/8" 24# J-55 @ 722'
 Cement: 320 sxs
 TOC: Surface

TOC @ 1,752'

Production Casing :
 4-1/2" 11.6# M-80 @ 7,316'
 Cement: 970 sxs
 TD: 8/13/2007

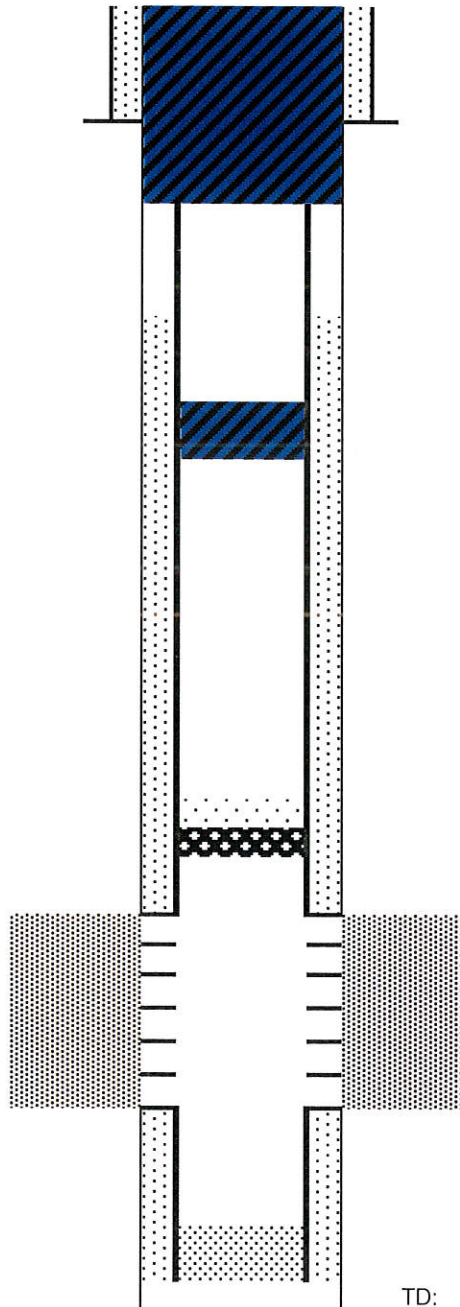

Cut surface casing off 6'-8' below surface.

Pump 280 sx shoe plug @ 900'
 Will bring cement to surface.
 Cut and pull casing @ 900'

Pump 50 sx Balance Plug @ 2500'

CIBP @ 6,764' w/ 2 sx cement on top

Niobrara Perforations:
 6,864' - 6,880';
 6,971' - 6,982'

Codell Perforations: 7,145' - 7,159'

TD: 7,318'