

NOBLE ENERGY INC.
 Huwa 11-2
 SWNE 11-4N-65W
 1960 FSL & 1956 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/14/2015

API: 05-123-14717
 COGCC #

GL Elev: 4,685
 KB Elev: 4,695


Spud Date:

Surface Casing :
 8-5/8", 24 ppf @ 400'
 Cement: 150 sxs
 TOC: Surface

TOC @ 3,774'

Nio Top 6,709'

Production Casing :
 4-1/2", 12.60 ppf, N-80 @ 7,119'
 Cement: 670 sxs
 TD: 9/9/1990

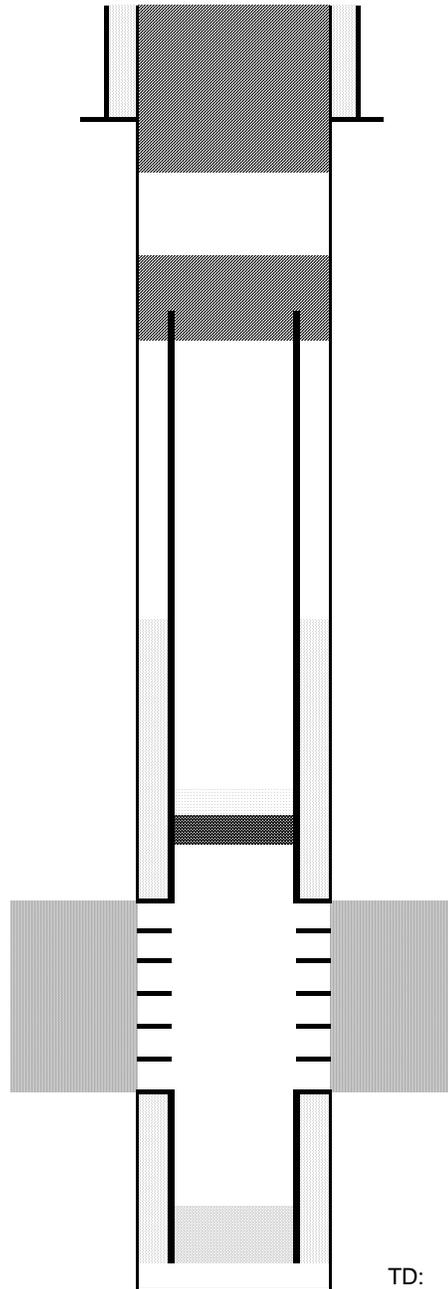

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 520'
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6,660' w/ 2 sx cement on top

Niobrara Perforations 6,710 - 6,903'

Codell Perforations 7,009 - 7,024'

TD: 7,119