

NOBLE ENERGY INC.
 ODLE BB18-13
 SWSW 18-5N-63W
 646 FSL & 639 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/15/2015

API: 05-123-15528
 COGCC #

GL Elev: 4561
 KB Elev: 4573


Spud Date:

Surface Casing :
 8-5/8" 24# @ 314'
 Cement: 130
 TOC: Surface

TOC @ 5694'

Nio Top 6266'

Production Casing :
 2-7/8" 6.5# N-80 @ 6756'
 Cement: TOC @ 5694'
 TD: 2/5/1992

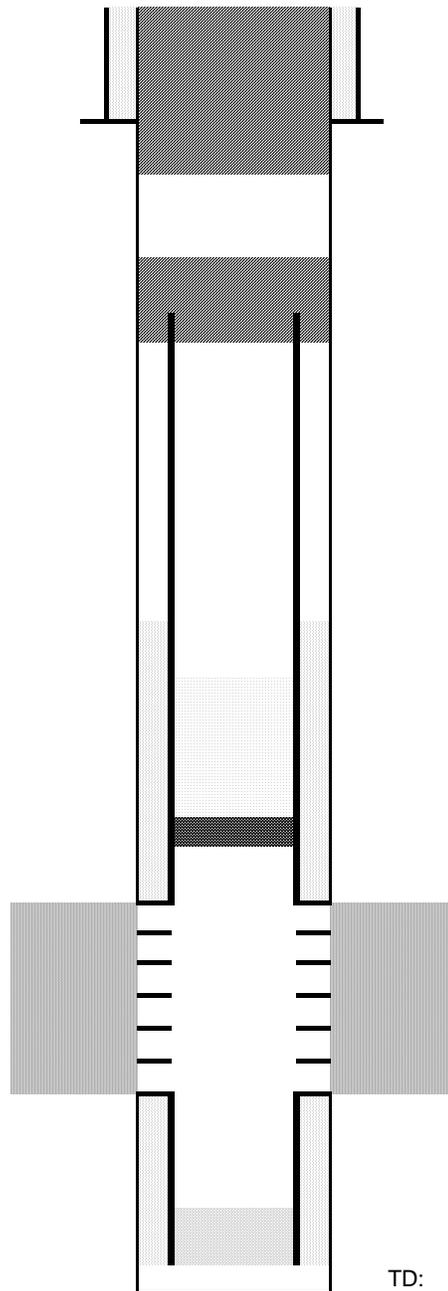

Cut surface casing off 6'-8' below surface.

Pump approx 140 sx shoe plug @ 416'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6551' w/ 15 sx cement on top

Codell Perforations (6601-6613')

TD: 6756