

NOBLE ENERGY INC.
NAKAGAWA PMB13-09
NESE 13-5N-64W
2005' FSL & 575' FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/17/2015

API: 05-123-15079
 COGCC #

GL Elev: 4567'
 KB Elev: 4577'

Spud Date: 7/8/1991

Surface Casing :
 8 5/8" 24# @ 311'
 Cement: 250 sx
 TOC: Surface


Casing Repair Cement from 4496' to Surface

NEED CBL TO CONFIRM DEPTHS
 Casing Repair Cement from 5429' - 5774' (calc'd)
 Casing Patch @ 5675'

TOC @ 5800'

Nio Top @ 6358'

Production Casing :
 2 7/8" 6.5# @ 6758'
 Cement: 300 sx + 150 sx + 543 sx
 TD: 1/2/1997

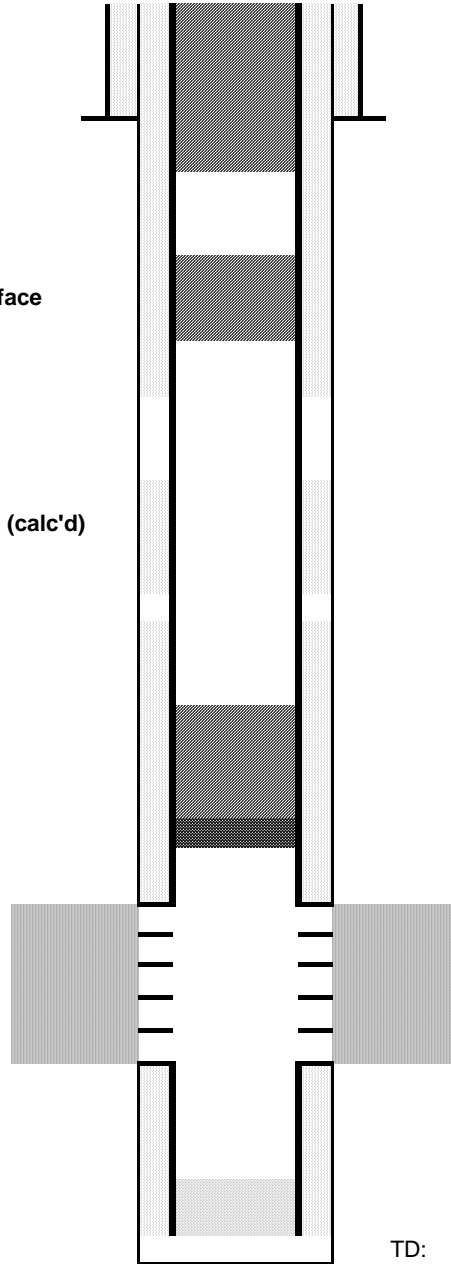

Cut surface casing off 6'-8' below surface.

Pump approx 15 sx shoe plug @ 450'
 Will bring cement to surface.

Pump 10 sx Courtesy Plug @ 2500'

Pump 15 sx Balance Plug @ 6600'

CIBP @ 6600'

Codell Perforations 6650' - 6660'

TD: 6817'