

NOBLE ENERGY INC.
DKW GREEN STATE BB18-07
SWNE 18-5N-63W
1865' FNL & 1962' FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/20/2015

API: 05-123-19279
COGCC #

GL Elev: 4618'
KB Elev: 4608'

Spud Date: 12/29/1996


Surface Casing :
8 5/8" 23# @ 350'
Cement: 245 sx
TOC: Surface

Casing Repair Cement from 2558' to 3480'

Casing Repair Cement from 5126' to 5235'
Casing Patch @ 5223' (9/28/2005)

TOC @ 5890'

Production Casing :
3 1/2" 7.7# @ 6789'
Cement: 175 sx
TD: 1/2/1997

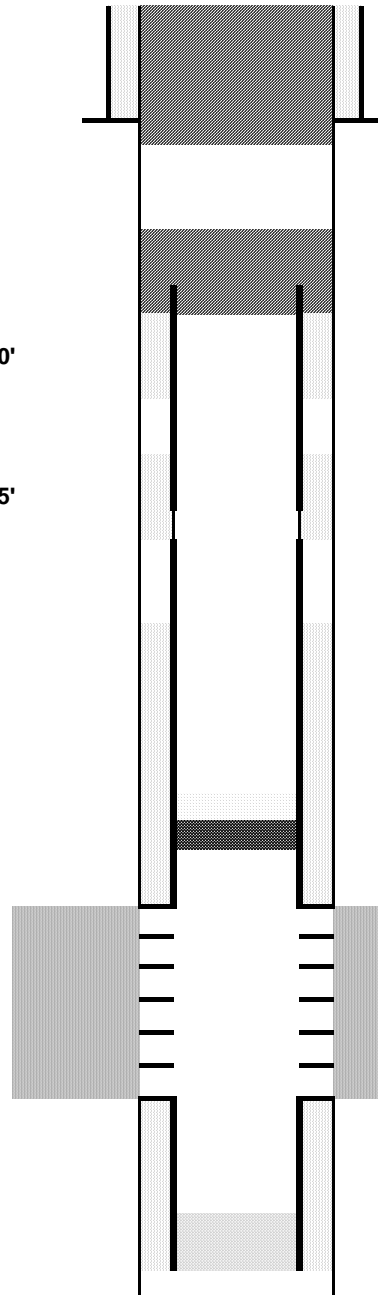

Cut surface casing off 6'-8' below surface.

Pump approx 150 sx shoe plug @ 450'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 6317' w/ 2 sx cement on top

Niobrara Perforations 6367' - 6466'

Codell Perforations 6648' - 6658'

TD: 6815'