

NOBLE ENERGY INC.
 STATE SLW 18-24
 SENW 18-5N-63W
 1922' FNL & 1962' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/20/2015

API: 05-123-22665
 COGCC #


GL Elev: 4596'
 KB Elev: 4606'

Spud Date: 2/2/2005

Surface Casing :
 8 5/8" 24# @ 395'
 Cement: 175 sx
 TOC: Surface

TOC @ 5865'

Production Casing :
 4 1/2" 11.6# @ 6802'
 Cement: 147 sx
 TD: 2/8/2005

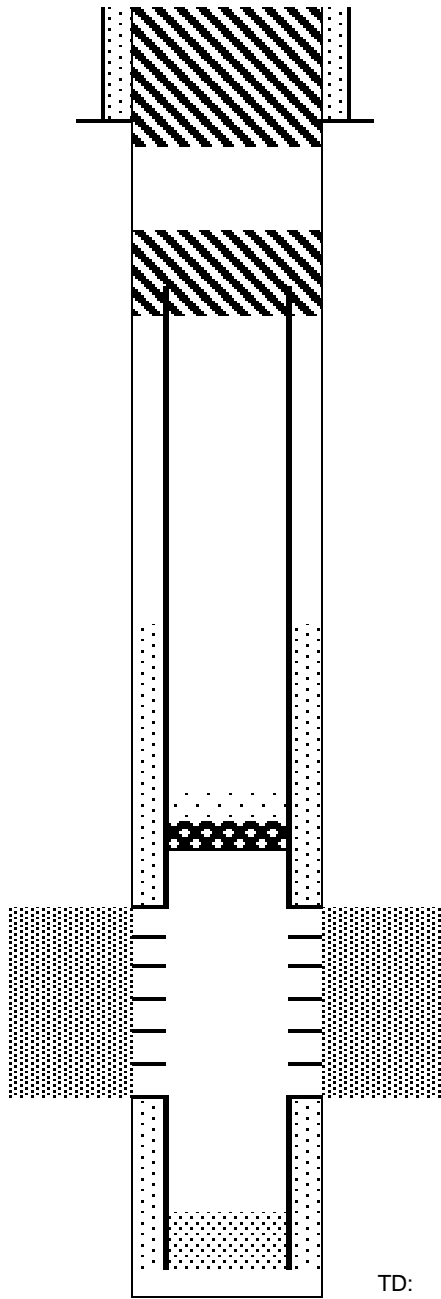

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 500'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6434' w/ 2 sx cement on top

Niobrara Perforations 6484' - 6560'

Codell Perforations 6642' - 6654'

TD: 6811'