

WELLBORE DIAGRAM


Surface Loc: 618' FNL & 476' FEL

Operator:	EnCana Oil & Gas (USA) Inc.
Well Name:	HC Bray 30-21-45-14
Location:	NE NE Sec. 25-T45N-R15W
Field:	Hamilton Creek
County:	San Miguel, CO.
API Number:	05-113-06223-00

Rev 7/21/08 jw

FORMATIONS

Cutler	1727'
Hermosa Group	7185'

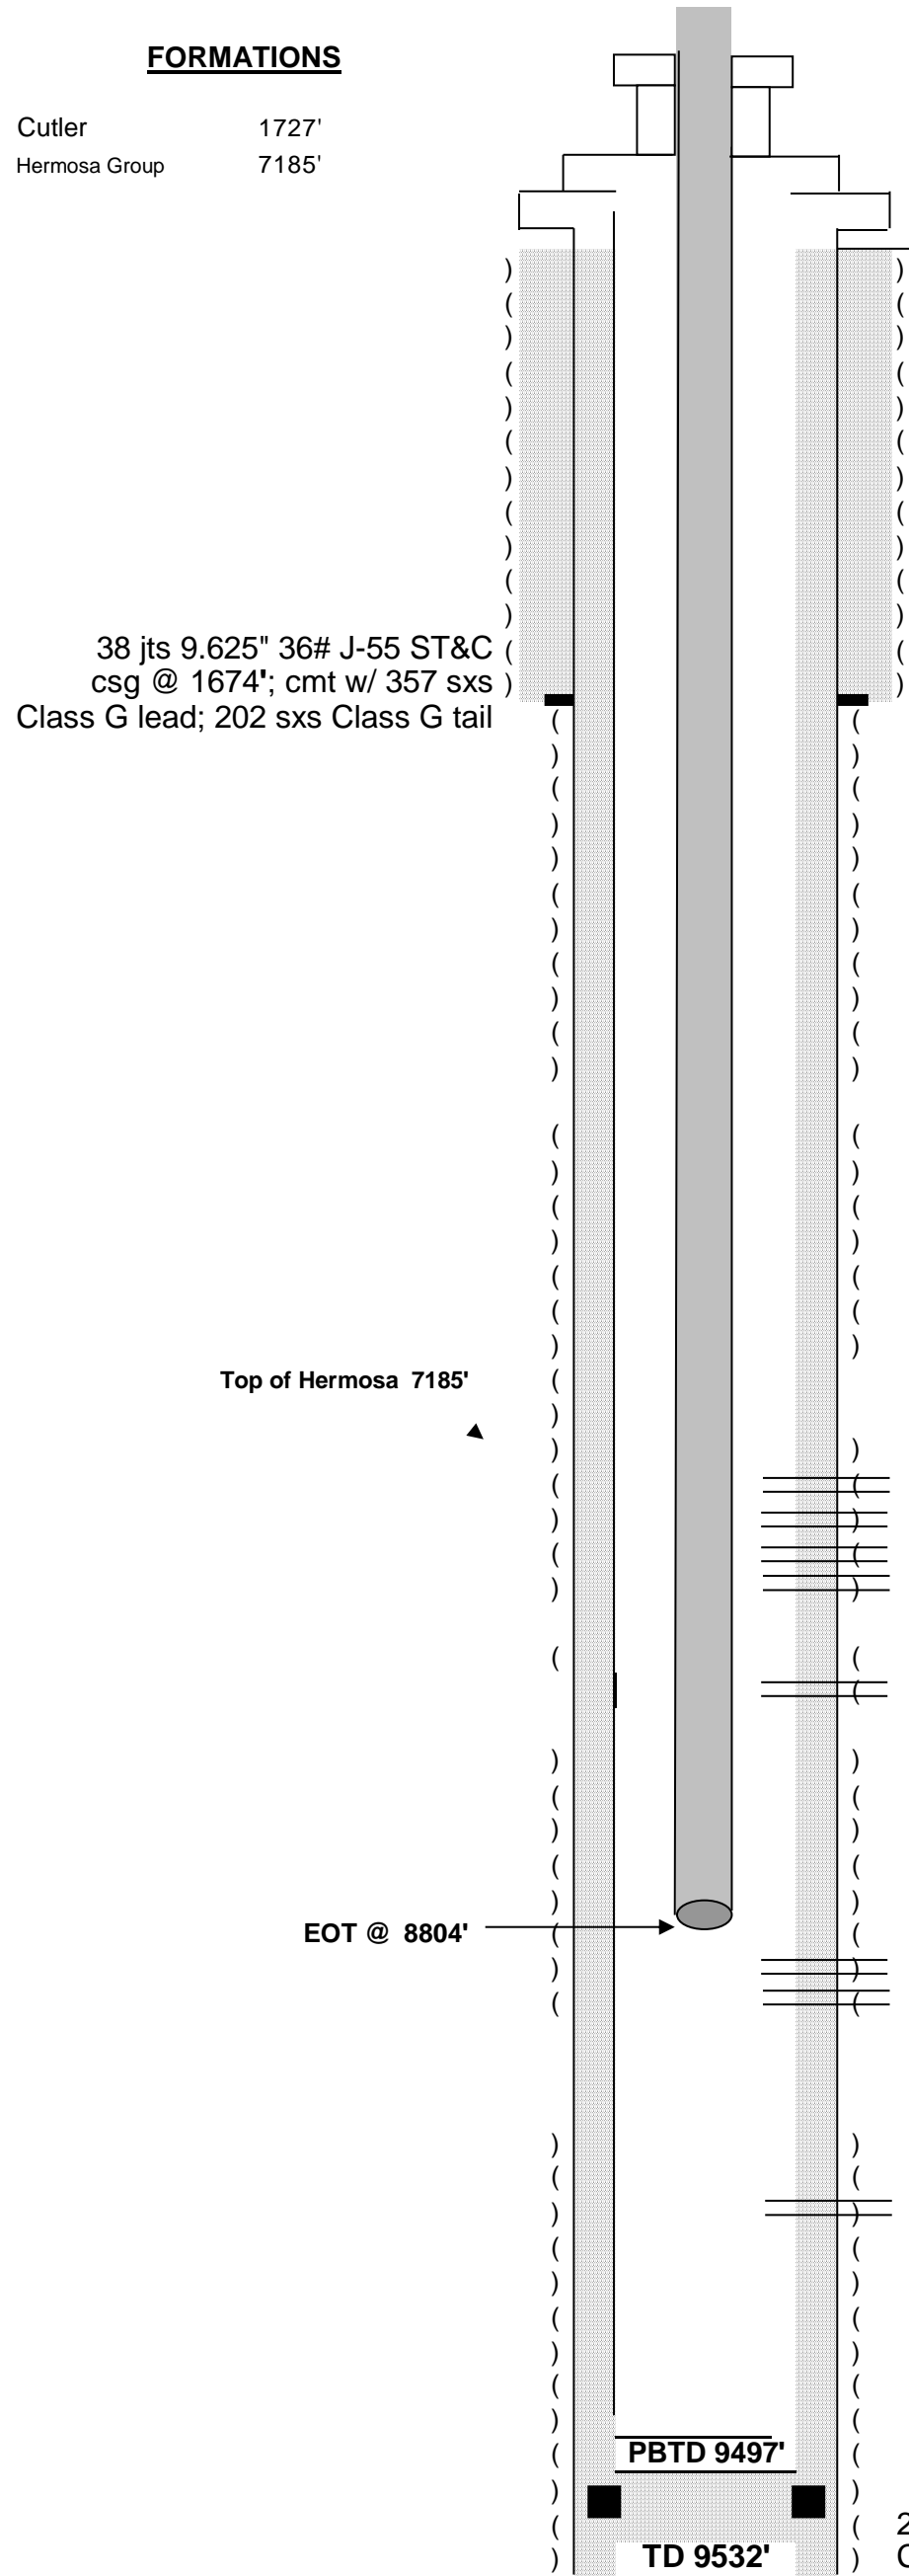

KB	6605.8'
GL	6586.4'

Well History

Spud Date	11-15-2006
TD Reached	12-09-2006
Rig Released	12-10-2006

Tubing Detail (as of 6/18/08):	Depth:
KB	18.00
279 jts 2-7/8" 6.5# L-80 new tbg	8745.52
2.31 F-Nipple	0.97
1 jt 2-7/8" tbg	31.43
2.25 F-Nipple	0.96
Pup Joint	6.10
Re-Entry Guide	0.64
EOT	8803.62

Top of Hermosa 7185'

EOT @ 8804'

8367' - 8380'	Honaker Trail shot 12-20-06, 184 holes
8389' - 8414'	3-3/8", 4 SPF, 120° phasing
8427' - 8448'	Frac'd w/ SLB 71,000 gal WF 120 70Q foam,
8460' - 8470'	7,960 gal of WF 120 and 196,000# of 20/40 Jordan-Unimin sand and 30,000# of Optiprop. 12-21-06
8538' - 8580'	Honaker Trail shot 12-20-06, 42 holes
	3-3/8", 1 SPF, 120° phasing
	Frac'd w/ SLB 64,000 gal WF 120 70Q foam,
	8,127 gal of WF 120 and 170,000# of 20/40 Jordan-Unimin sand and 30,000# of Optiprop. 12-20-06
8838' - 8845'	LaSal Perfs shot 12-19-06, 54 holes
8848' - 8861'	3-3/8", 4 SPF, 120° phasing
	Frac'd w/ SLB 37,000 gal WF 120 70Q foam,
	8,420 gal of WF 120 and 75,000# of 20/40 Jordan-Unimin sand and 25,000# of Optiprop. 12-19-06
9450' - 9459'	Ismay Perfs shot 12-18-06, 36 holes
	3-3/8", 4 SPF, 120° phasing
	Frac'd w/ SLB 31,000 gal WF 120 70Q foam,
	8,420 gal of WF 120 and 50,000# of 20/40 Jordan-Unimin sand and 25,000# of Optiprop. 12-18-06
PBTD 9497'	
TD 9532'	217 jts 5.5" 17# P-110 LT&C csg @ 9505' Cmt w/ 1970 sxs 50/50 Poz G tail