

NOBLE ENERGY INC.
 Lilli Unit 6-6
 SENW 6-8N-58W
 3085' FSL & 1780' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 5/26/2015

API: 05-123-14022
 COGCC #

GL Elev: 4,799.00
 KB Elev: 4,808.00


Spud Date:

Surface Casing :
 8 5/8" 24# @ 260'
 Cement: 170 sxs
 TOC: Surface

TOC @ 5,498'

Nio Top 5,768'

Production Casing :
 4 1/2" 10.5# @ 6618'
 Cement: 190 sxs
 TD: 10/11/1988

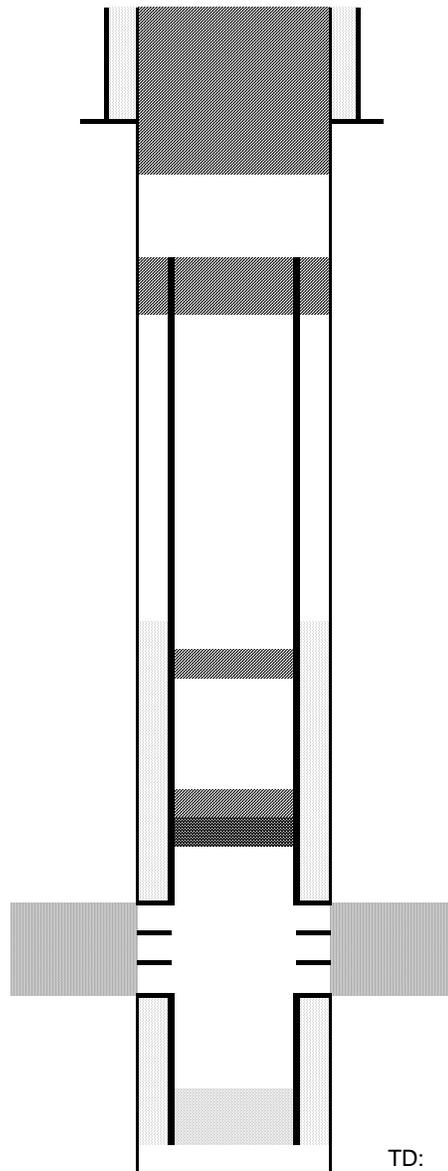

Cut surface casing off 6'-8' below surface.

Pump approx 325 sx shoe plug @ 845'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2,500'

Pump 10 sxs over top of Nio at 5,768'

CIBP @ 6,448' w/ 2 sx cement on top

D Sand 6,498' - 6,508'

TD: 6,618.00