

**NOBLE ENERGY INC.**  
 EMBREE 10-03  
 NENW 10-4N-64W  
 659' FNL & 1979' FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 6/2/2015

API: 05-123-17581  
 COGCC #


GL Elev: 4661'  
 KB Elev: 4674'

**Spud Date:** 12/11/1993

**Surface Casing :**  
 7" 17# @ 511'  
 Cement: 286 sx  
 TOC: Surface

**TOC @ 6008'**

**Production Casing :**  
 3 1/2" 7.7# @ 6988'  
 Cement: 150 sx  
 TD: 12/21/1993

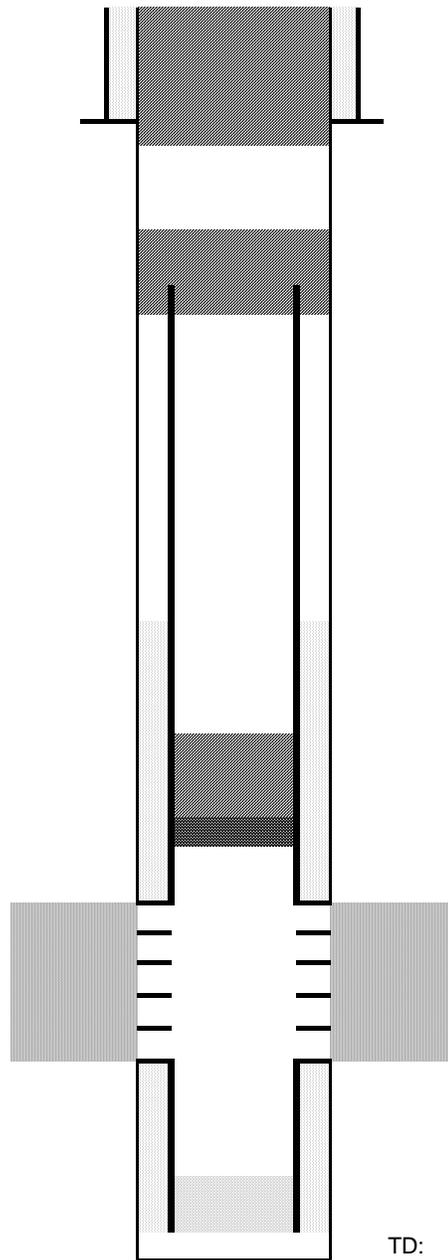

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug @ 620'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

20 sx balance plug @ 6750' (on top of CIBP)

CIBP @ 6750'

Codell Perforations 6800' - 6812'

TD: 7020'