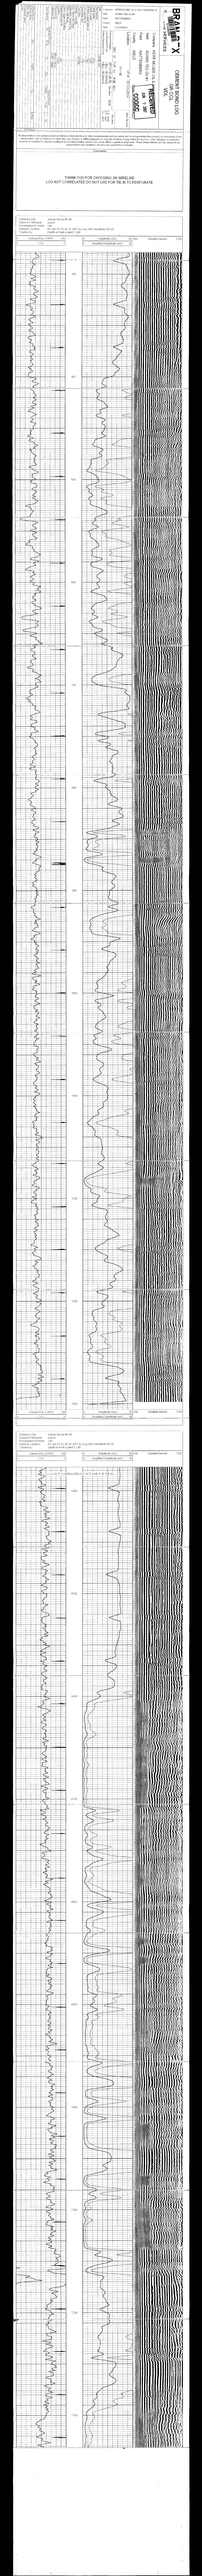
BRAUN X
CEMENT BOND LOG
VDL
GAMMA RAY CCL
Company: BRAUN OIL & GAS CORPORATION
Well: BRAUN X
Field: WILDCAT
County: MAYO
State: OKLAHOMA
Other Services: GR-CCL
Permanent Datum: GROUND LEVEL
Elev.: 1,000 ft
Log Measured From: KELLY BUSHING
Drilling Measured From: KELLY BUSHING
Elev.: K.B. 1,012 ft
D.F. 1,011 ft
G.L. 1,000 ft
Date: 03-15-2007
Run No.: ONE
Depth-Driller: 5,000 ft
Depth-Logger: 4,998 ft
Bottom Log Interval: 4,998 ft
Top Log Interval: 1,000 ft
Casing-Driller: 7" @ 5,000 ft
Casing-Logger: 5,000 ft
Bit Size: 6 1/4 in
Type Fluid in Hole: WATER BASED MUD
Density: 9.2 lb/gal
Viscosity: 38 s
Fluid Loss: 8.4 cc
Source of Sample: CIRCULATED
Rm @ Meas. Temp: 0.18 @ 72 °F
Rmf @ Meas. Temp: 0.14 @ 72 °F
Rmc @ Meas. Temp: 0.24 @ 72 °F
Source of Rmf / Rmc: MEASURED / CALCULATED
Rm @ BHT: 0.11 @ 148 °F
Time Since Circulation: 4 HRS
Max. Rec. Temp.: 148 °F
Equipment No.: 2007
Location: 1320 FSL & 1320 FEL
Recorded By: J. SMITH
Witnessed By: R. JONES
CEMENT TOP 1,000
CEMENT BOTTOM 4,998
THANK YOU FOR CHOOSING JW-WIRELINE
LOG NOT CORRELATED DO NOT USE FOR TIE IN TO PERFORATE

Company: xxxxx Xxx gas dft dft
Field: xxxxx
Formation/Zone: xxxx
Permanent Datum: GL
Log Measured From: 1ft, 1m 01-01-01, 2007 Log Unit: Unit/Month 2012
Drilling Measured From: KB
Depth-Driller: 4,998
Depth-Logger: 4,998
Bottom Log Interval: 4,998
Top Log Interval: 1,000
Casing-Driller: 7" @ 5,000 ft
Casing-Logger: 5,000 ft
Bit Size: 6 1/4 in
Type Fluid in Hole: WATER BASED MUD
Density: 9.2 lb/gal
Viscosity: 38 s
Fluid Loss: 8.4 cc
Source of Sample: CIRCULATED
Rm @ Meas. Temp: 0.18 @ 72 °F
Rmf @ Meas. Temp: 0.14 @ 72 °F
Rmc @ Meas. Temp: 0.24 @ 72 °F
Source of Rmf / Rmc: MEASURED / CALCULATED
Rm @ BHT: 0.11 @ 148 °F
Time Since Circulation: 4 HRS
Max. Rec. Temp.: 148 °F
Equipment No.: 2007
Location: 1320 FSL & 1320 FEL
Recorded By: J. SMITH
Witnessed By: R. JONES
Gamma Ray (API) 0 150
Caliper (in) 6 16
Variable Density 100
Acoustic Impedance (mrayls) 10 40
Acoustic Impedance (mrayls) 10 40
Variable Density 100
Gamma Ray (API) 0 150
Caliper (in) 6 16
Variable Density 100
Acoustic Impedance (mrayls) 10 40
Acoustic Impedance (mrayls) 10 40
Variable Density 100