

NOBLE ENERGY INC.
 Goodner 06-01
 NESE 6-4N-65W
 1980' FSL & 660' FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 6/30/2015


API: 05-123-13912
 COGCC #

GL Elev: 4,685'
 KB Elev: 4,695'

Spud Date:

Surface Casing :
 8-5/8" 24# @ 430'
 Cement: 450
 TOC: Surface

Production Casing :
 4-1/2" 11.6# N-80 @ 7,350'
 Cement: 230 sx
 TD: 4/13/2015

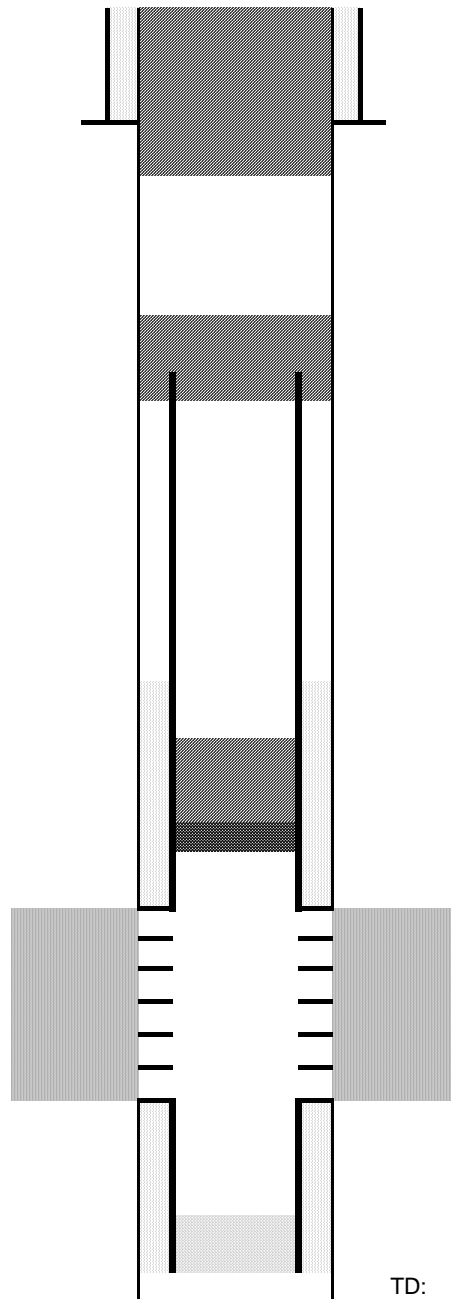

Cut surface casing off 6'-8' below surface.

Pump approx 205 sx shoe plug @ 530'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

TOC @ 6,150'

Nio Top 6,851'

CIBP @ 7,136' w/ 30 sx cement on top

Codell Perforations 7,186' - 7,199'

TD: 7,351'