

Company: Noble Energy Inc

Well: Morton State LD01 79 1BHN
Field: Wildcat
County: Weld State: Colorado

County: Weld		USI-LITE (2500 psi)	
Field: Wildcat			
Location: SWSW 1 9N 58W			
Well: Morton State LD01 79 1BHN			
Company: Noble Energy Inc			
LOCATION			
Permanent Datum:		Elev: K.B. 4672.0 F	
Log Measured From:		G.L. 4656.0 F	
Drilling Measured From:		D.F. 4656.0 F	
GL KB KB			
API Serial No. 05-123-39899	Section 1	Township 9N	Range 58W
Logging Date	08-Jan-2015		
Run Number	Run 1		
Depth Driller	5865.0 F		
Schlumberger Depth	5865.0 F		
Bottom Log Interval	5704.0 F		
Top Log Interval	49.0 F		
Casing Fluid Level	0.0 F		
Salinity			
Density	8.40 LB/G		
Fluid Level	0.0 F		
BIT/CASING/TUBING STRING			
Bit Size	8.750 IN		
From	1236.0 F		
To	5865.0 F		
Casing Size	7.00 IN		
Weight	26.00 LB/F		
Grade	P110		
From	0.0 F		
To	5859.3 F		
Max Recorded Temp	200.0		
Logger on bottom (date)	08-Jan-2015		
Location	Fort Morgan		
Recorded By	Tezia Hayduk		
Witnessed By	Bill Mansfield		

DEPTH SUMMARY LISTING

DEPTH SYSTEM EQUIPMENT

Depth Measuring Device	Tension Device	Logging Cable
Type: Serial Number: Calibration Date: Calibration Cable Type: Wheel Correction 1: Wheel Correction 2:	Type: Serial Number: 1109 Calibration Date: Calibrator Serial Number: Number Of Calibration Points: Calibration RMS: Calibration Peak Error:	Serial Number: Length: 16500.00000

DISCLAIMER

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIIONS ON USE OF THE RECORDED-DATA (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF ANR RELIANCE UPN THE RECORDED-DATA; AND (c)CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISIONS MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA

2500psi main pass 0psi repeat pass


Top of cement seen @ 1240ft


Logged from top of liner to surface


Bottom hole temperature measured at depth = 200F


Main Pass


Company: Noble Energy Inc
Well: Morton State LD01 79 1BHN
Field: Wildcat

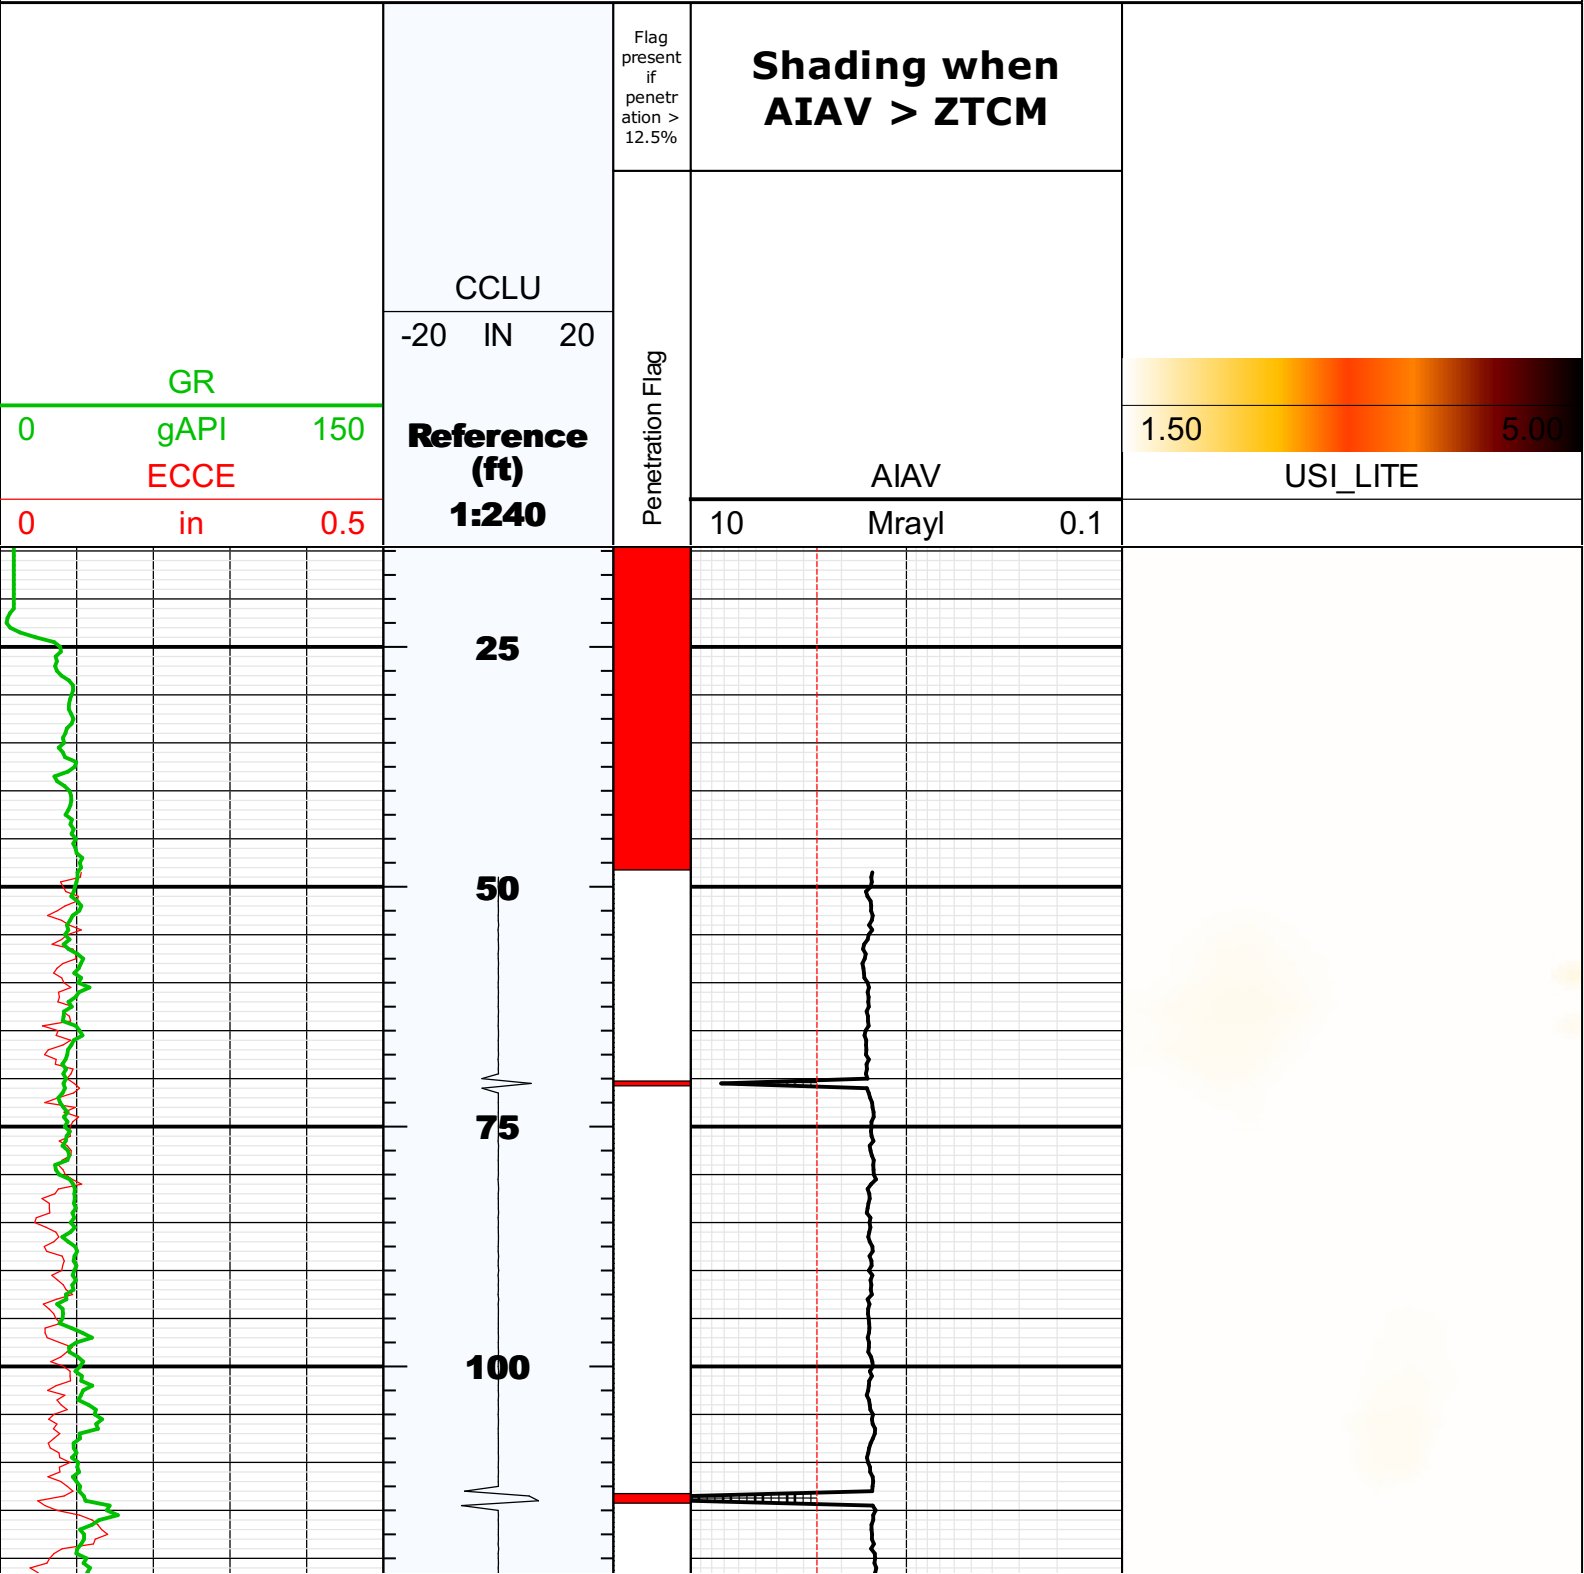


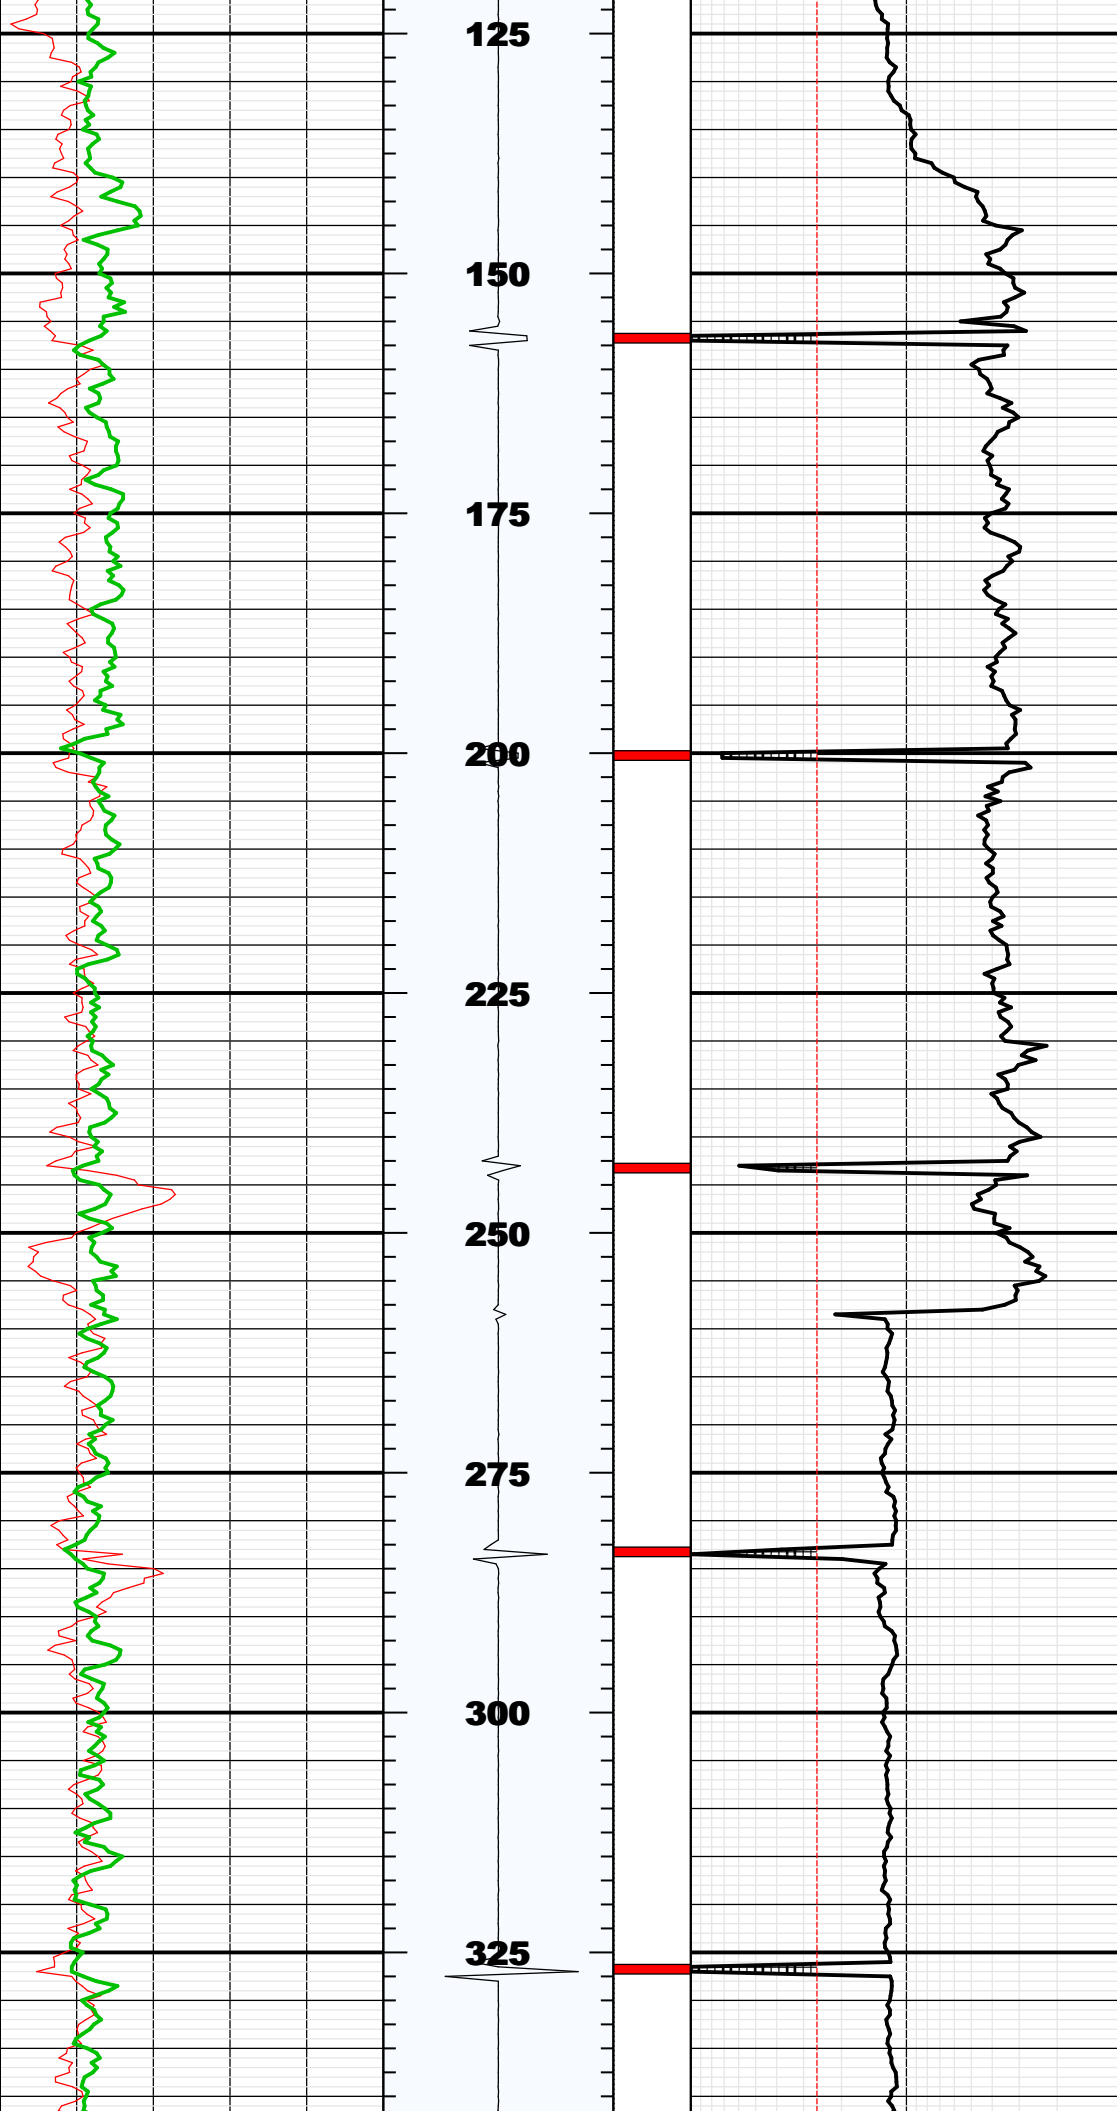


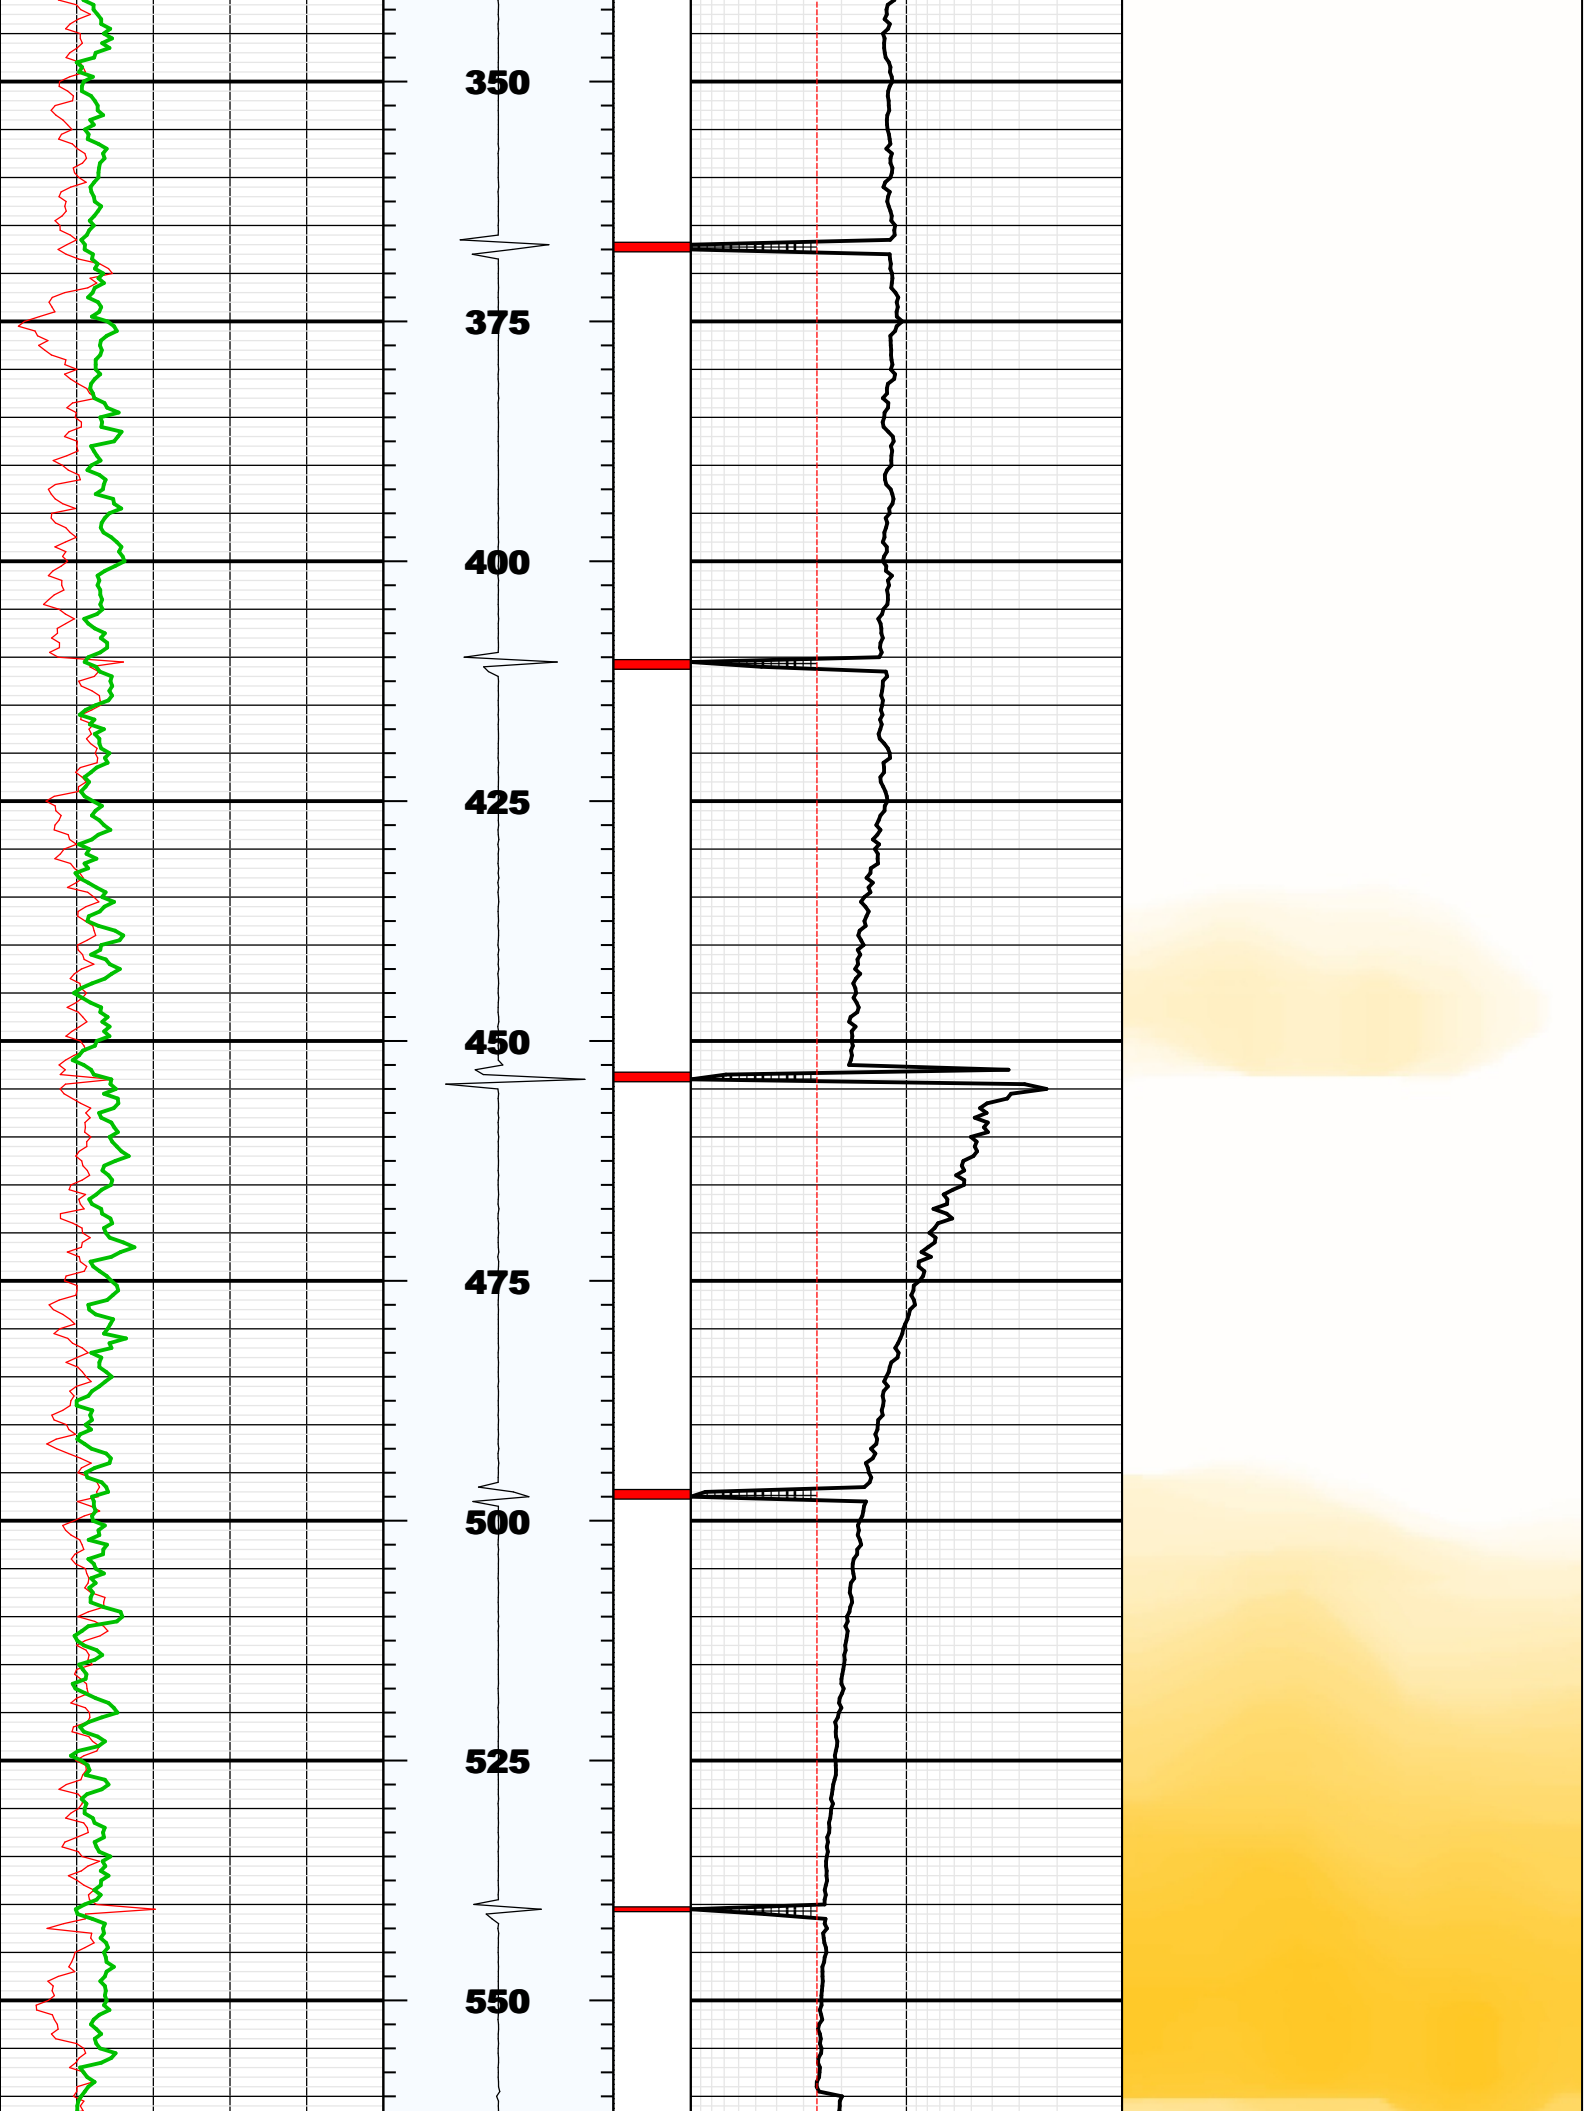


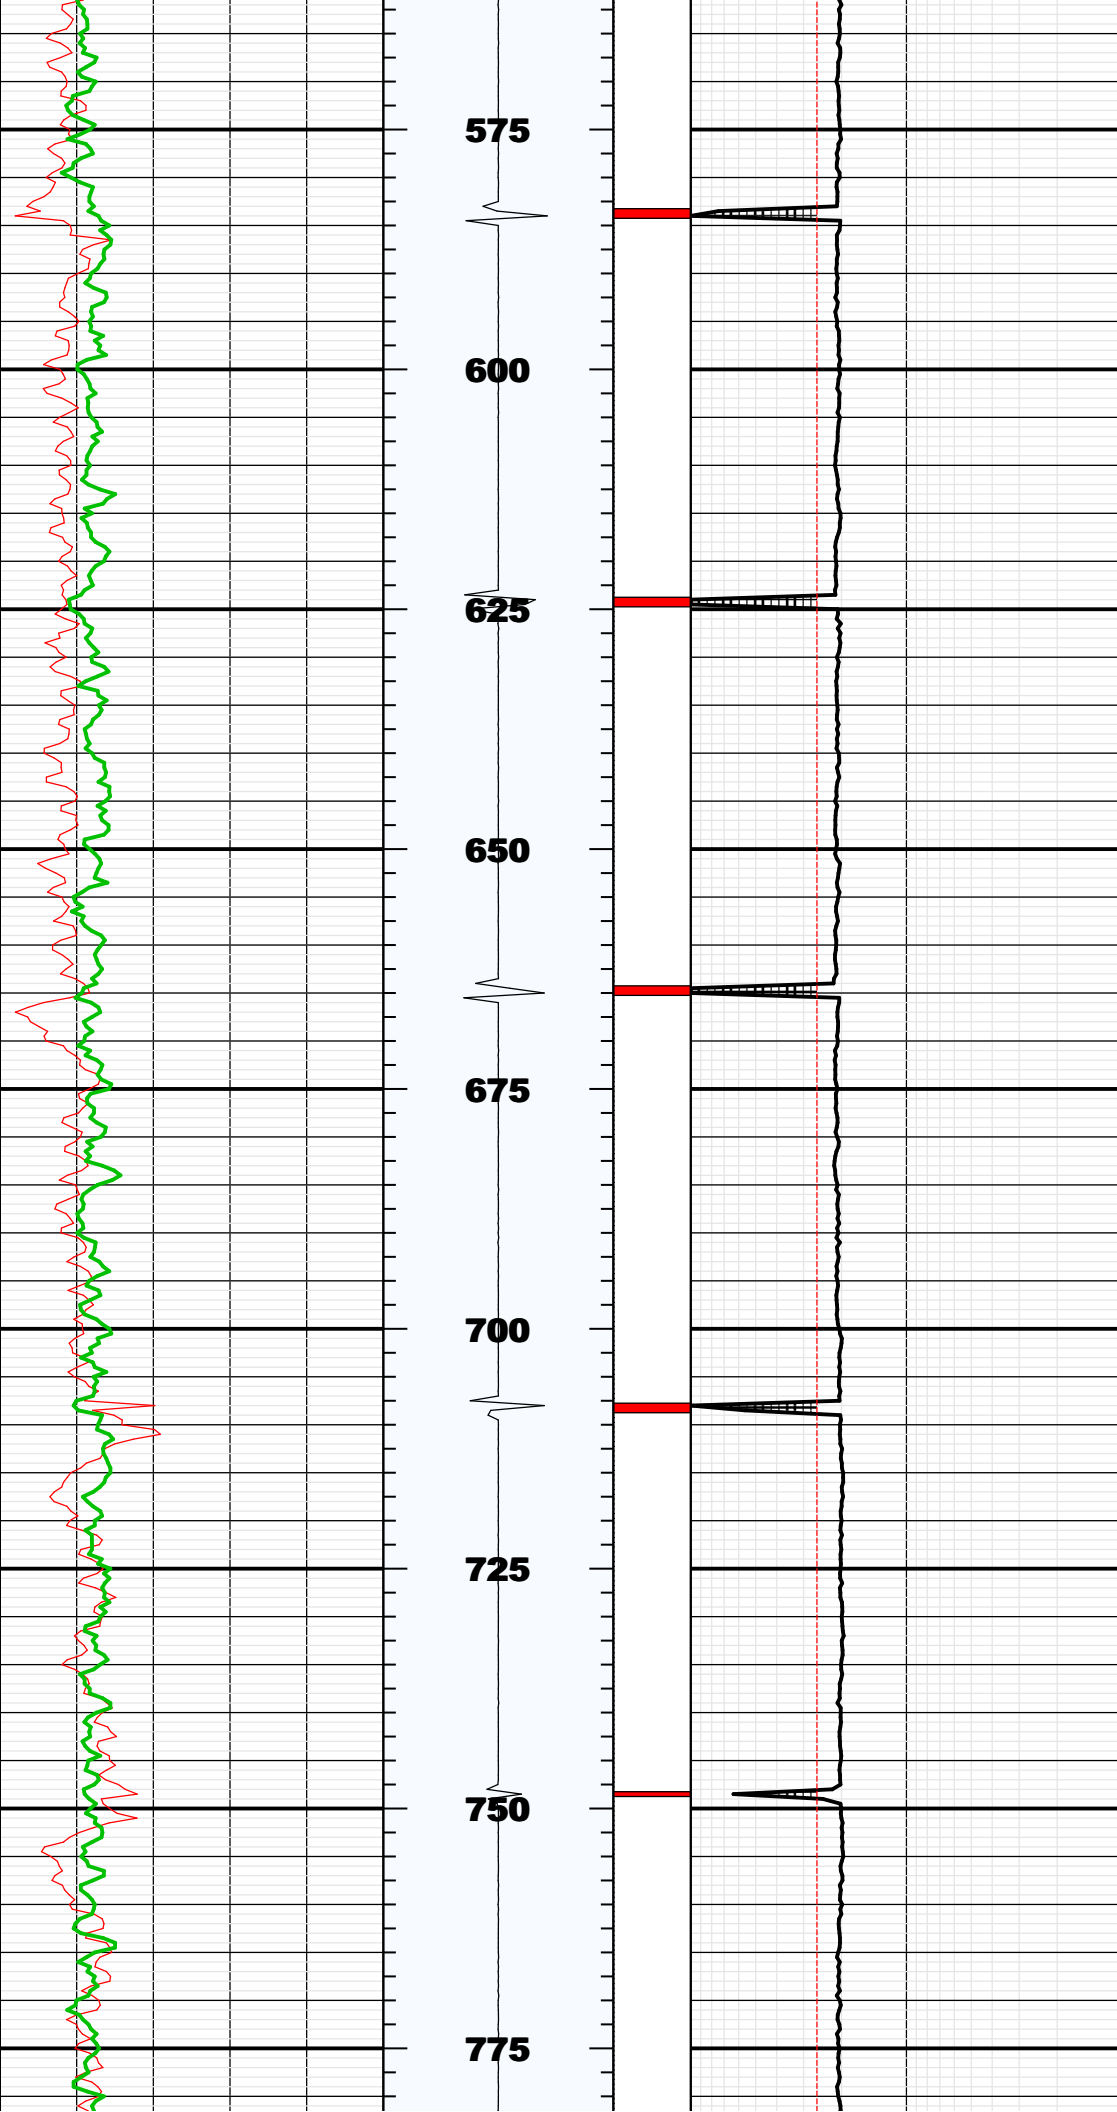


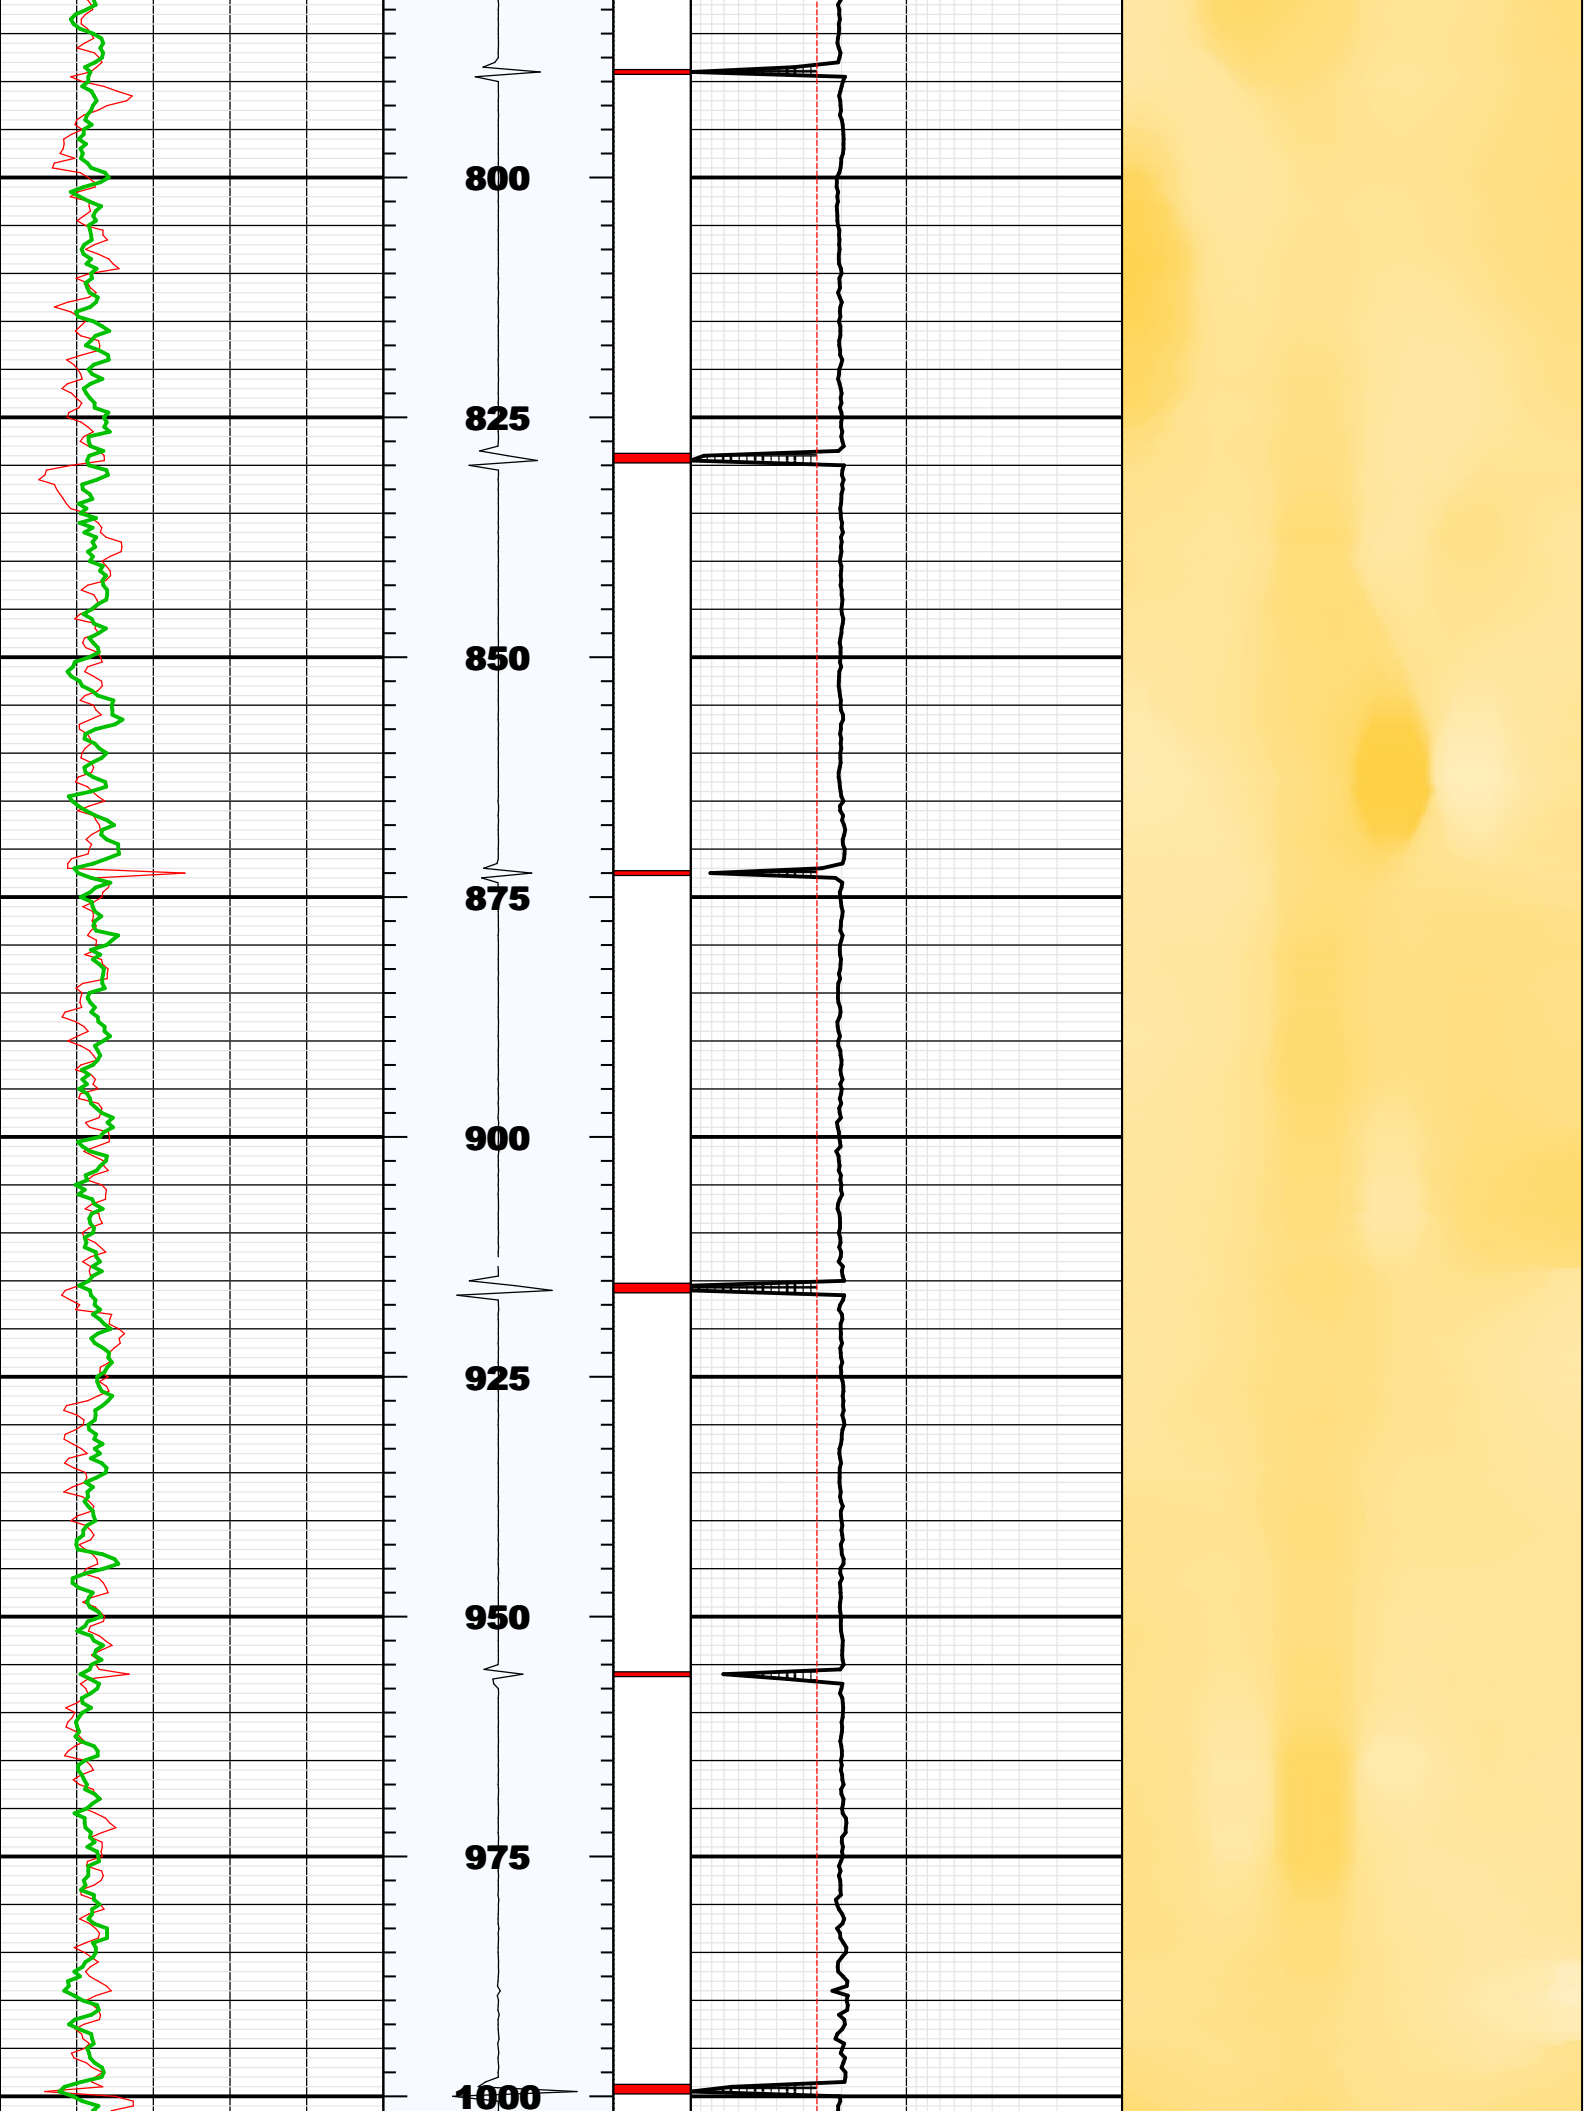


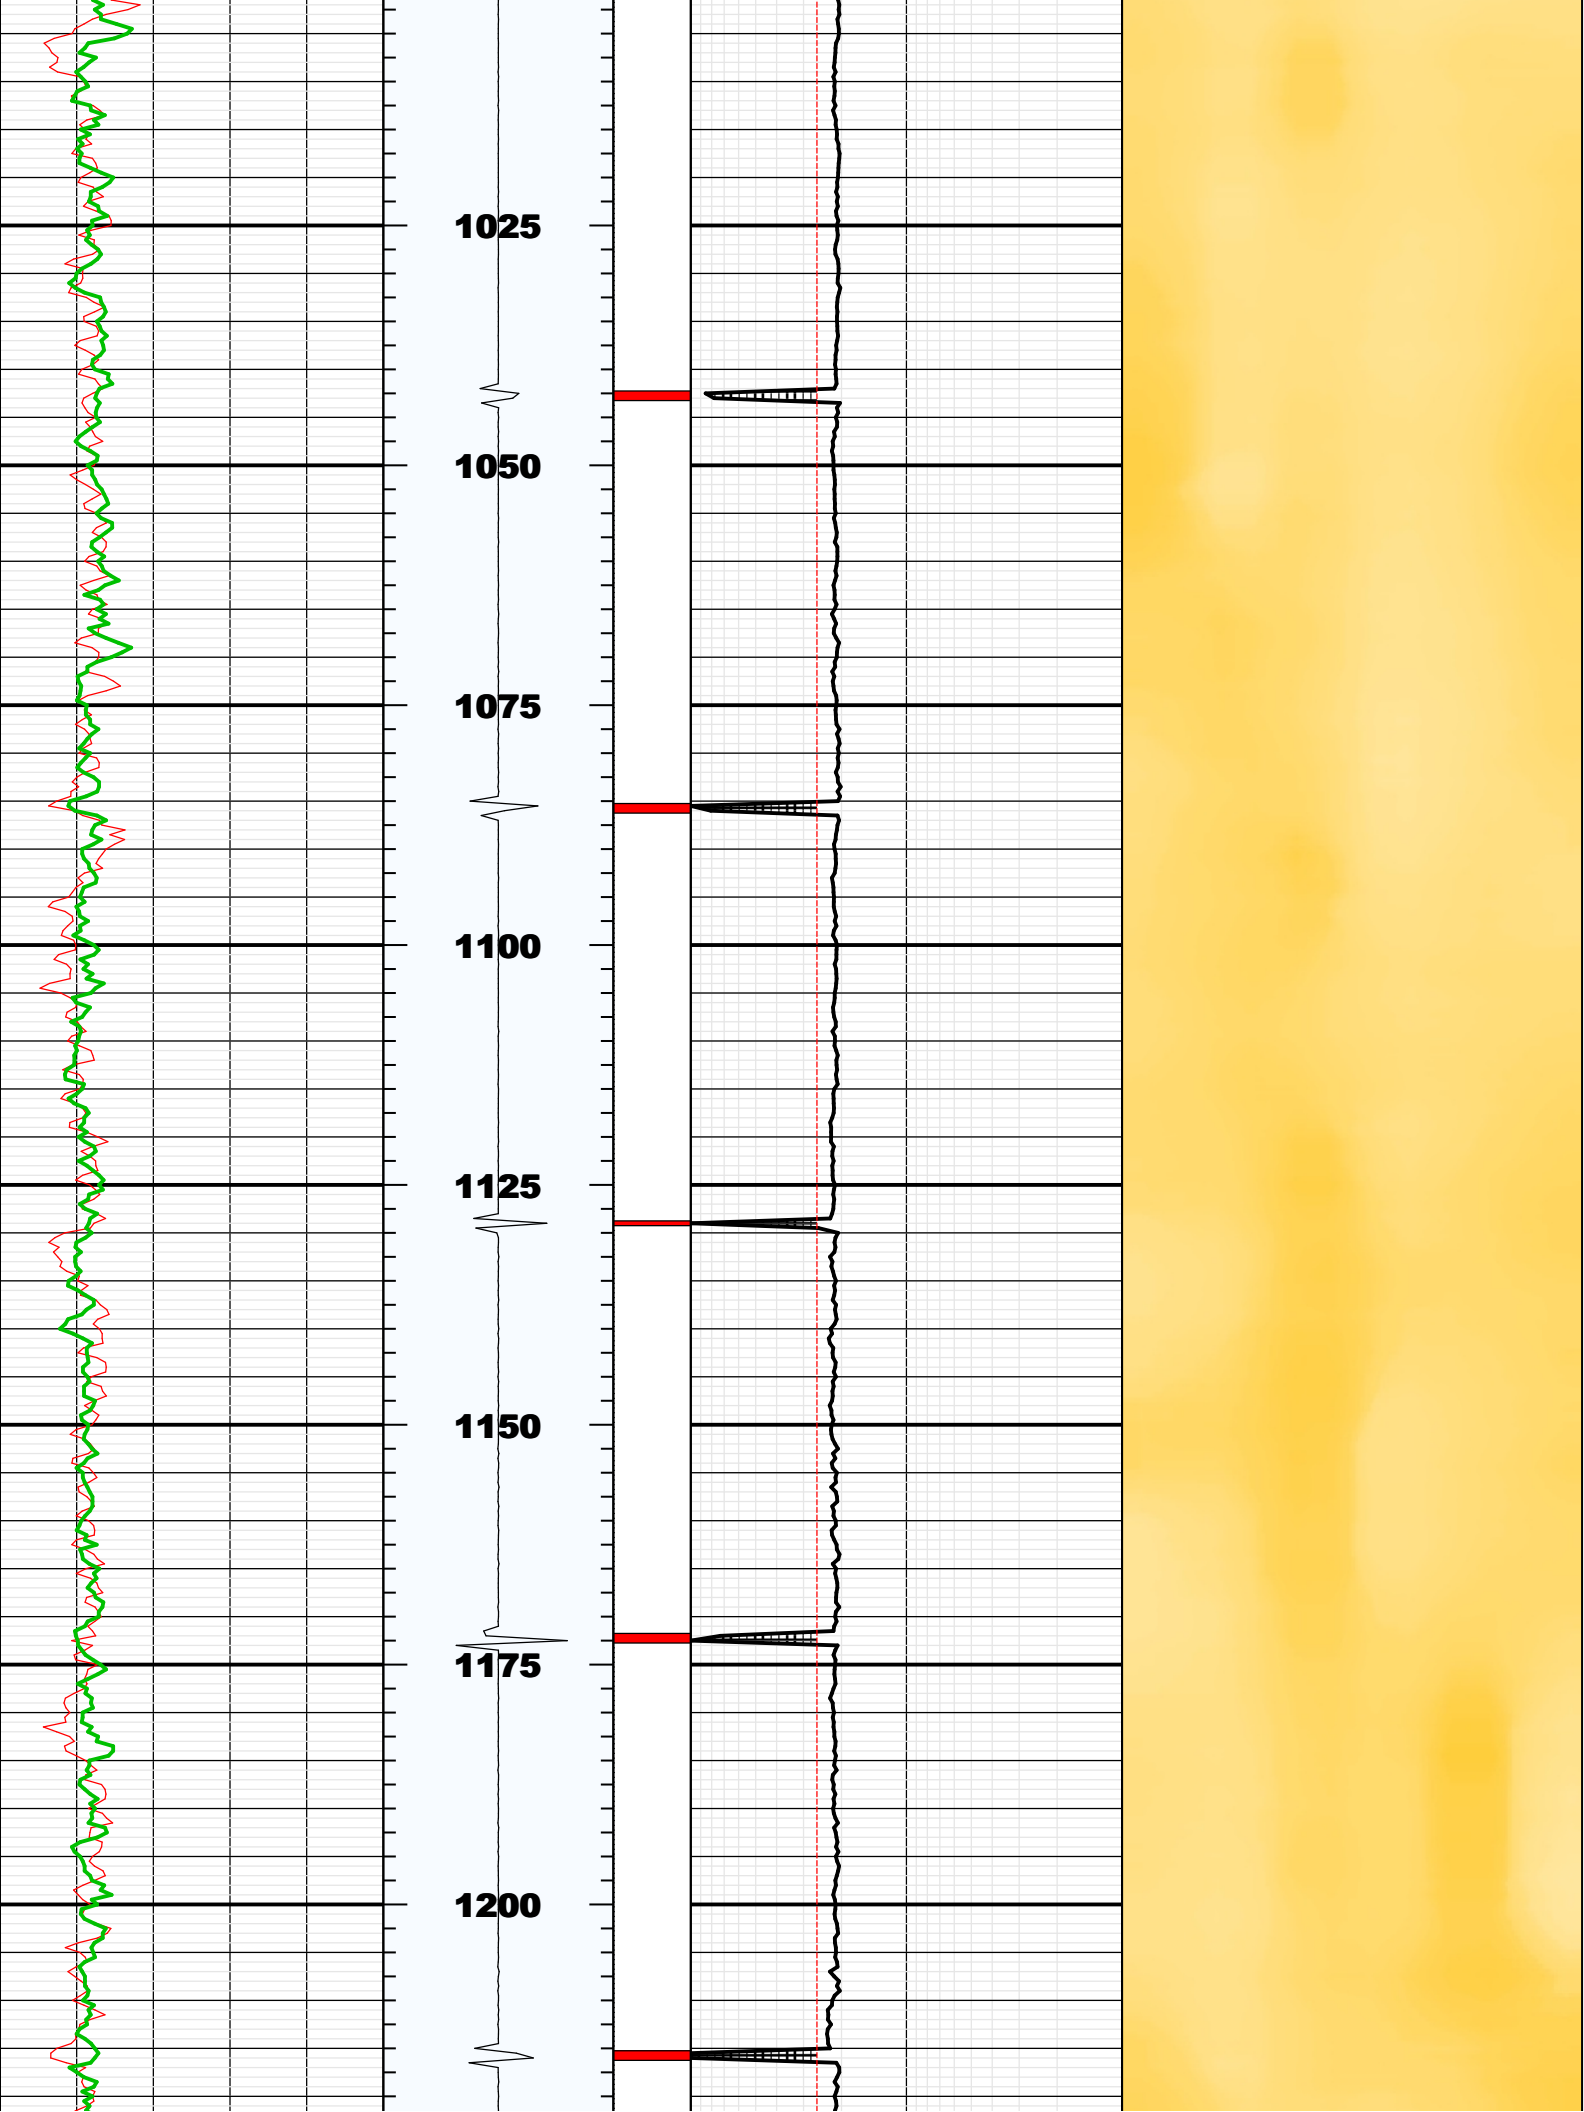


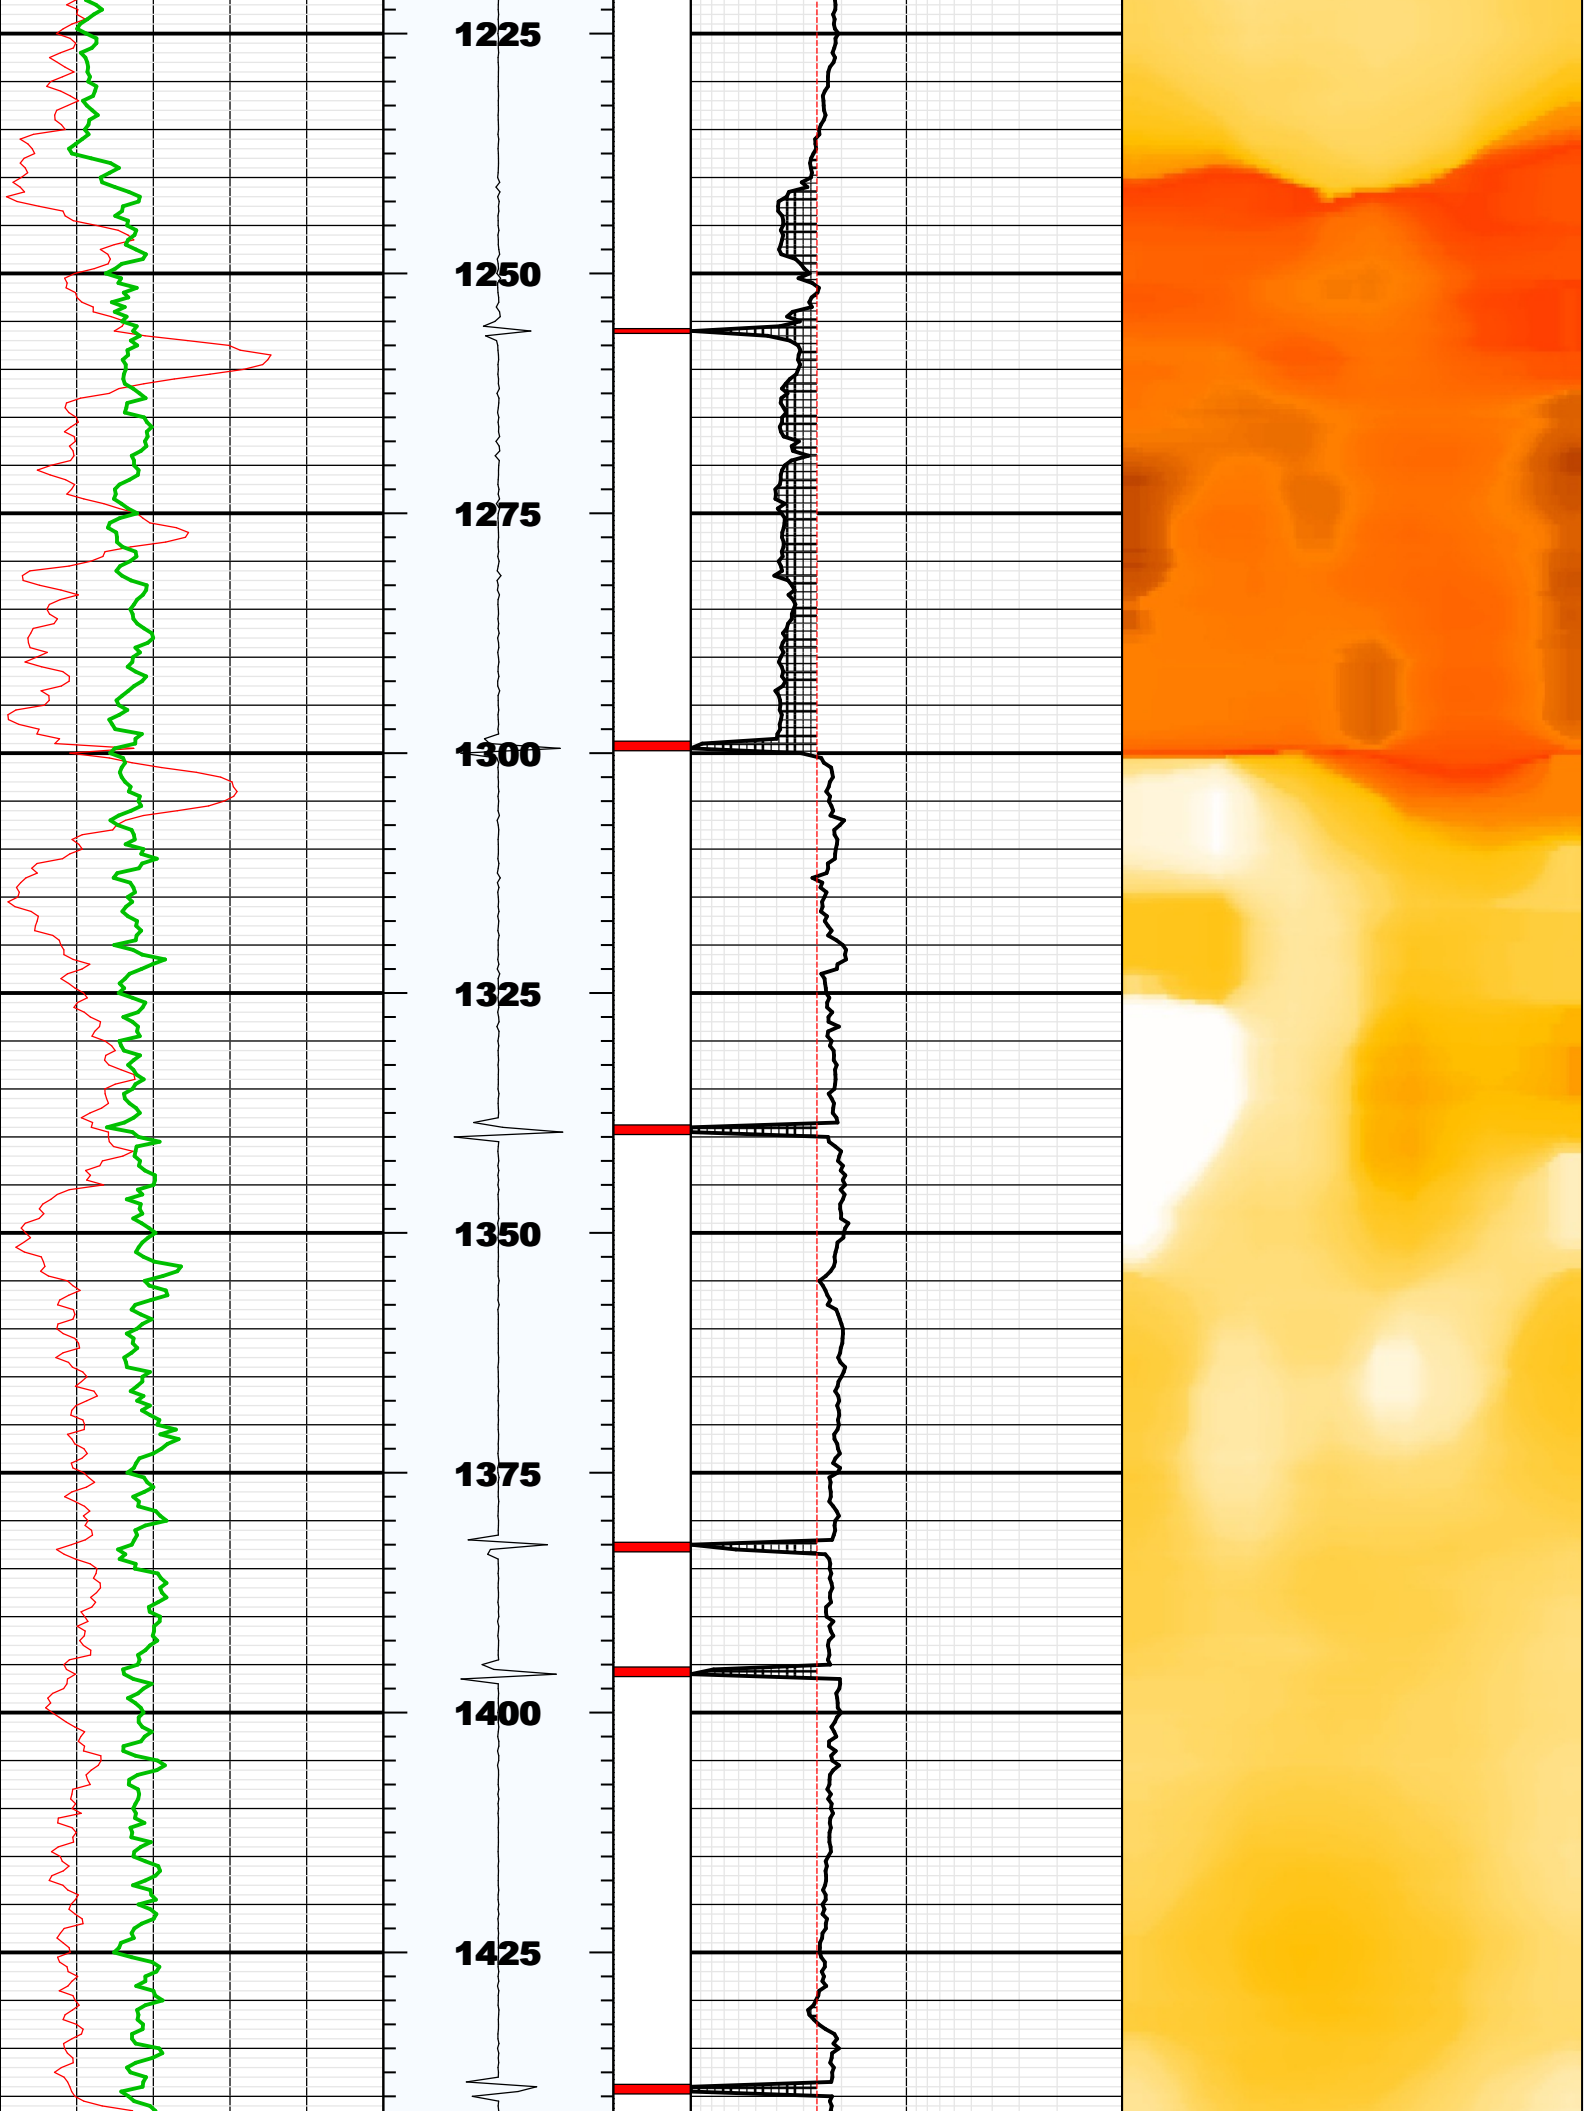


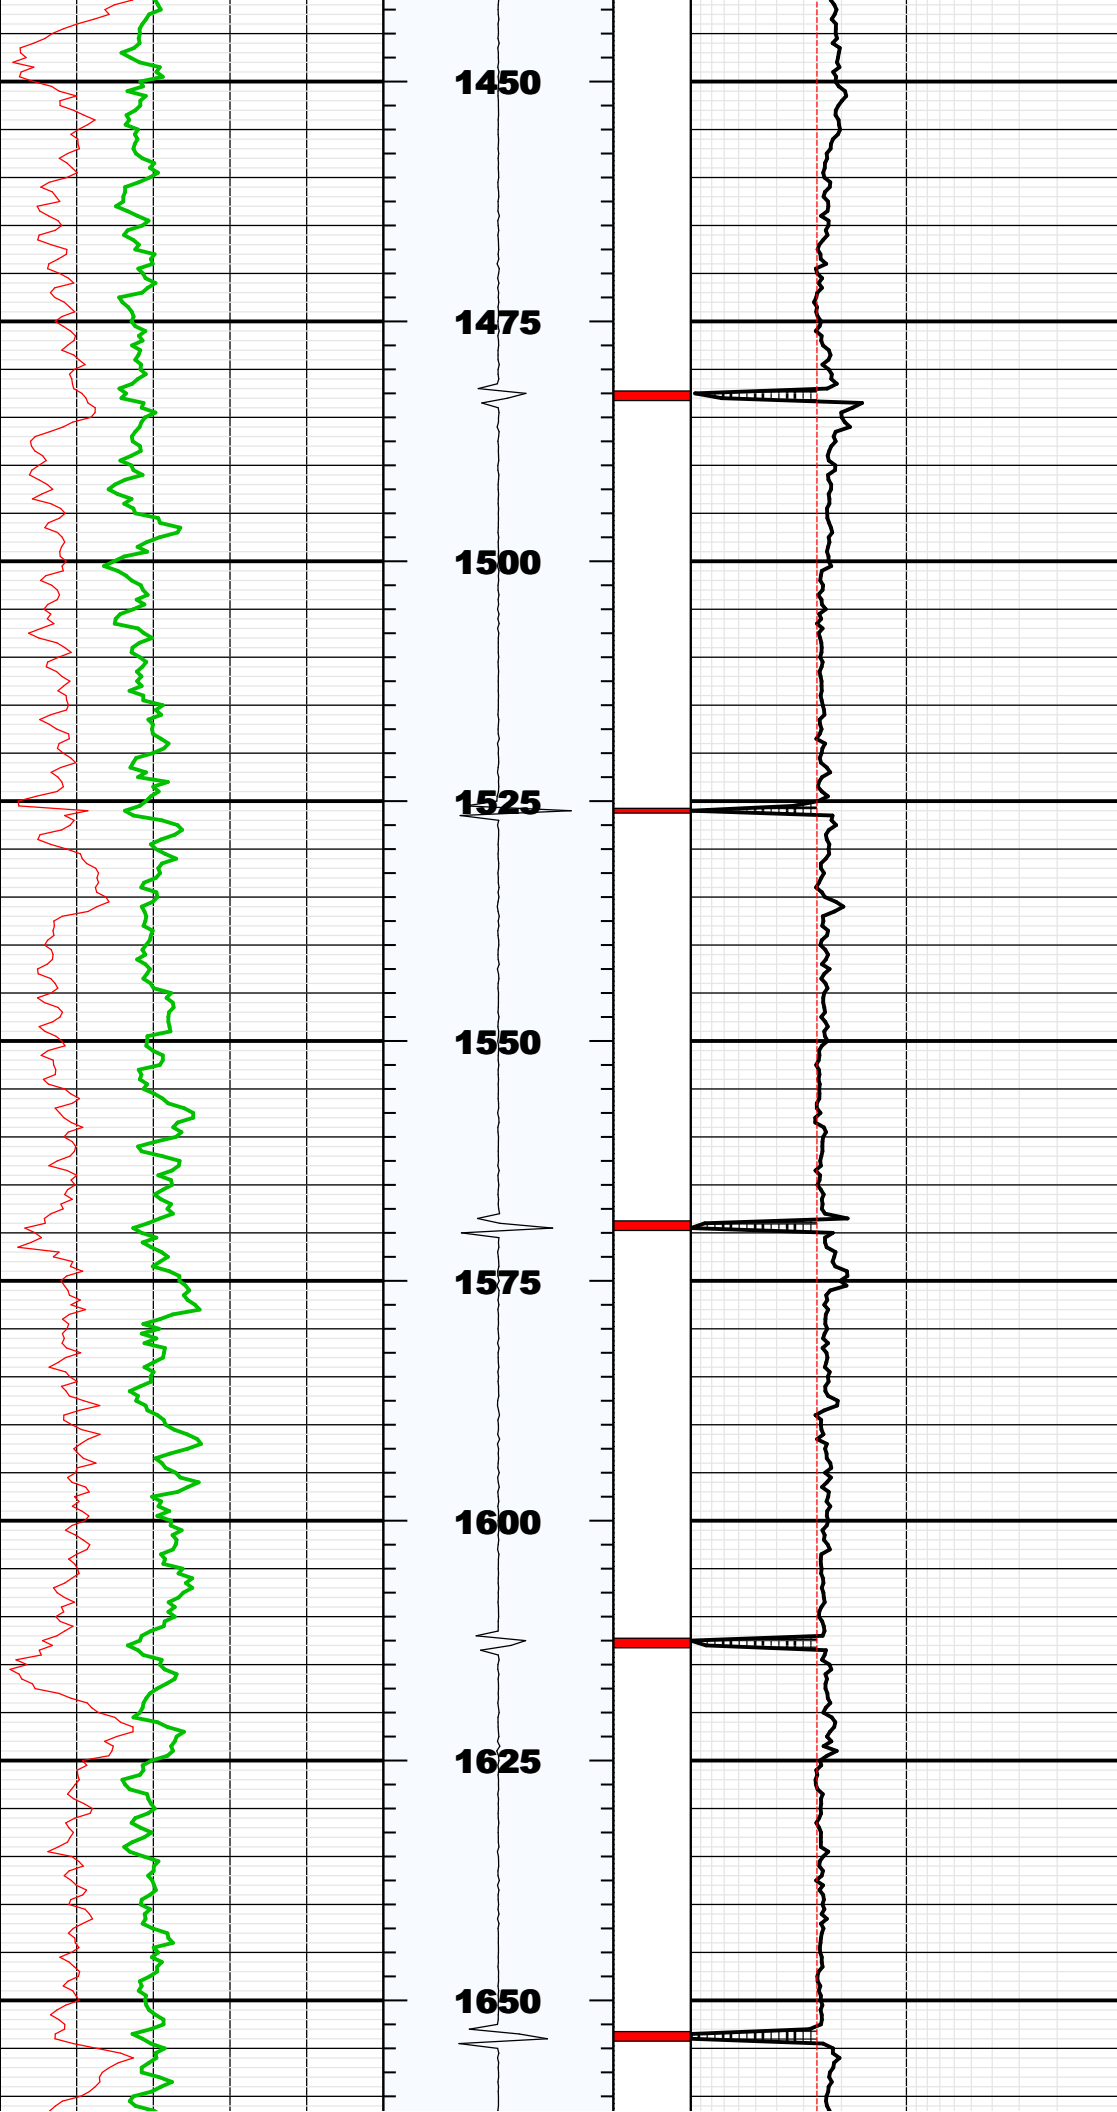


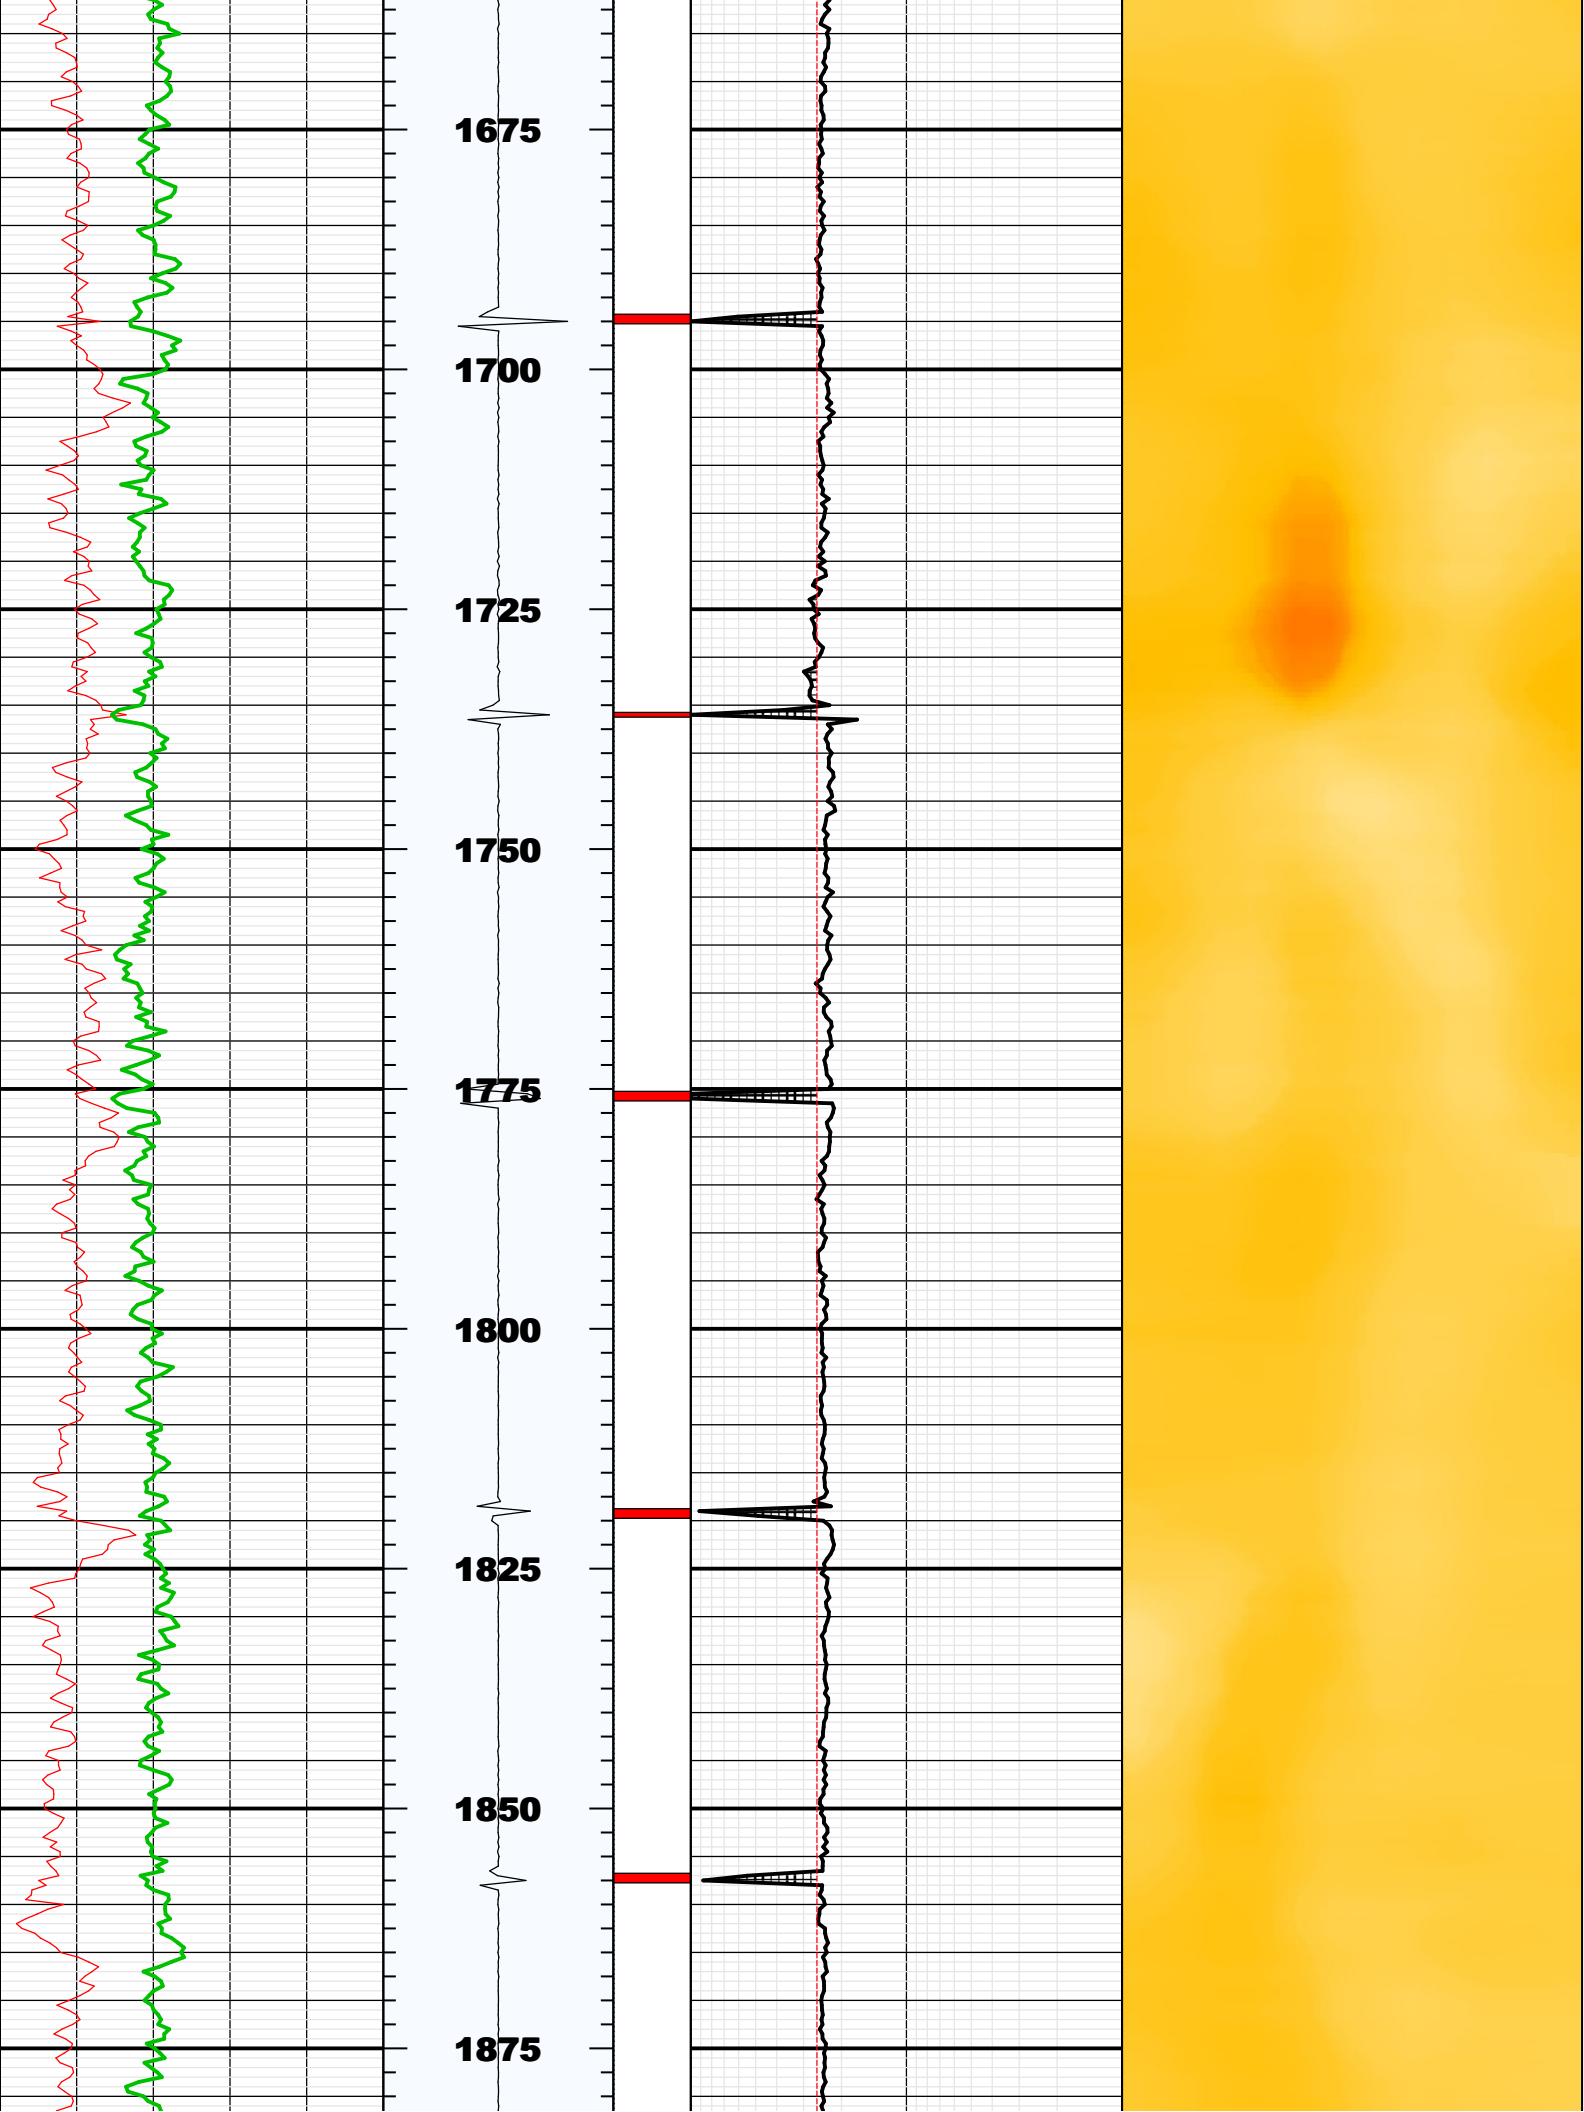


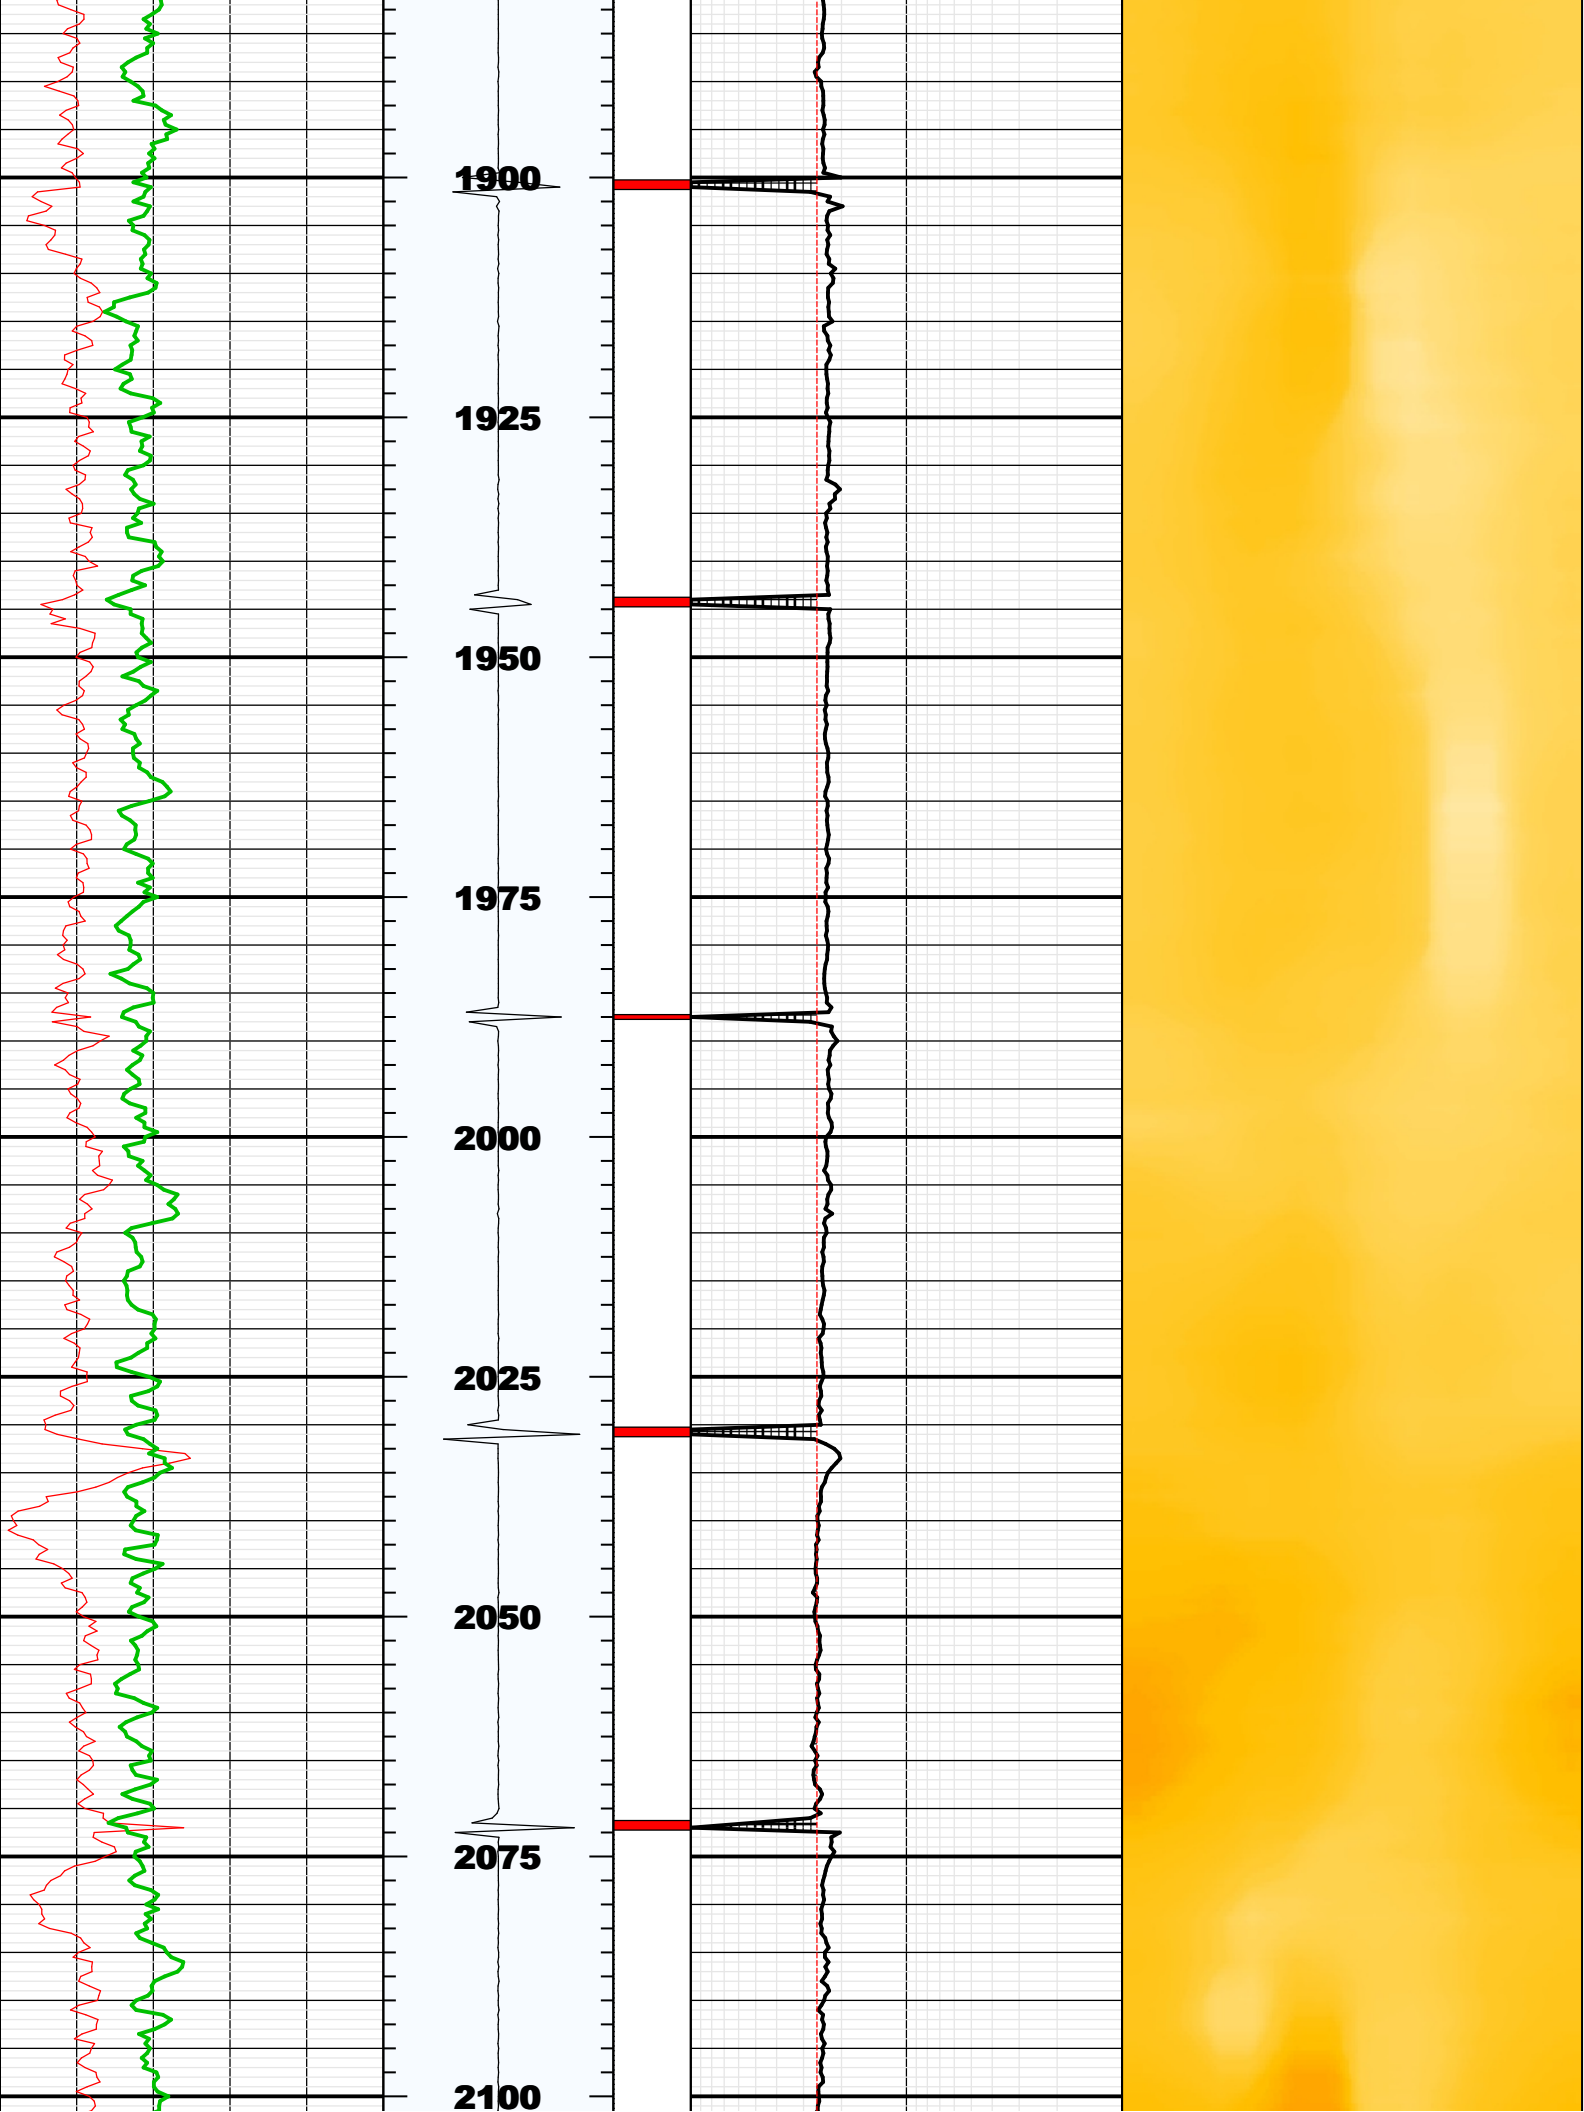


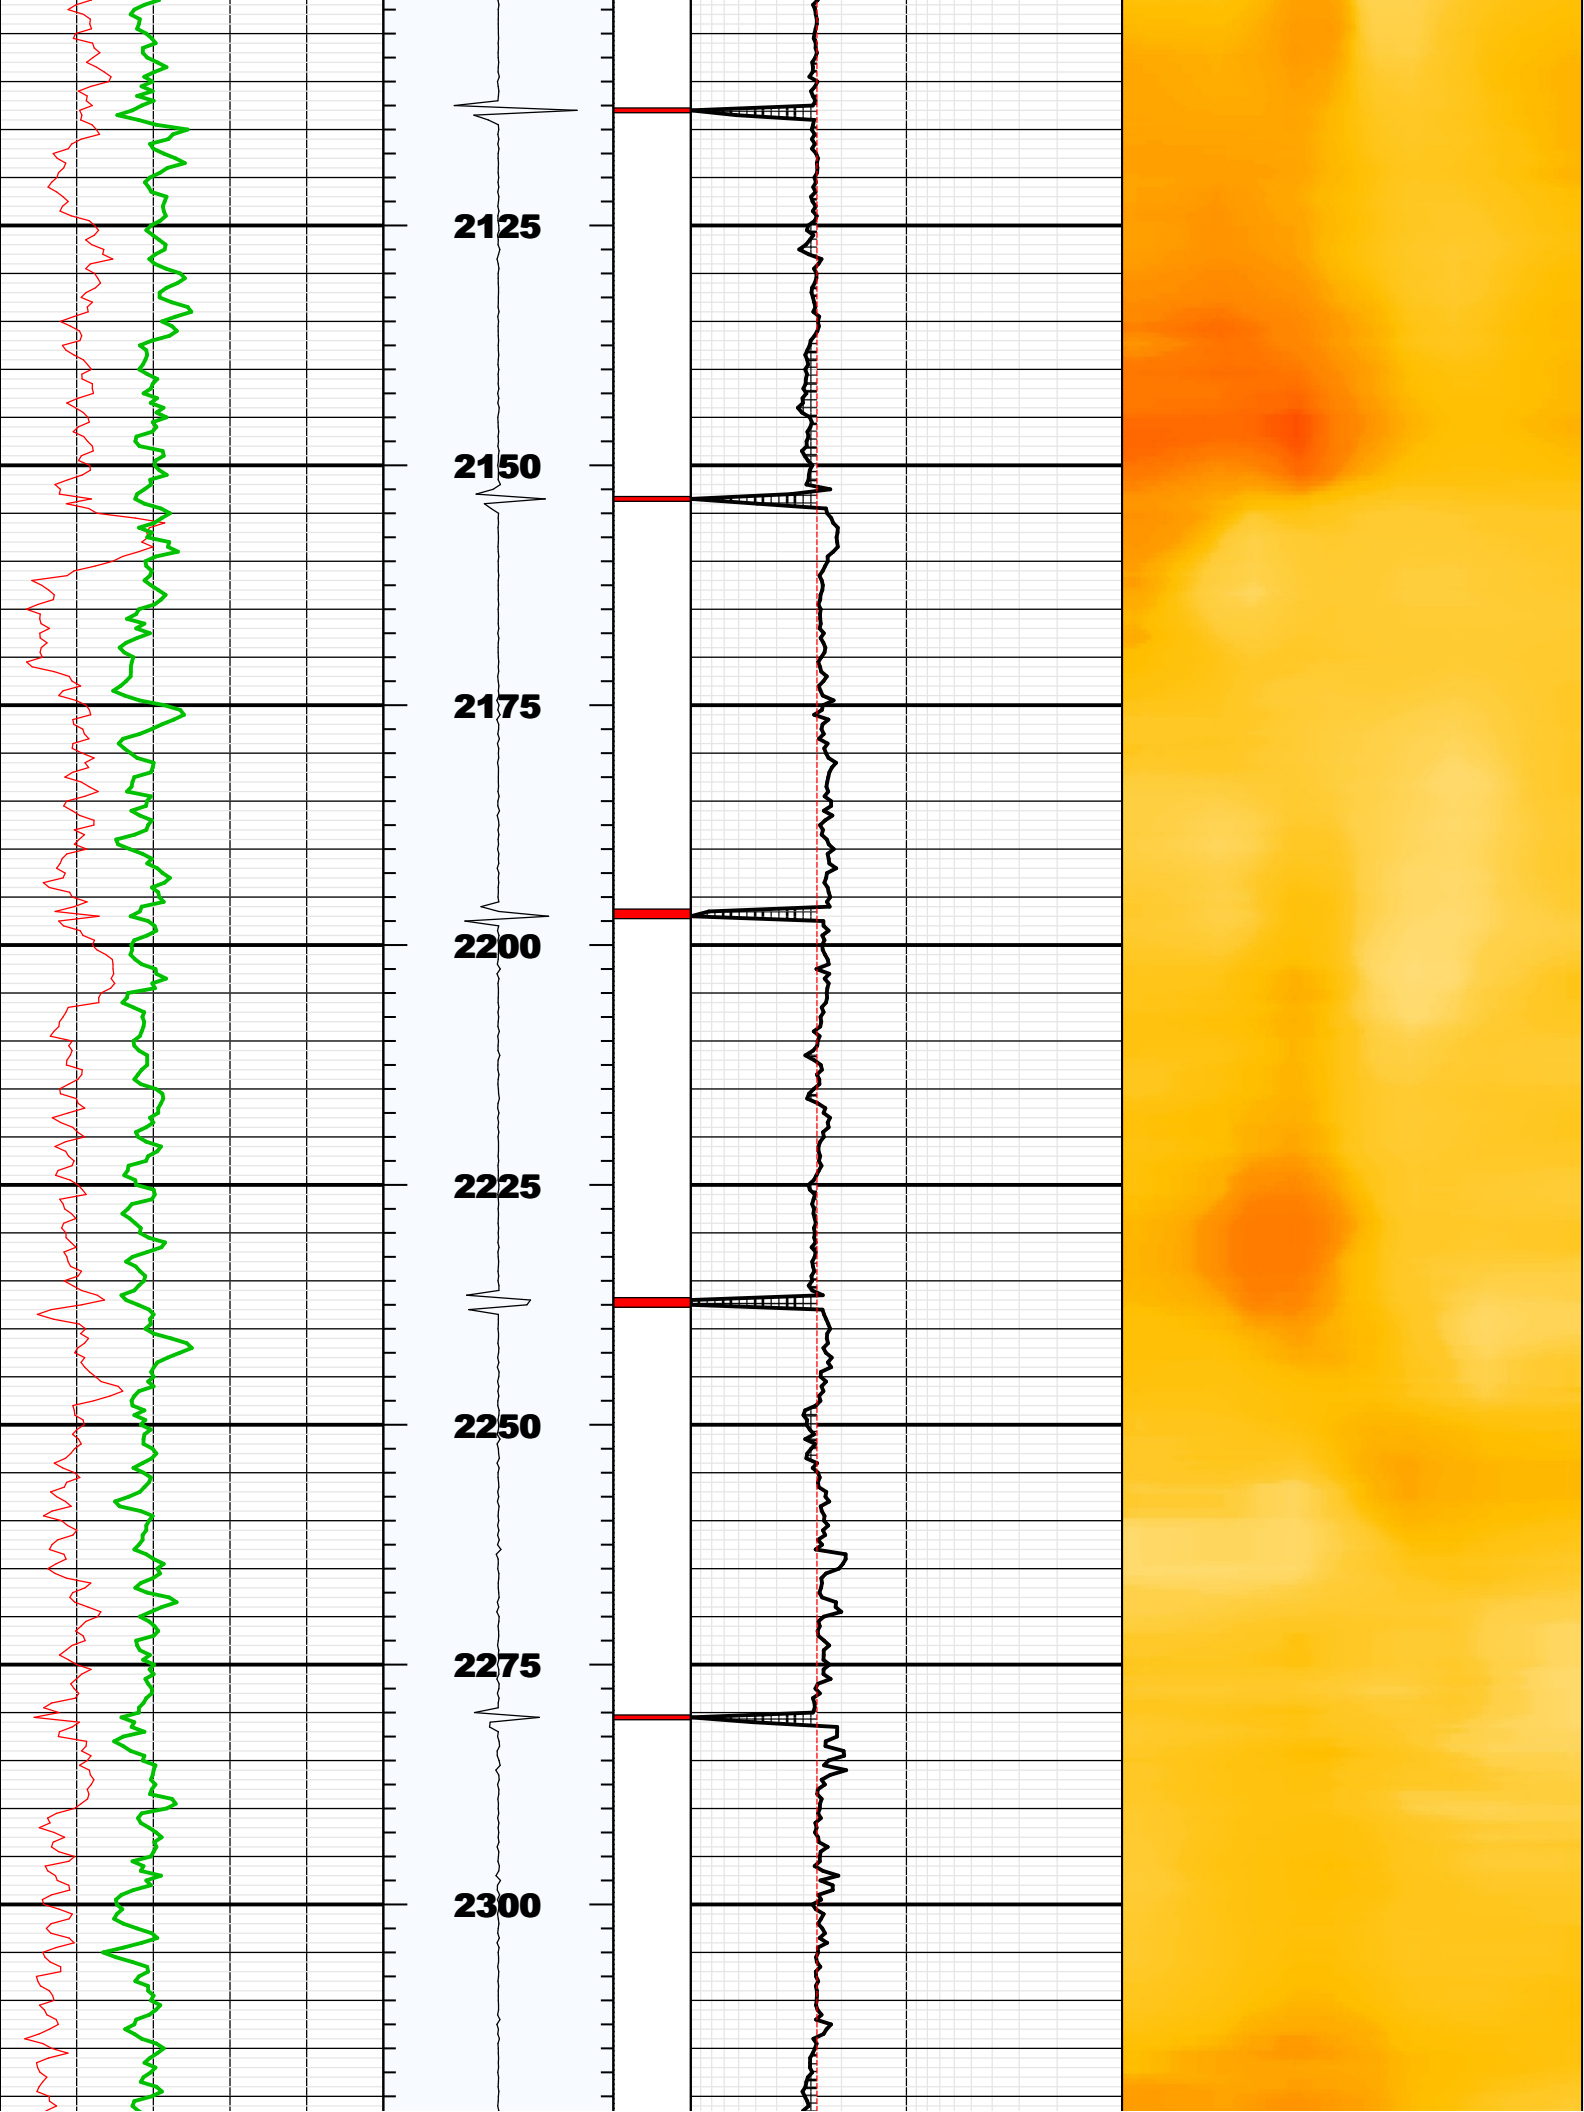


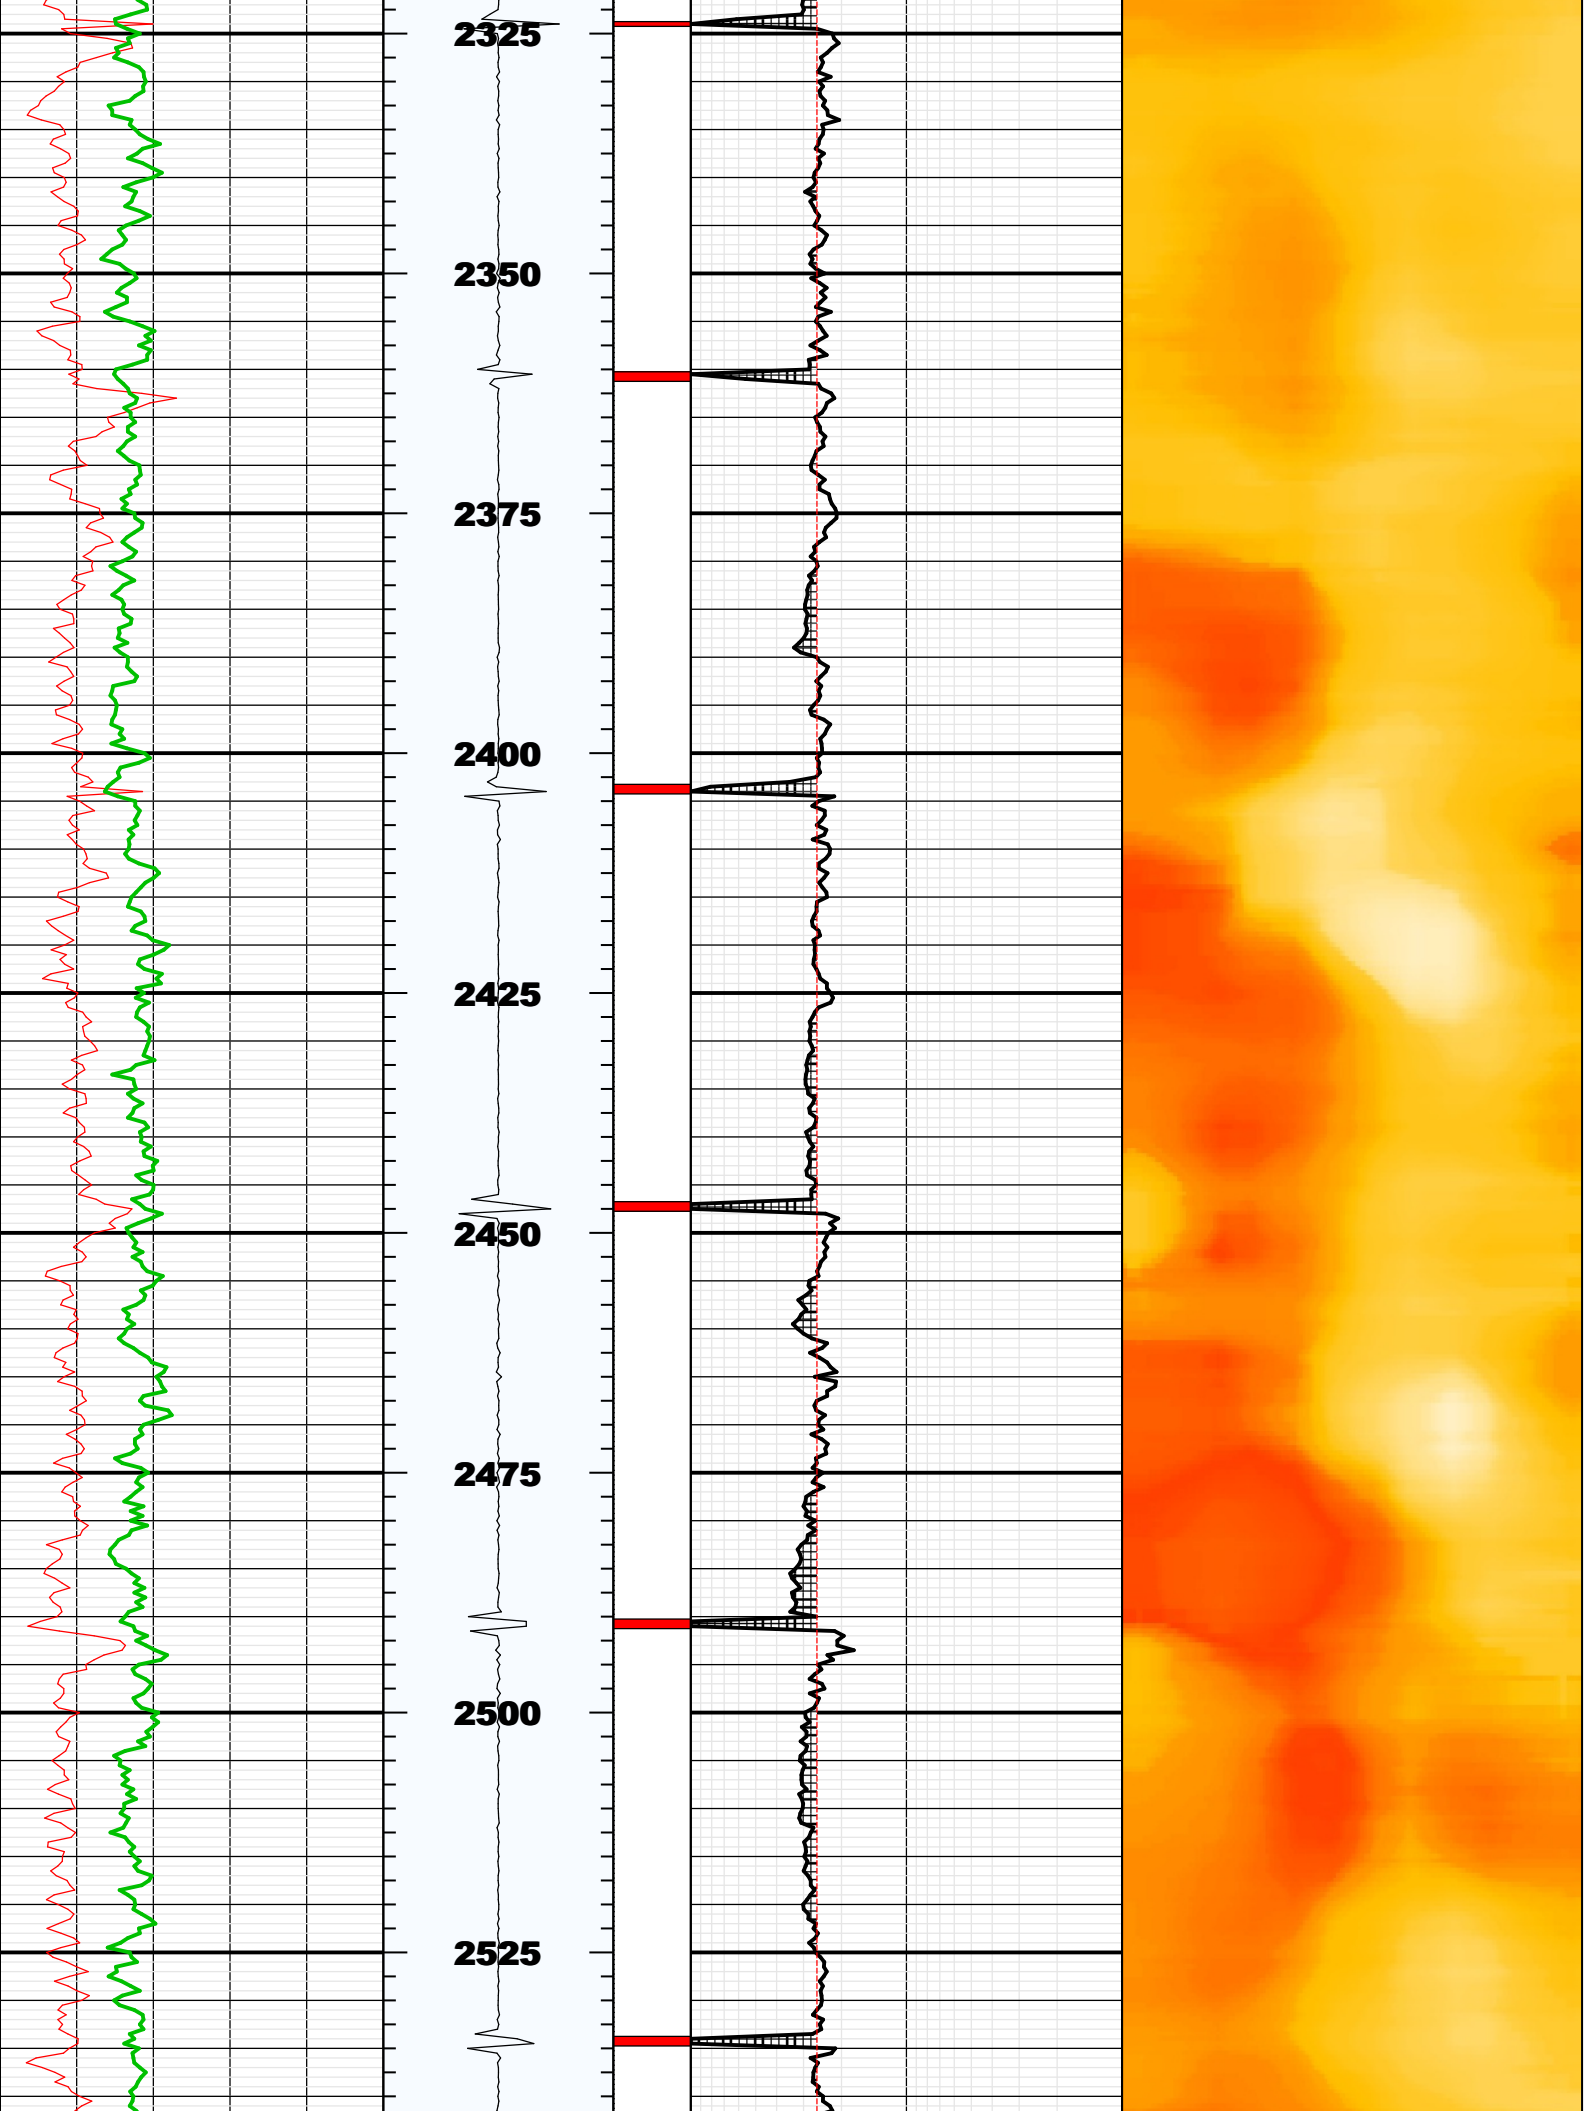


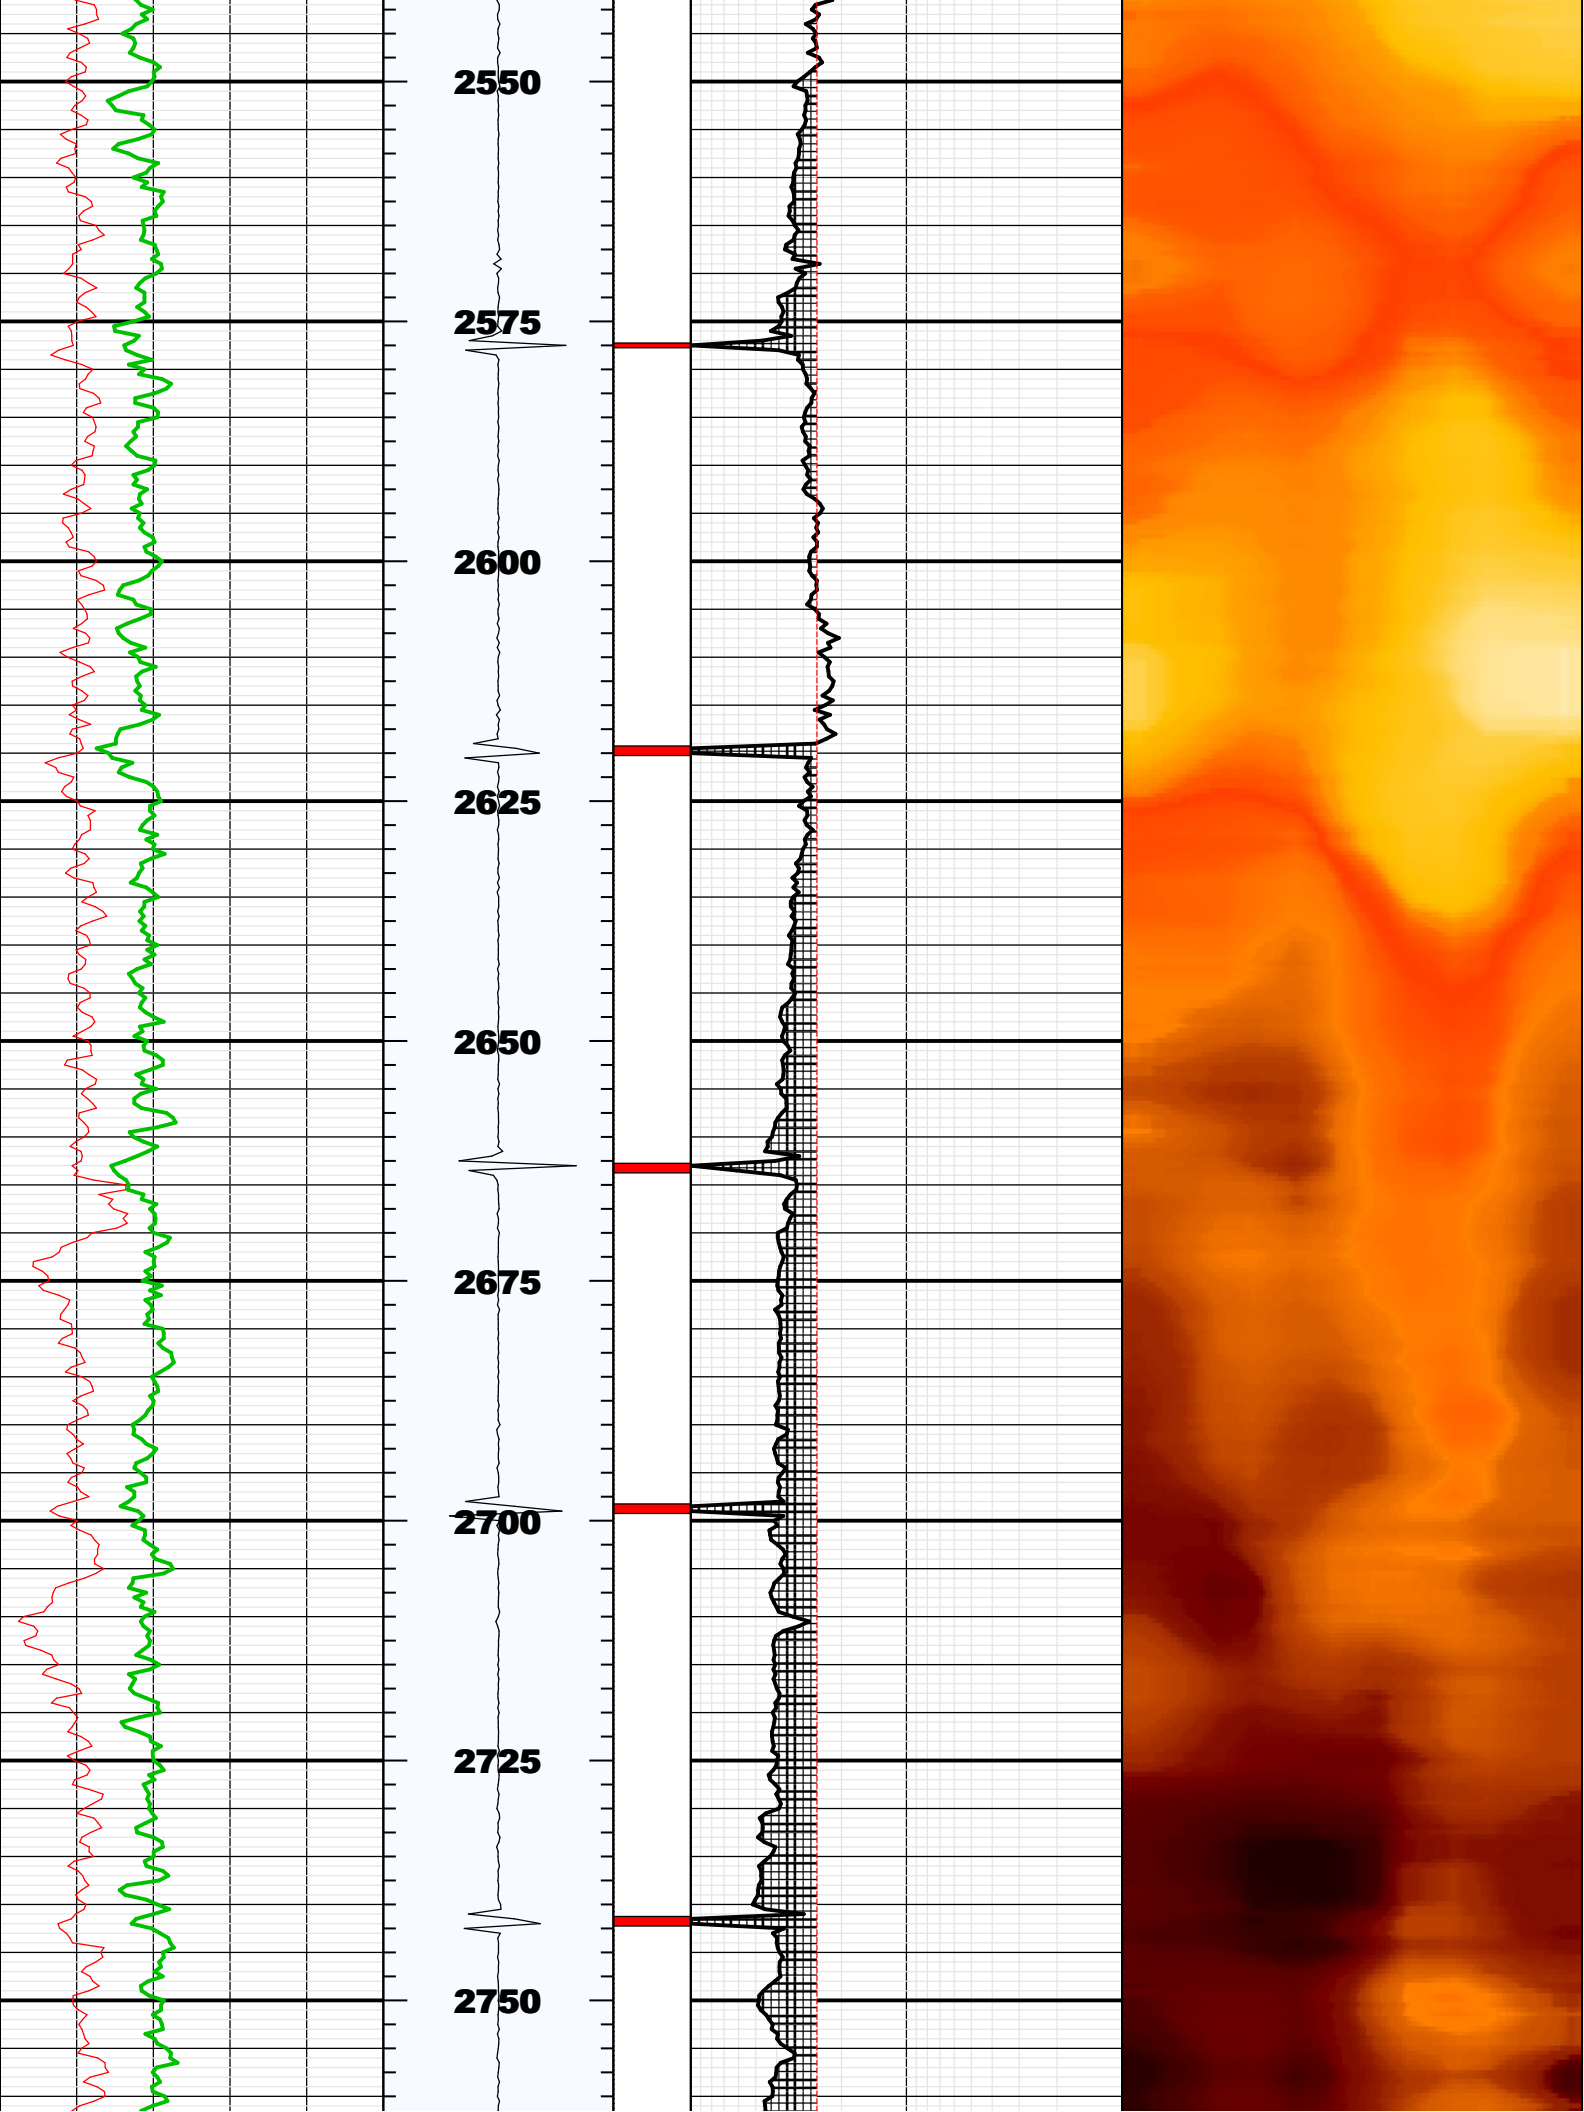


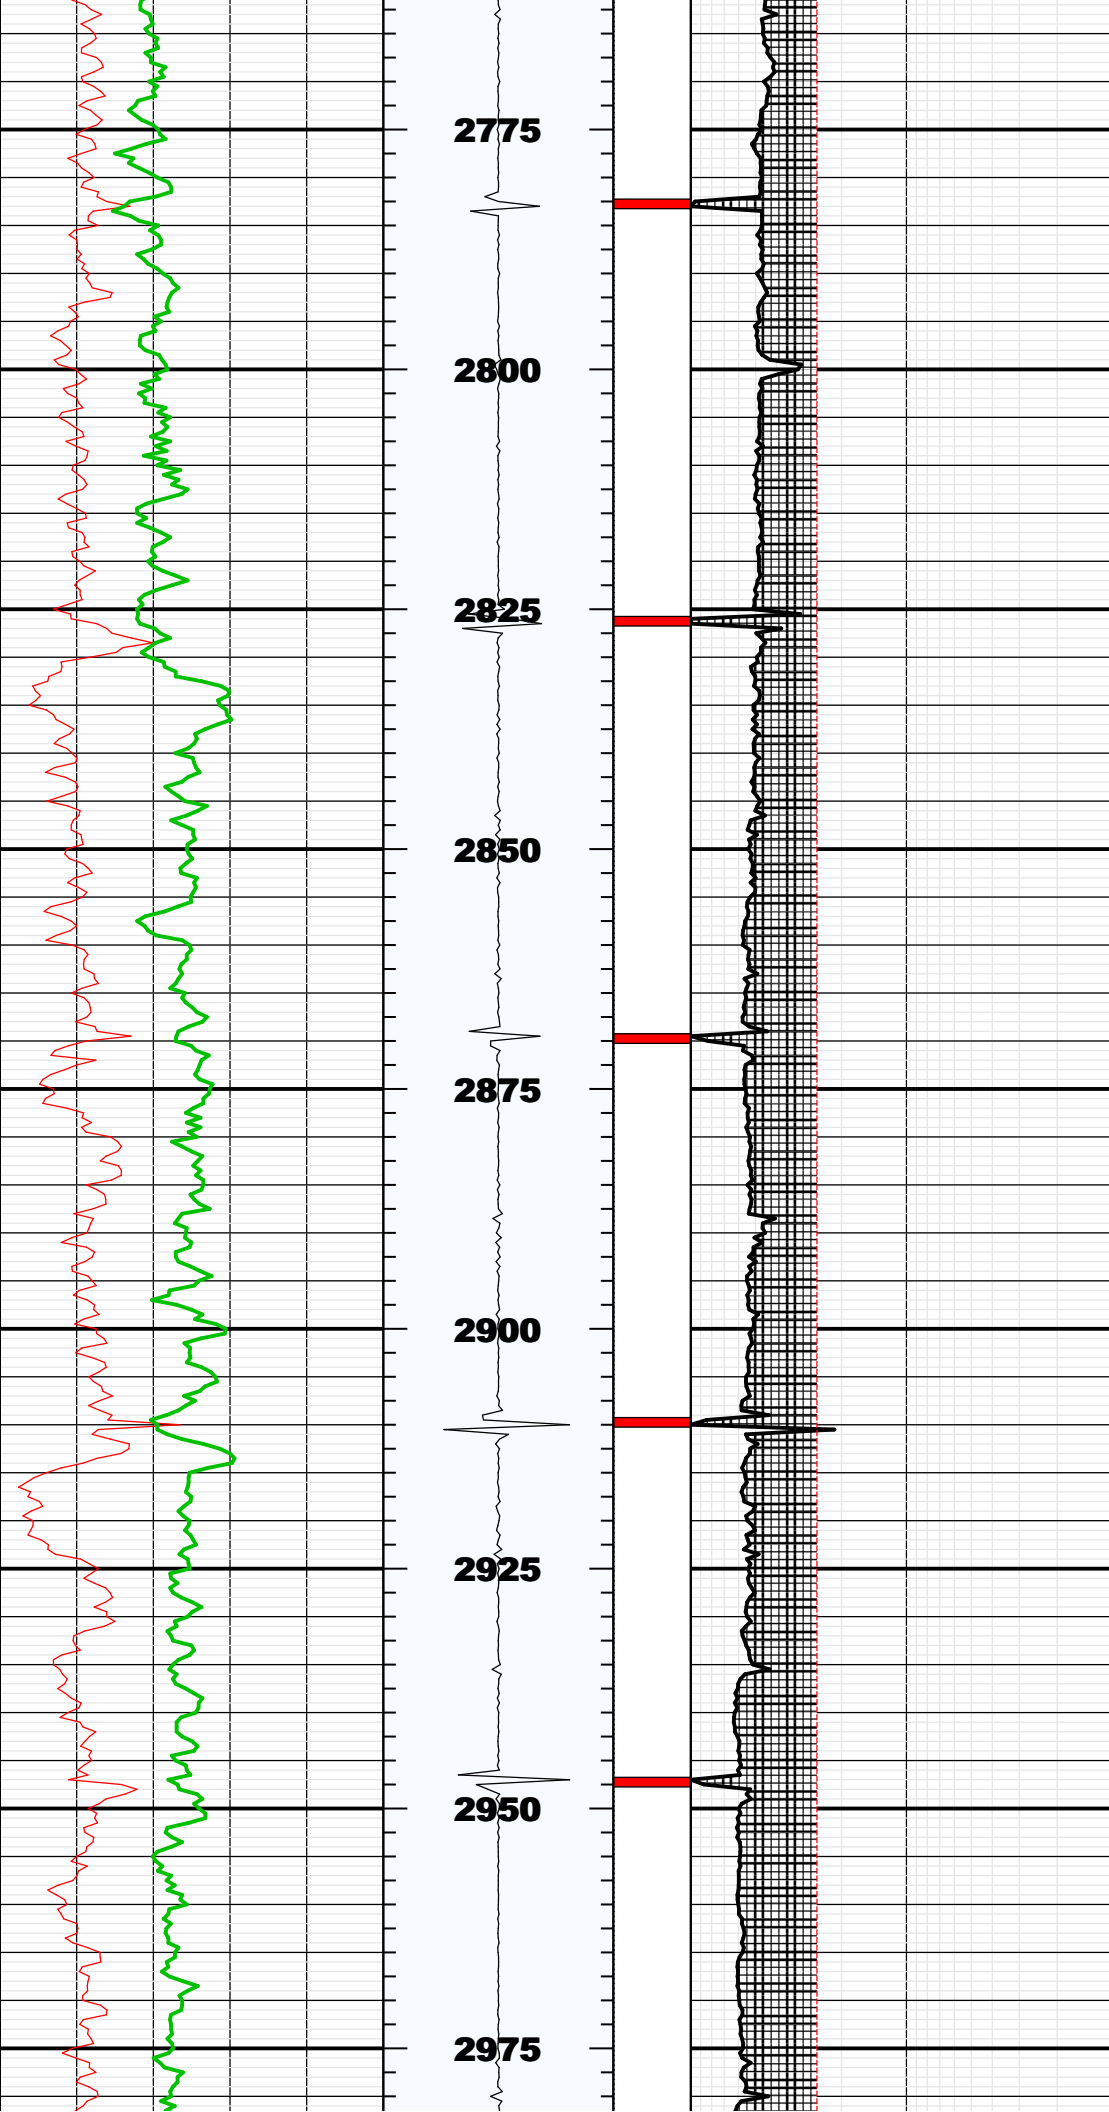


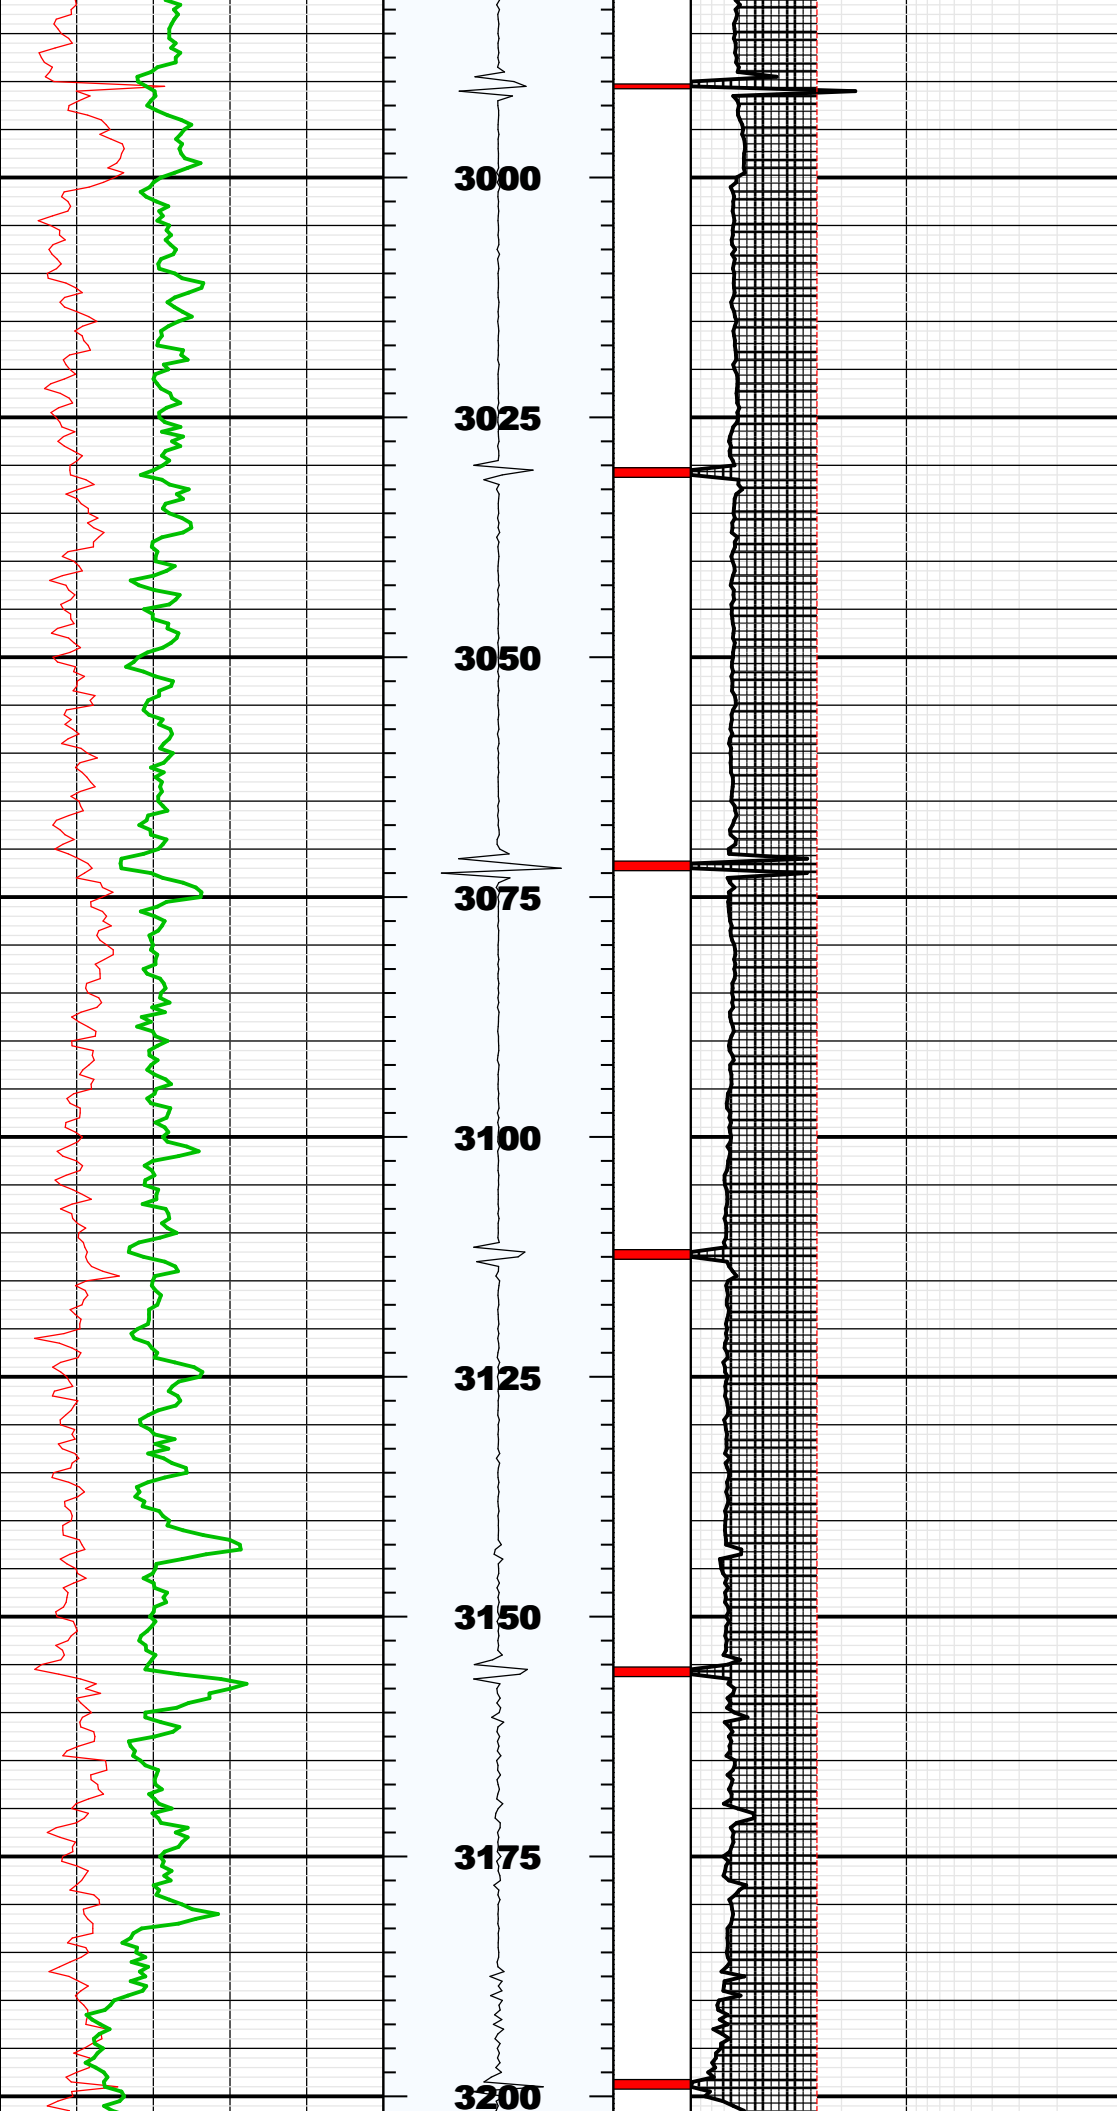


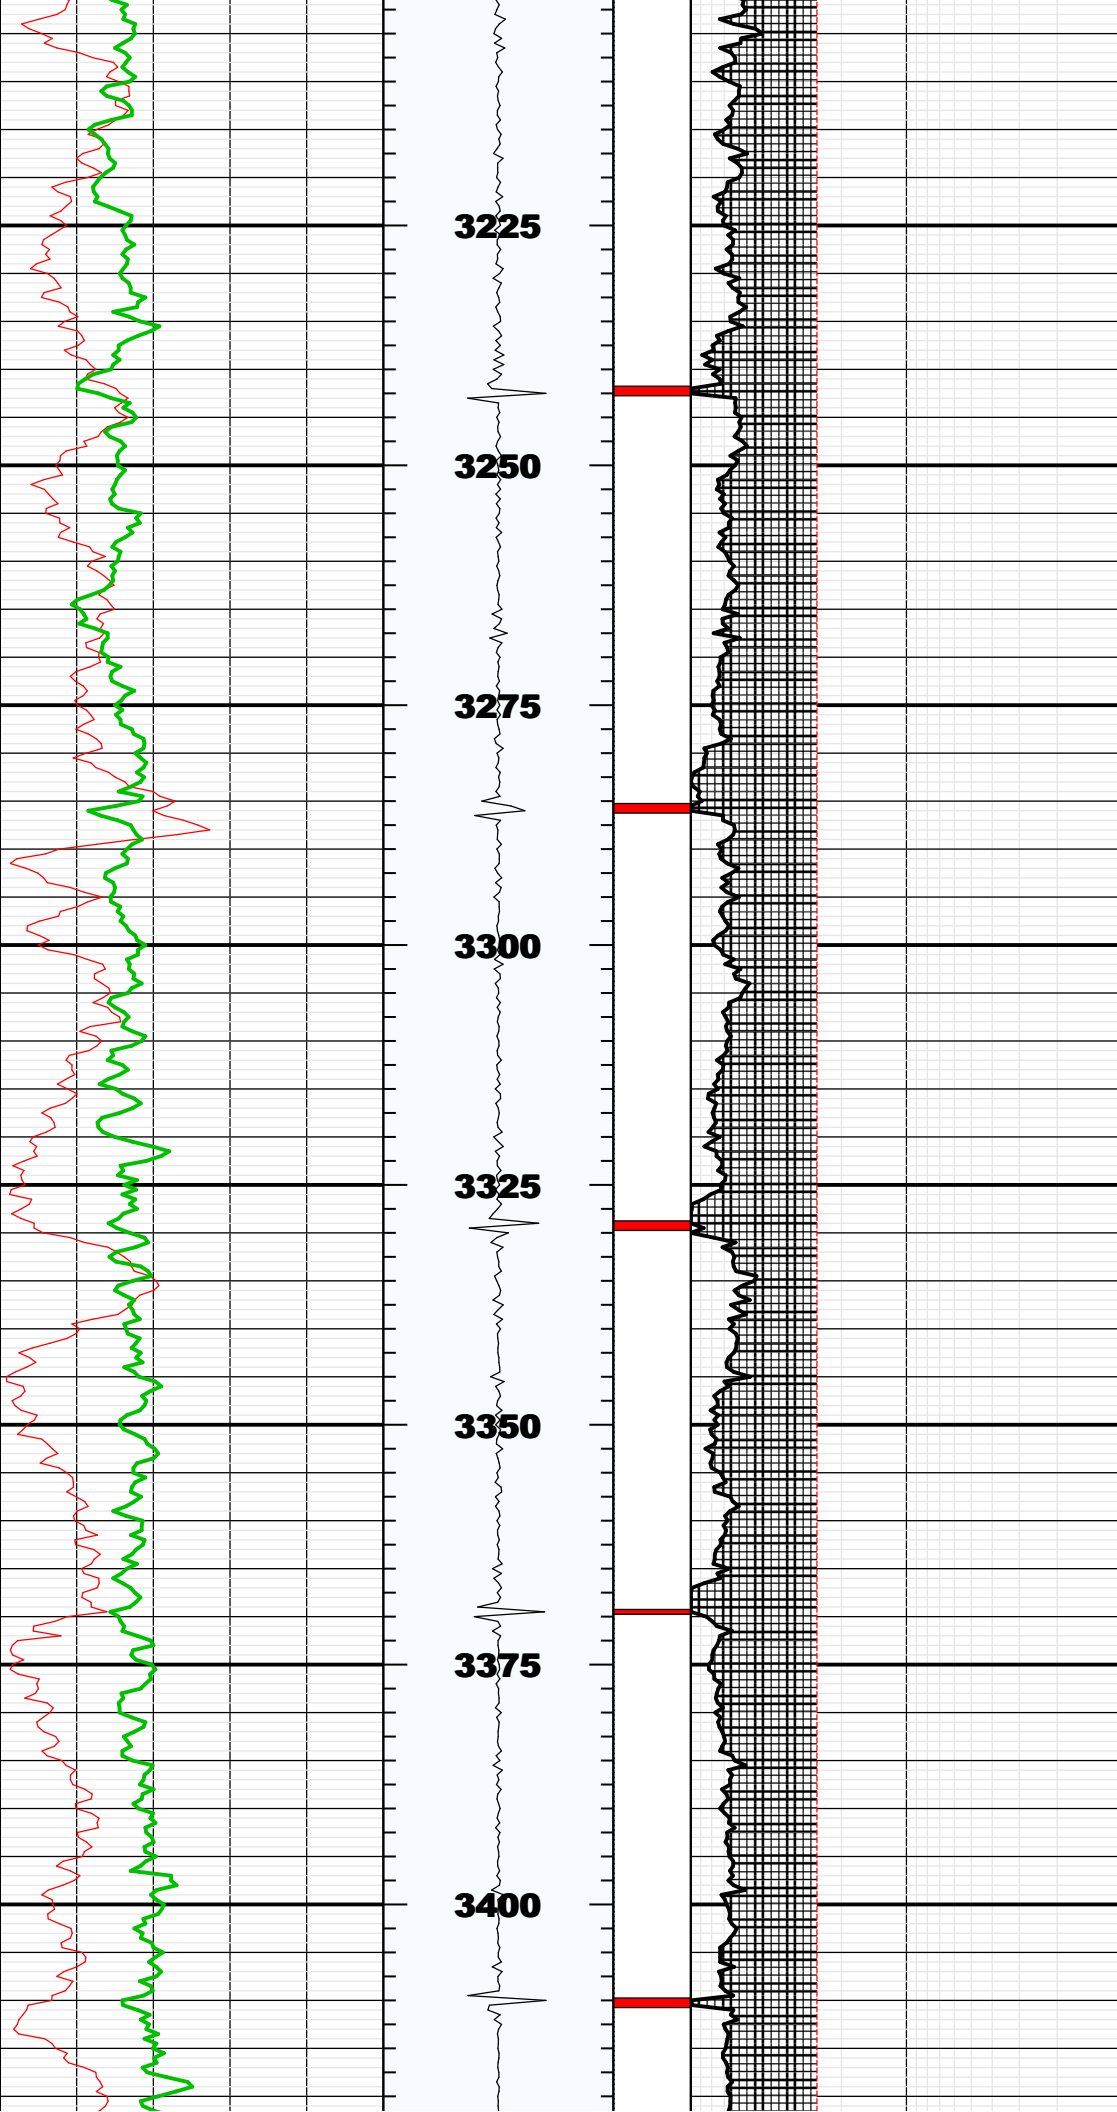


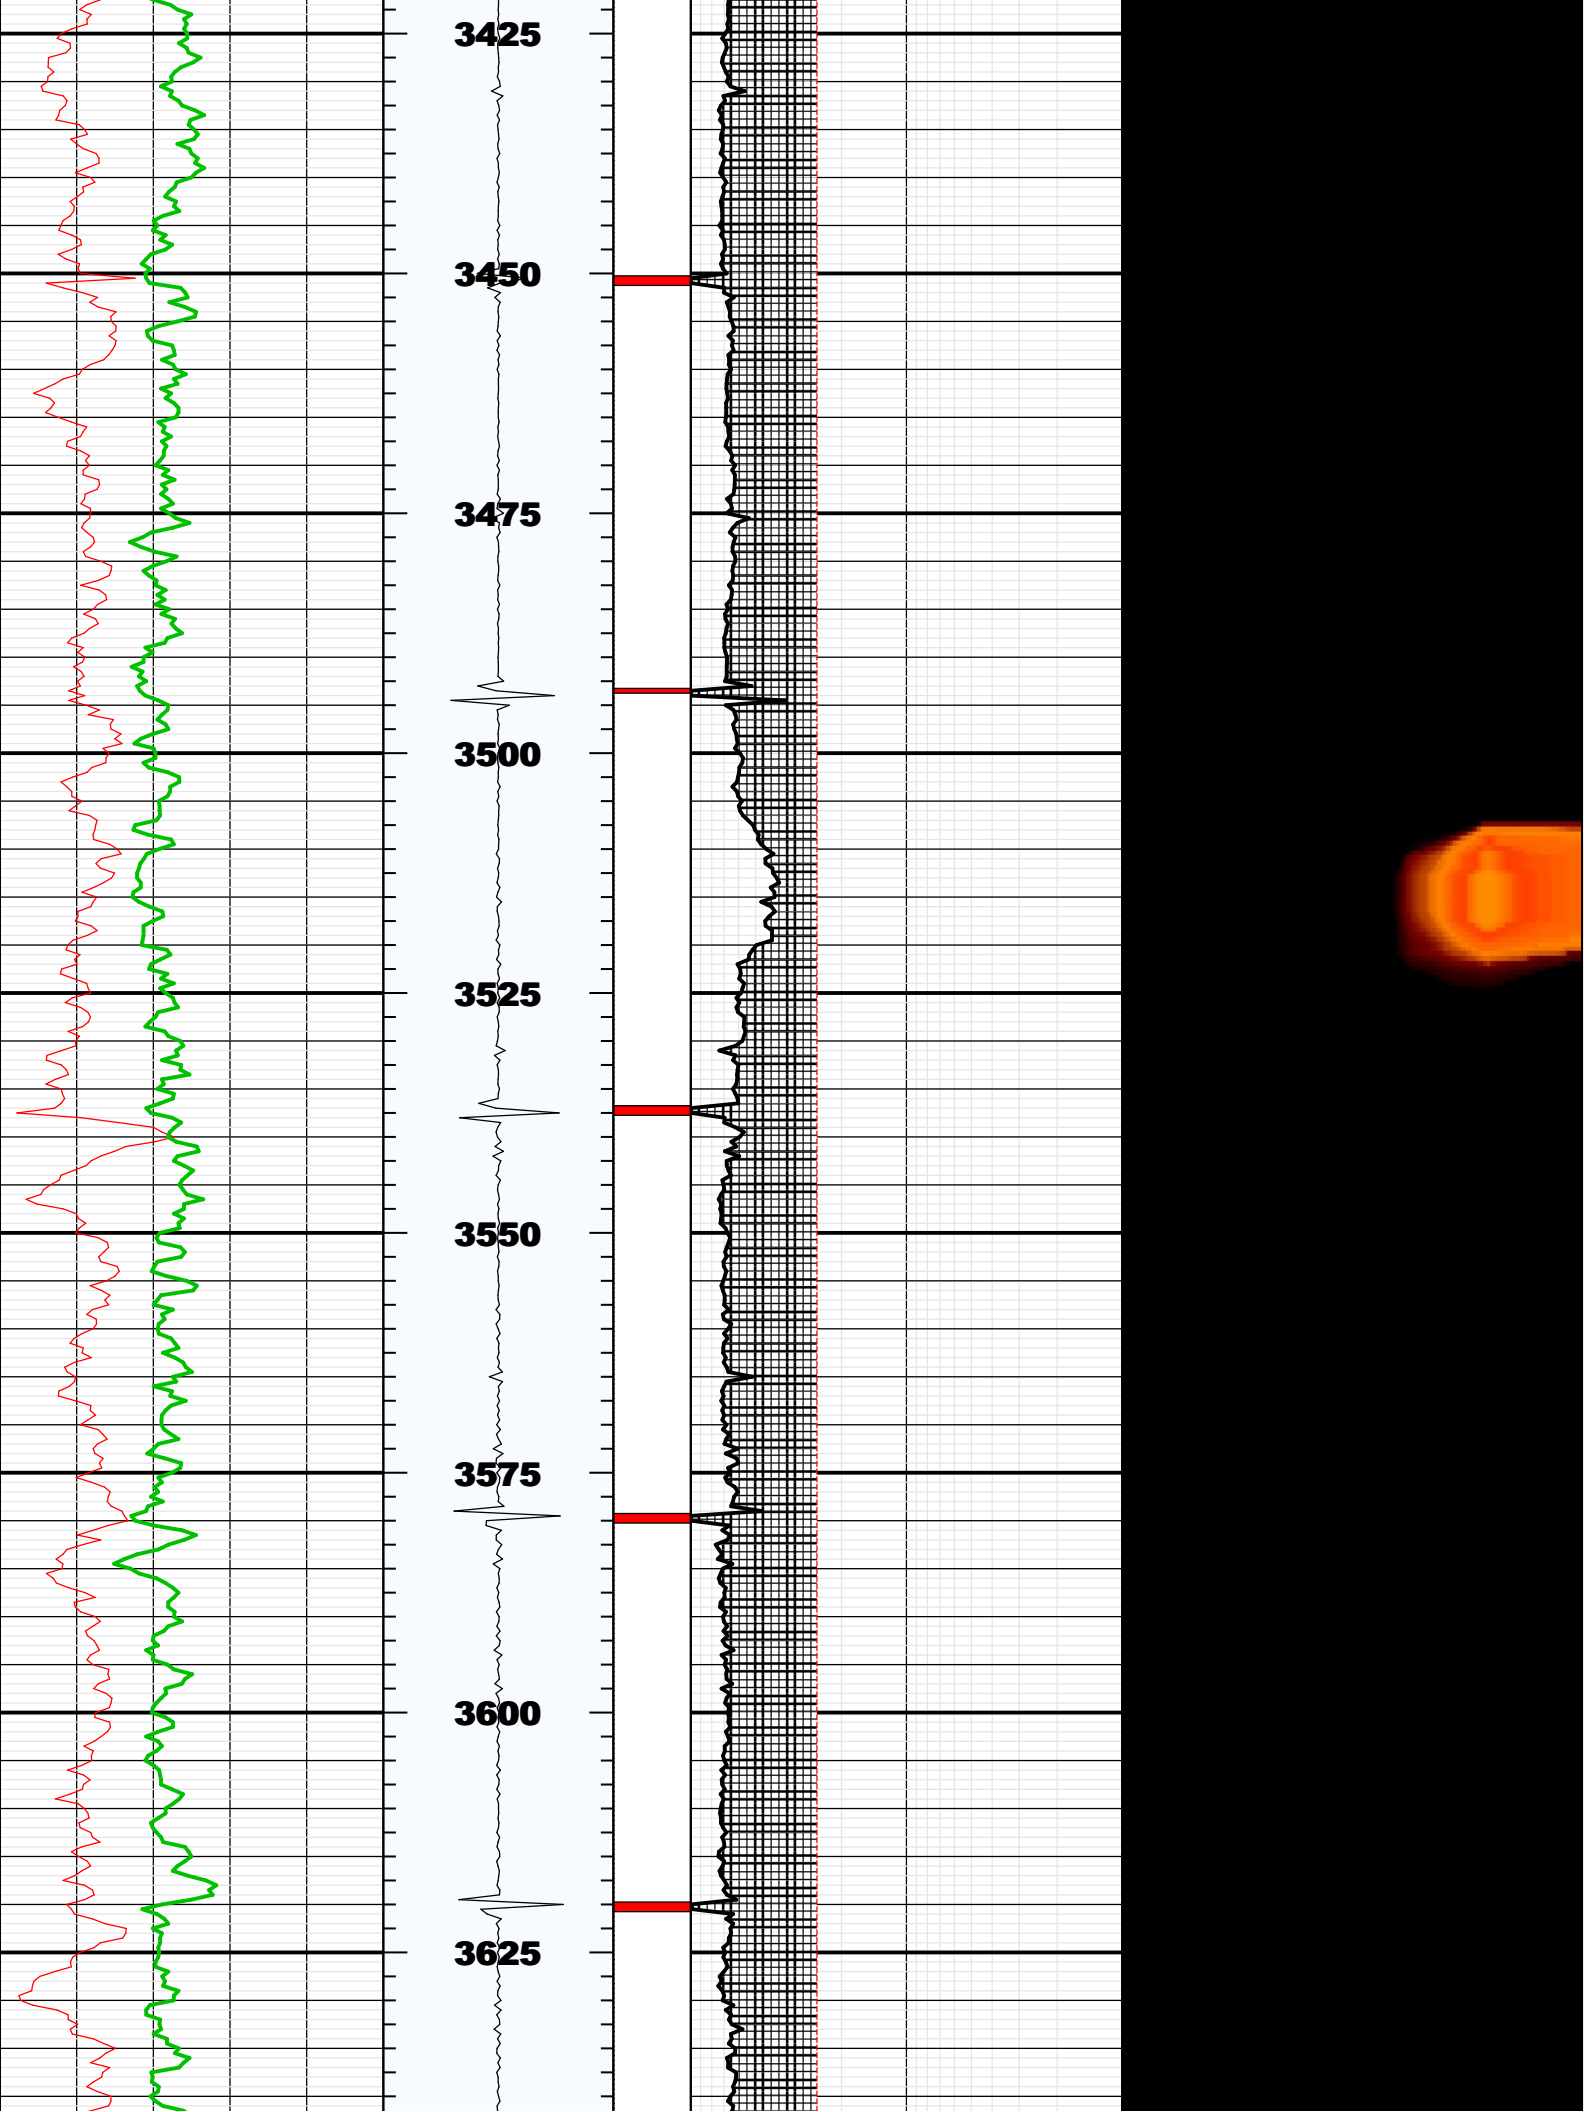


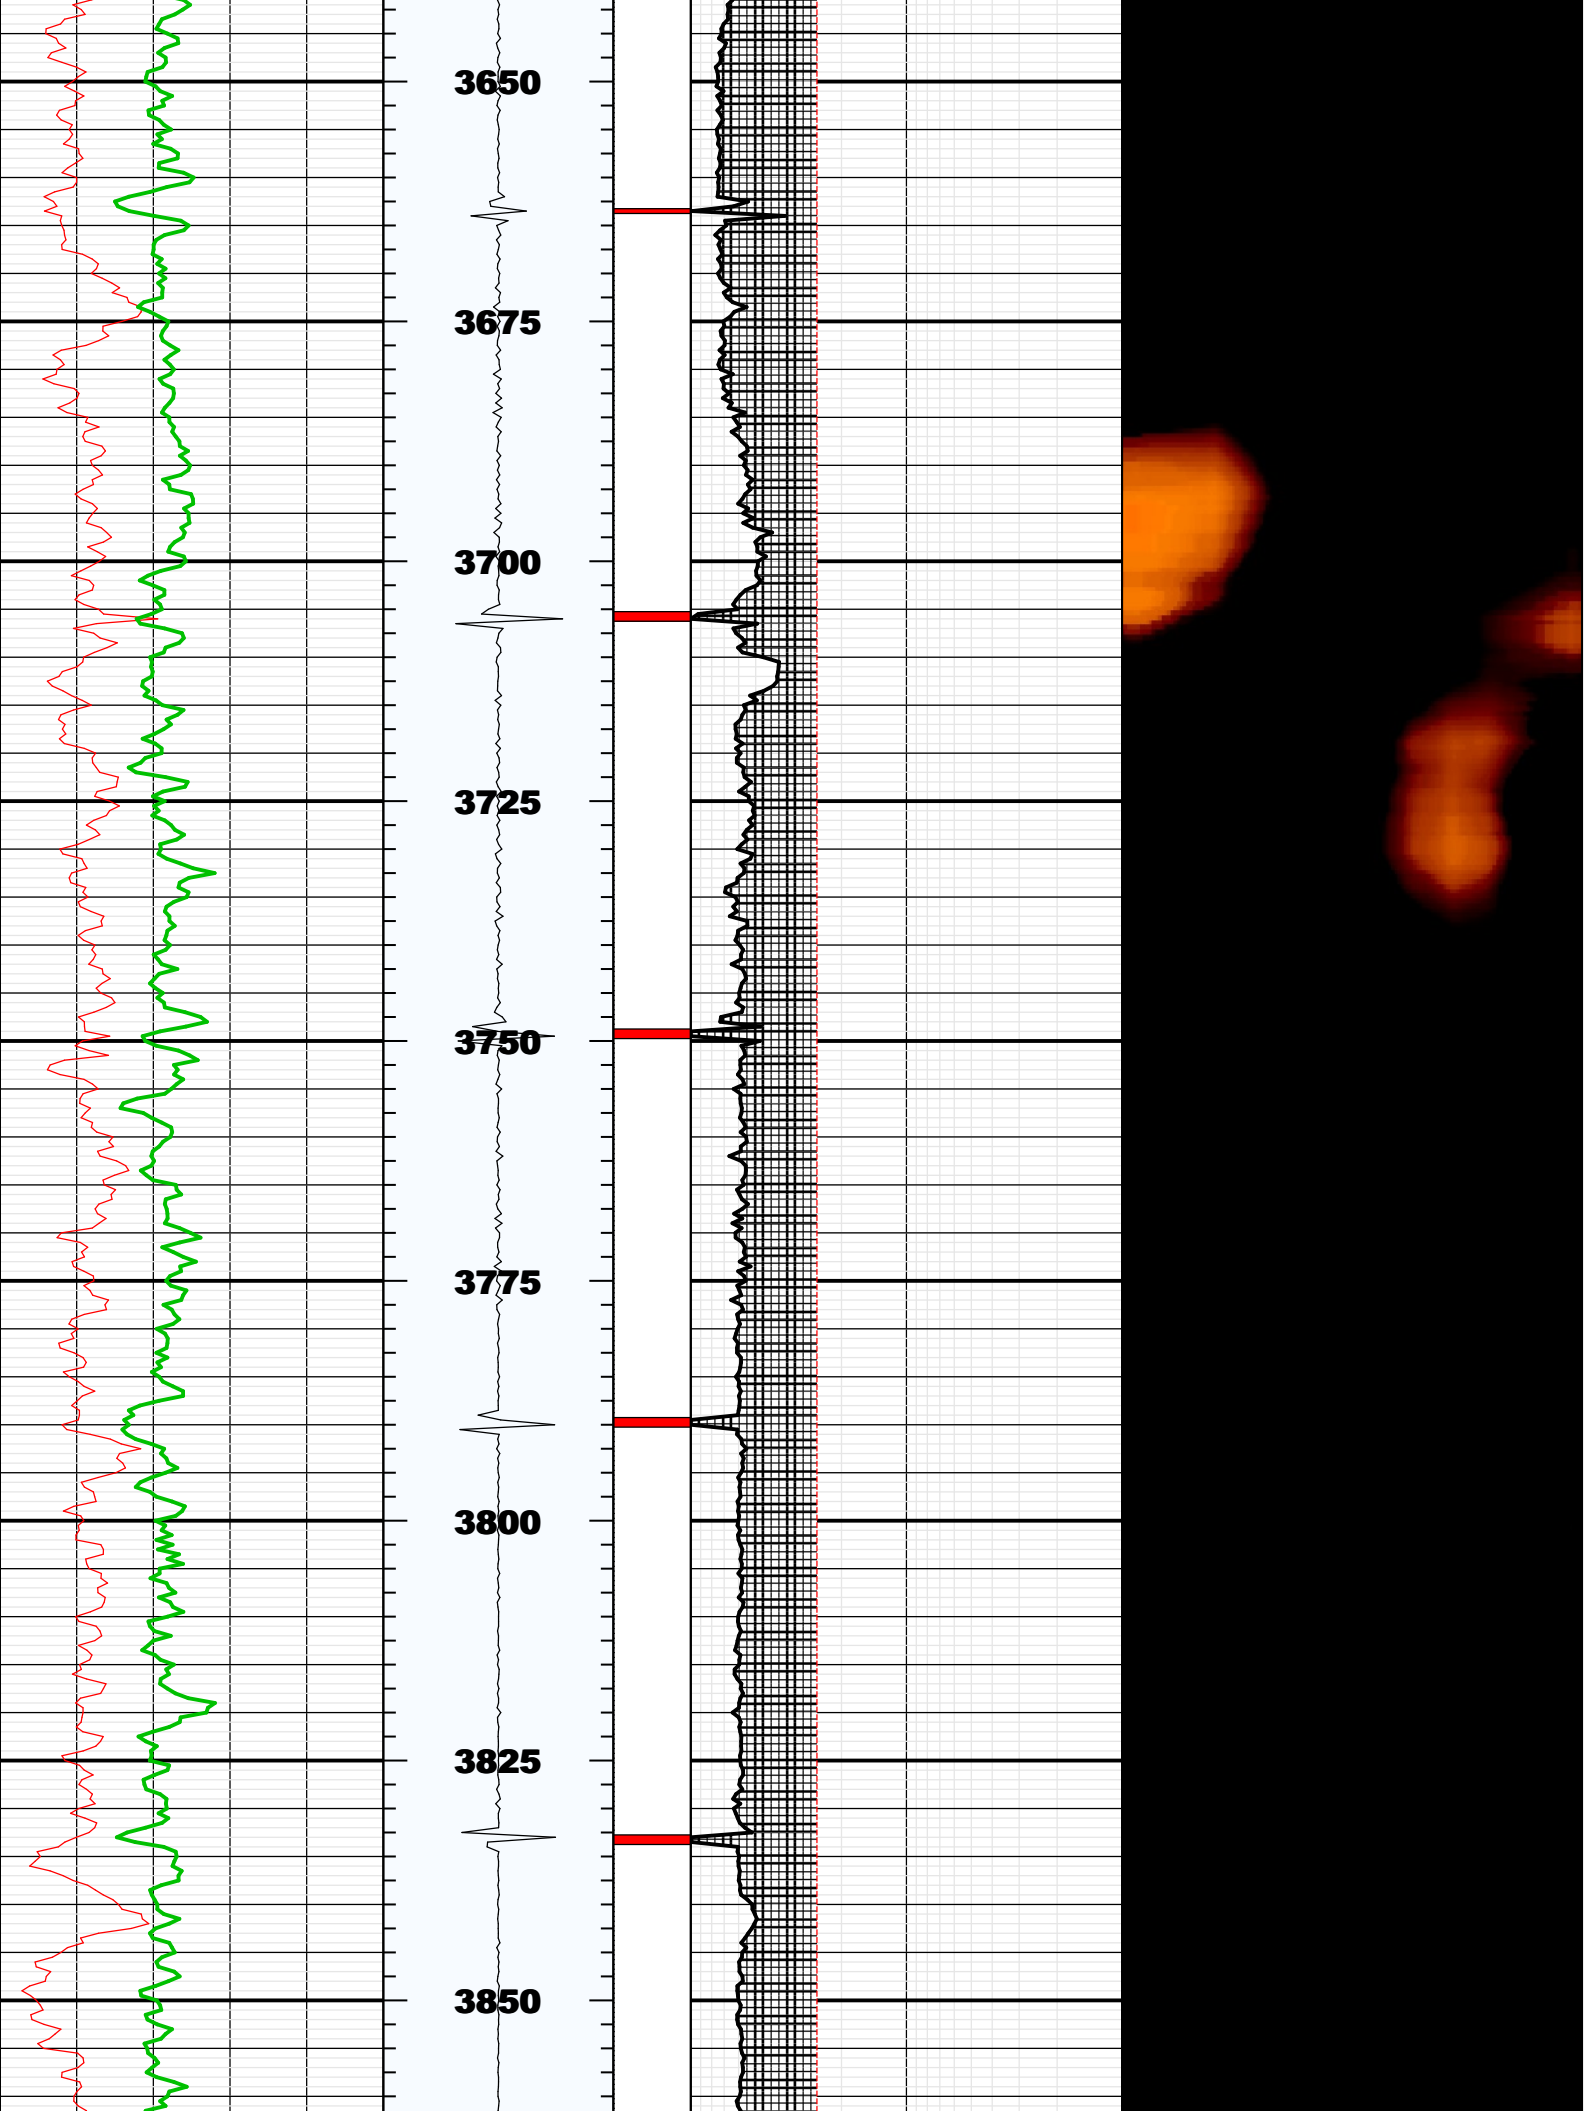


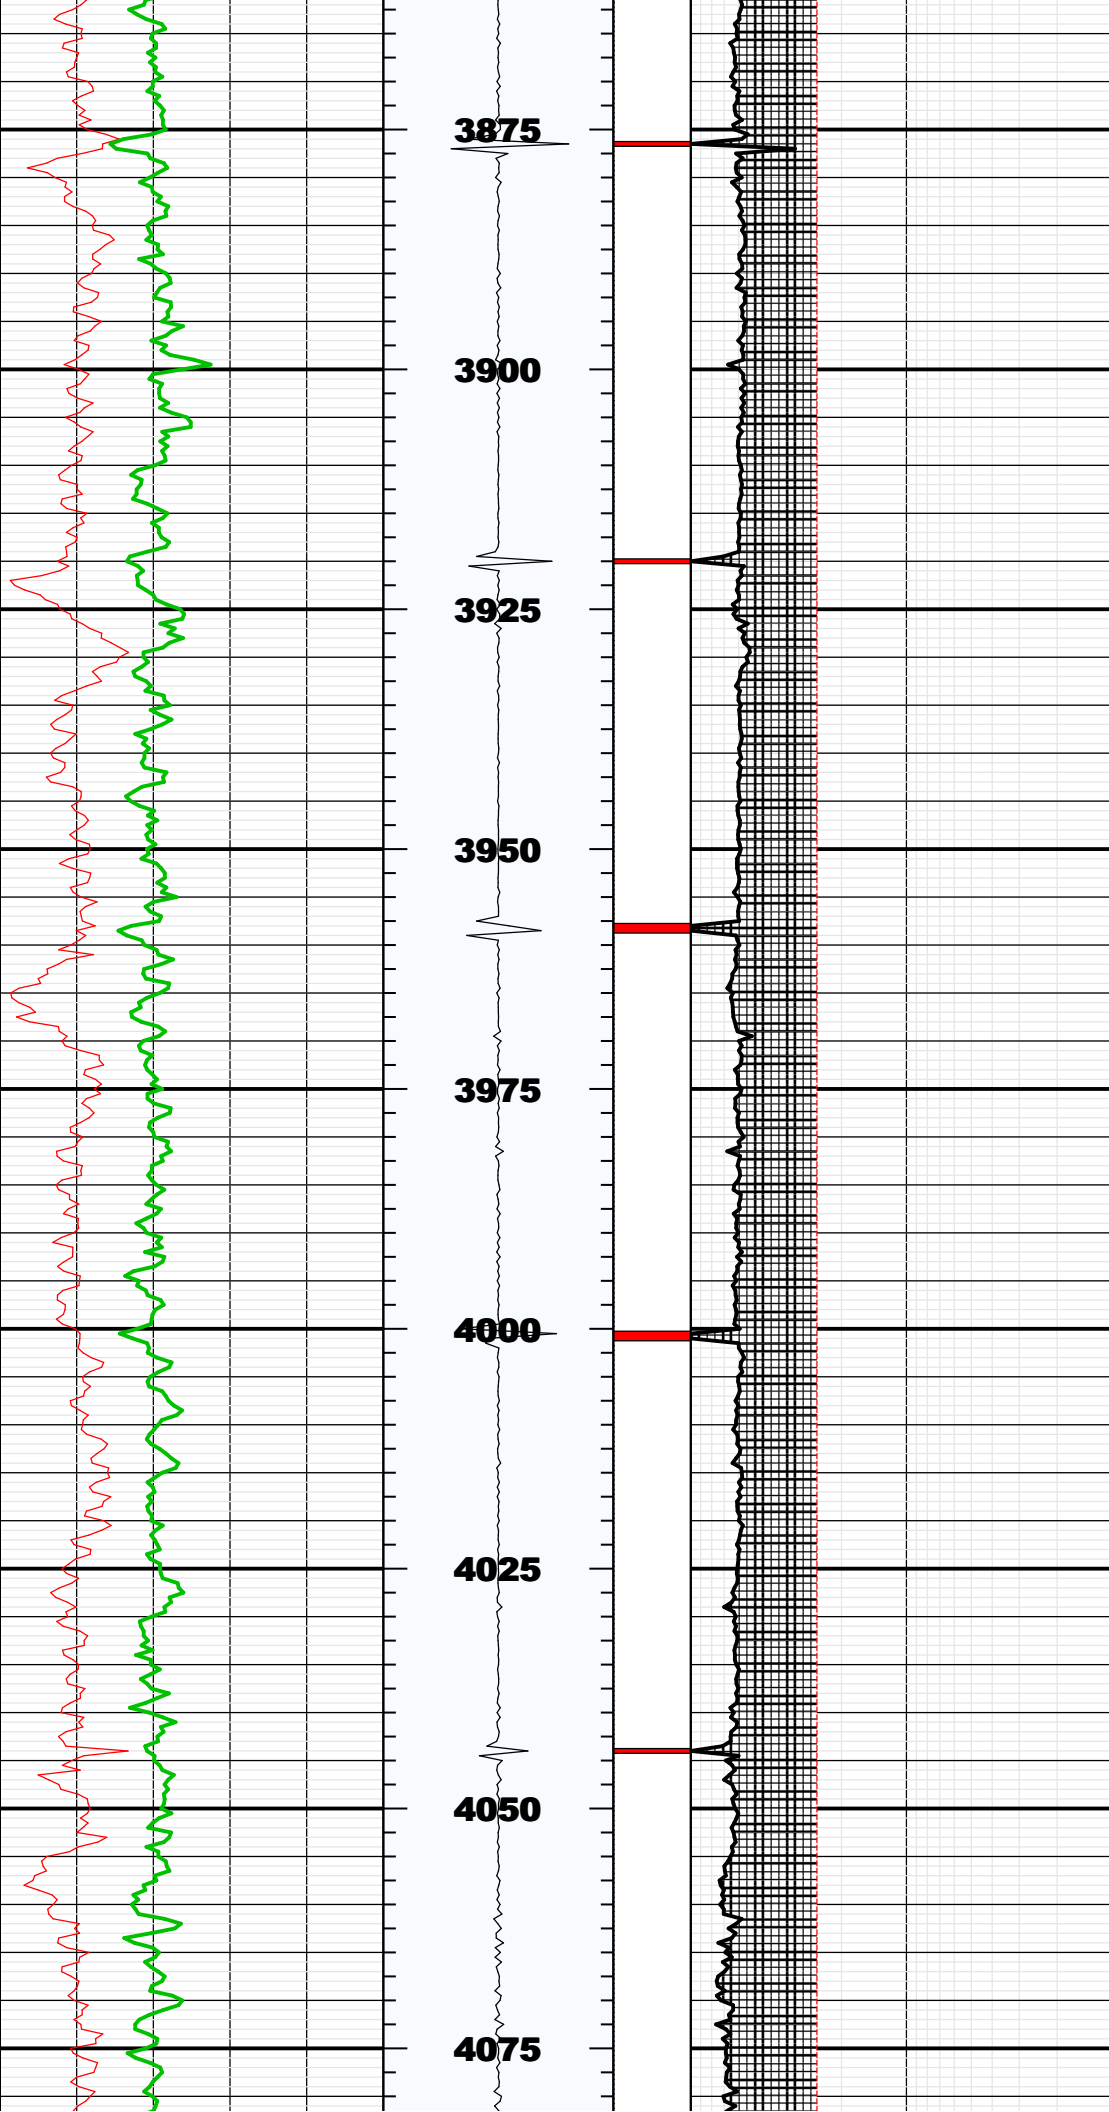


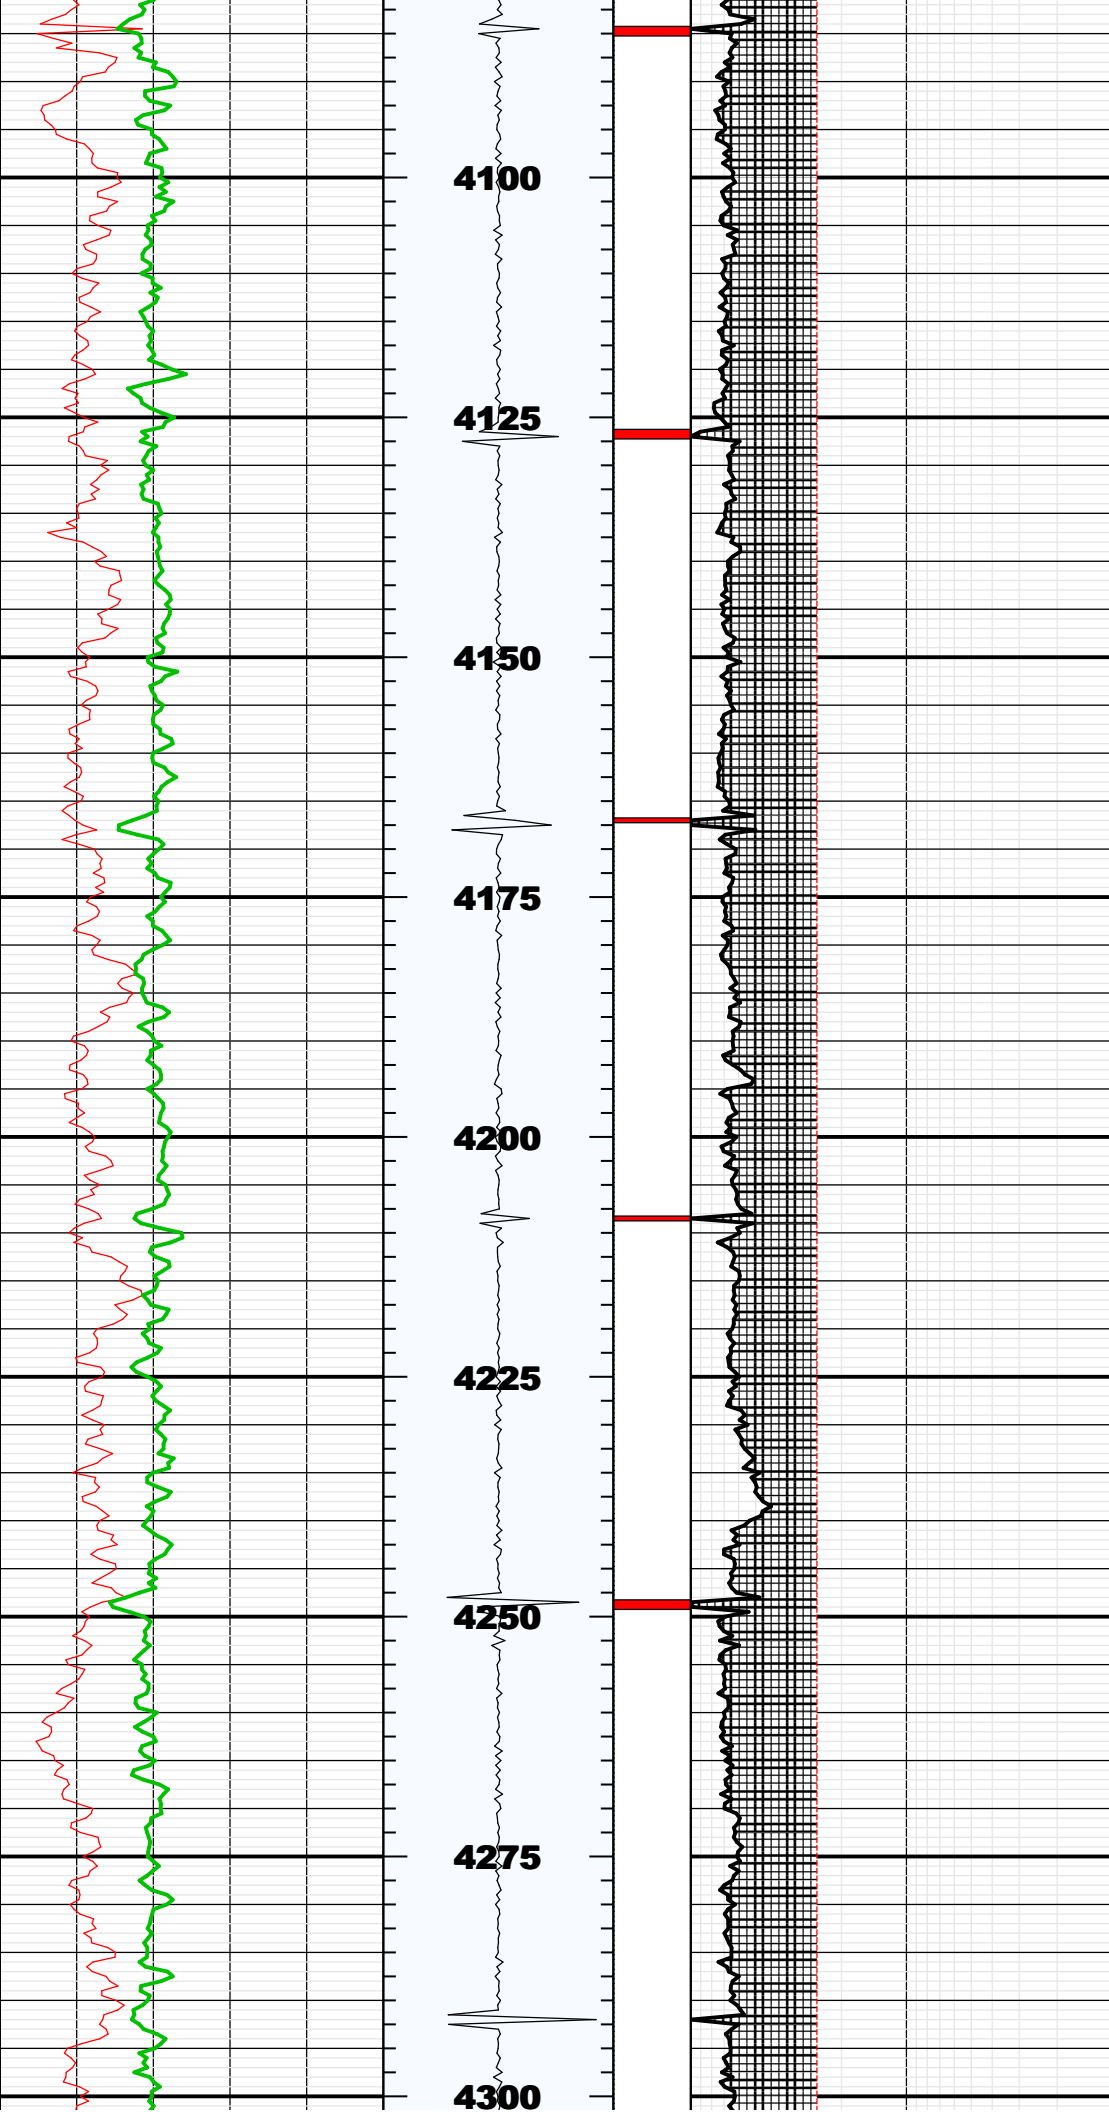


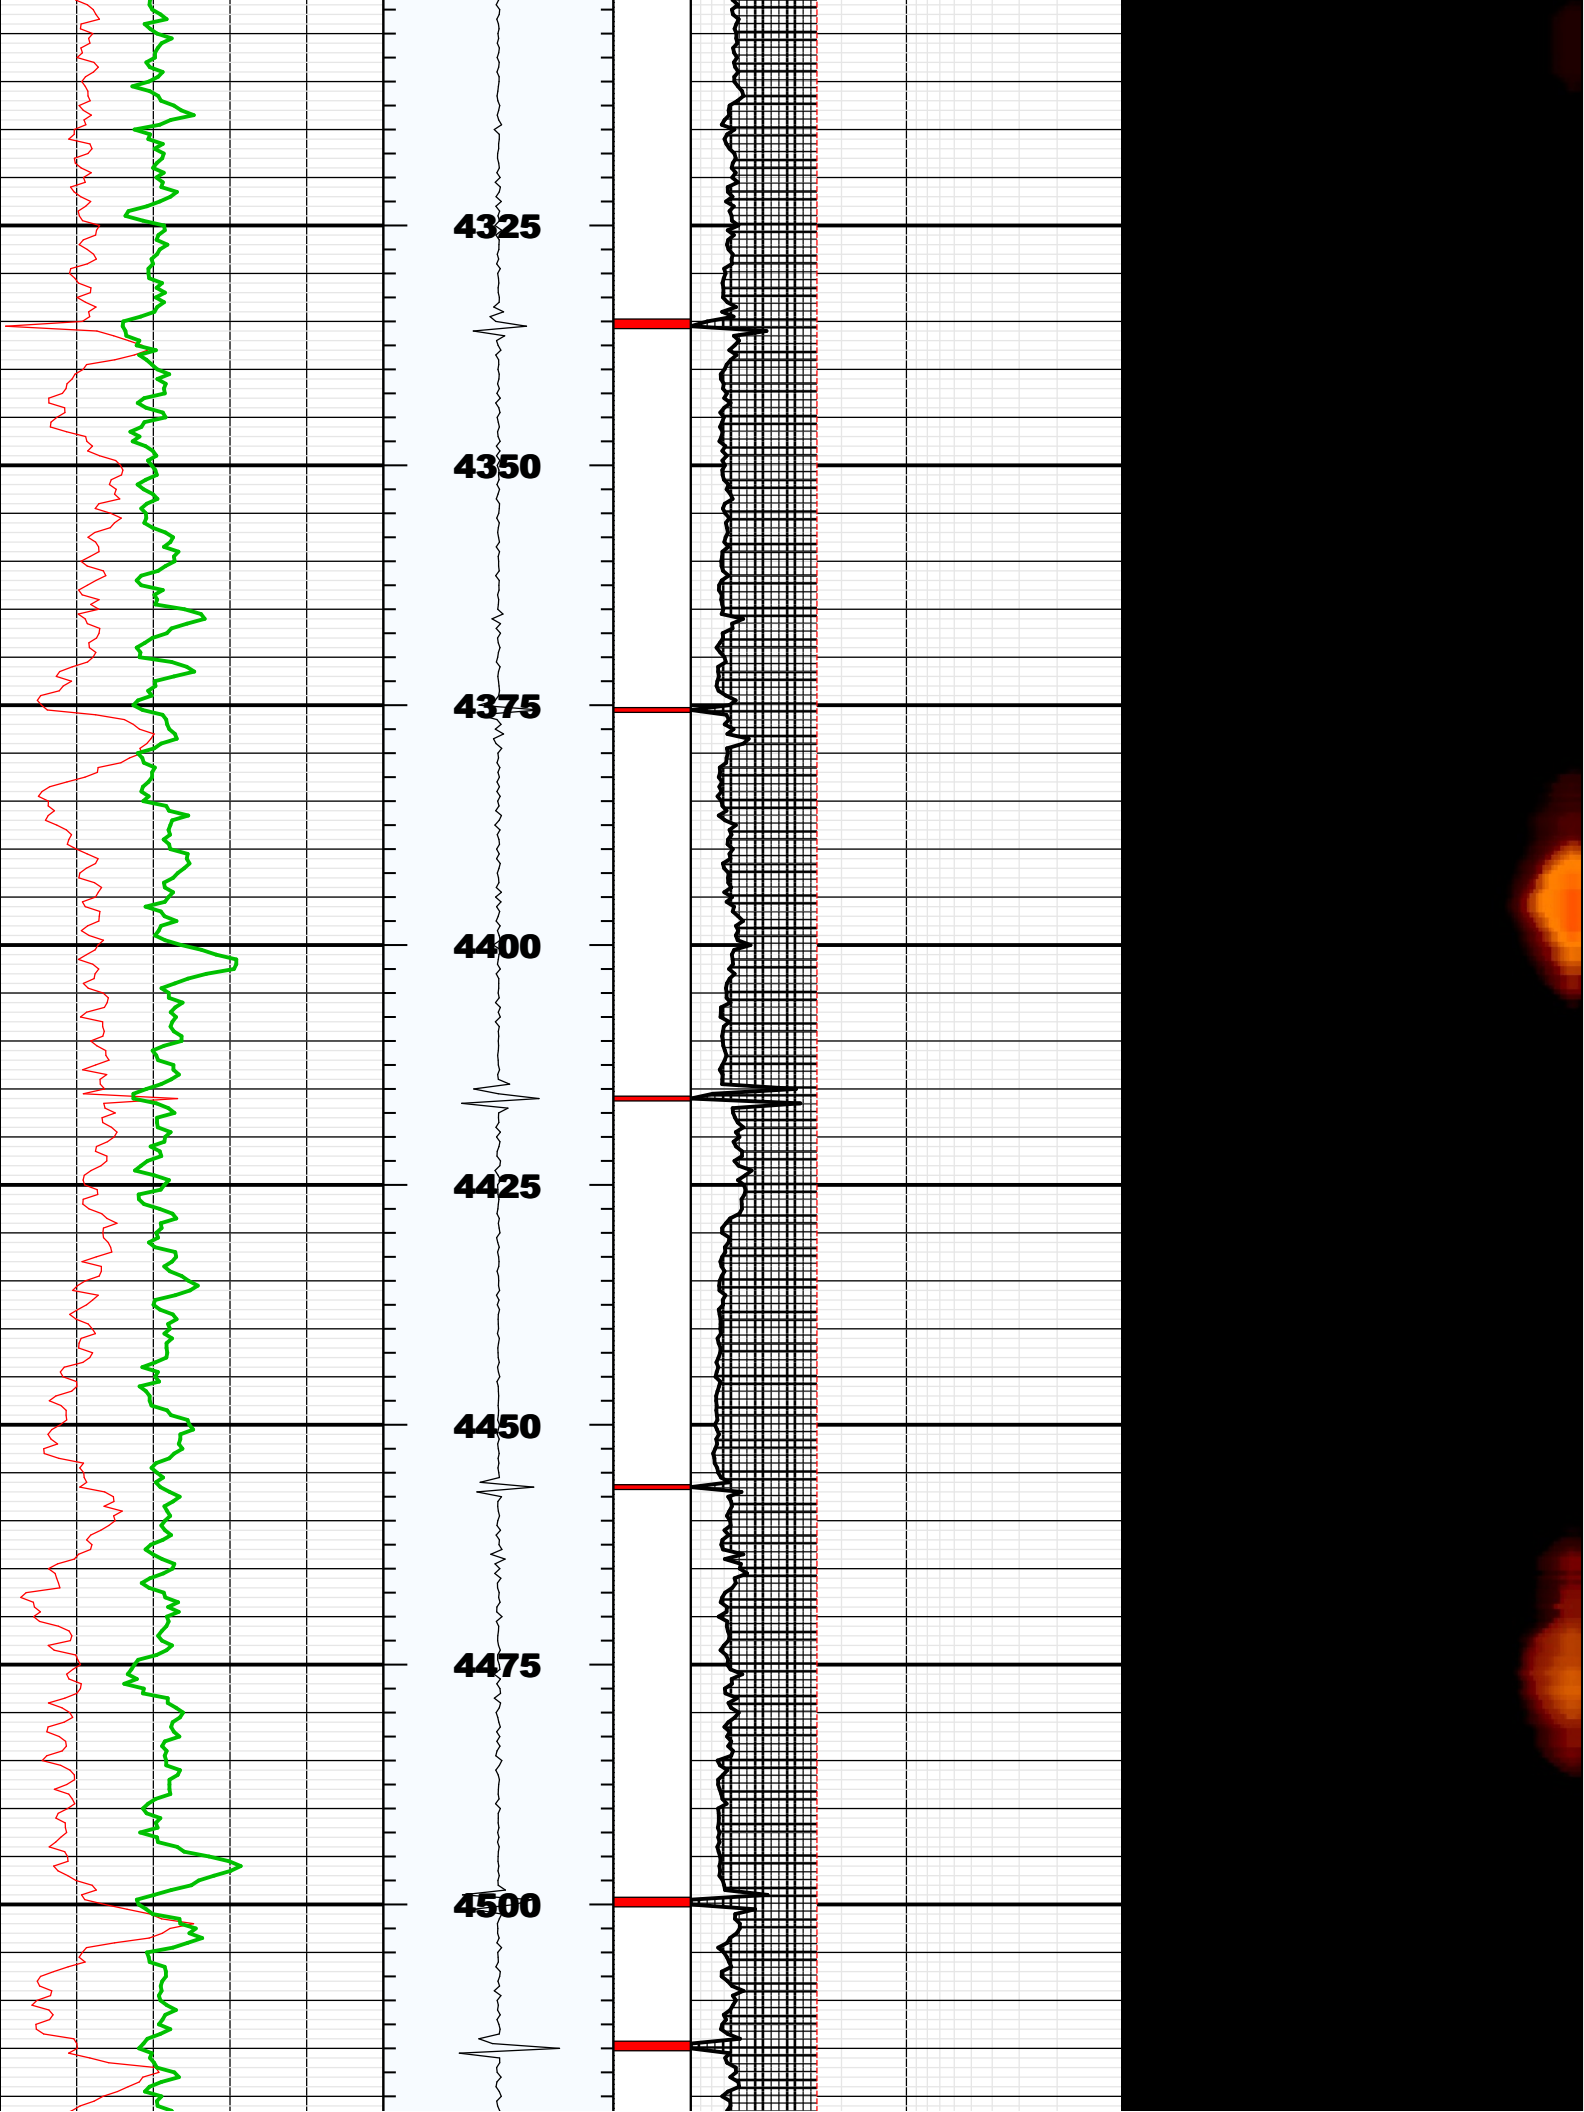


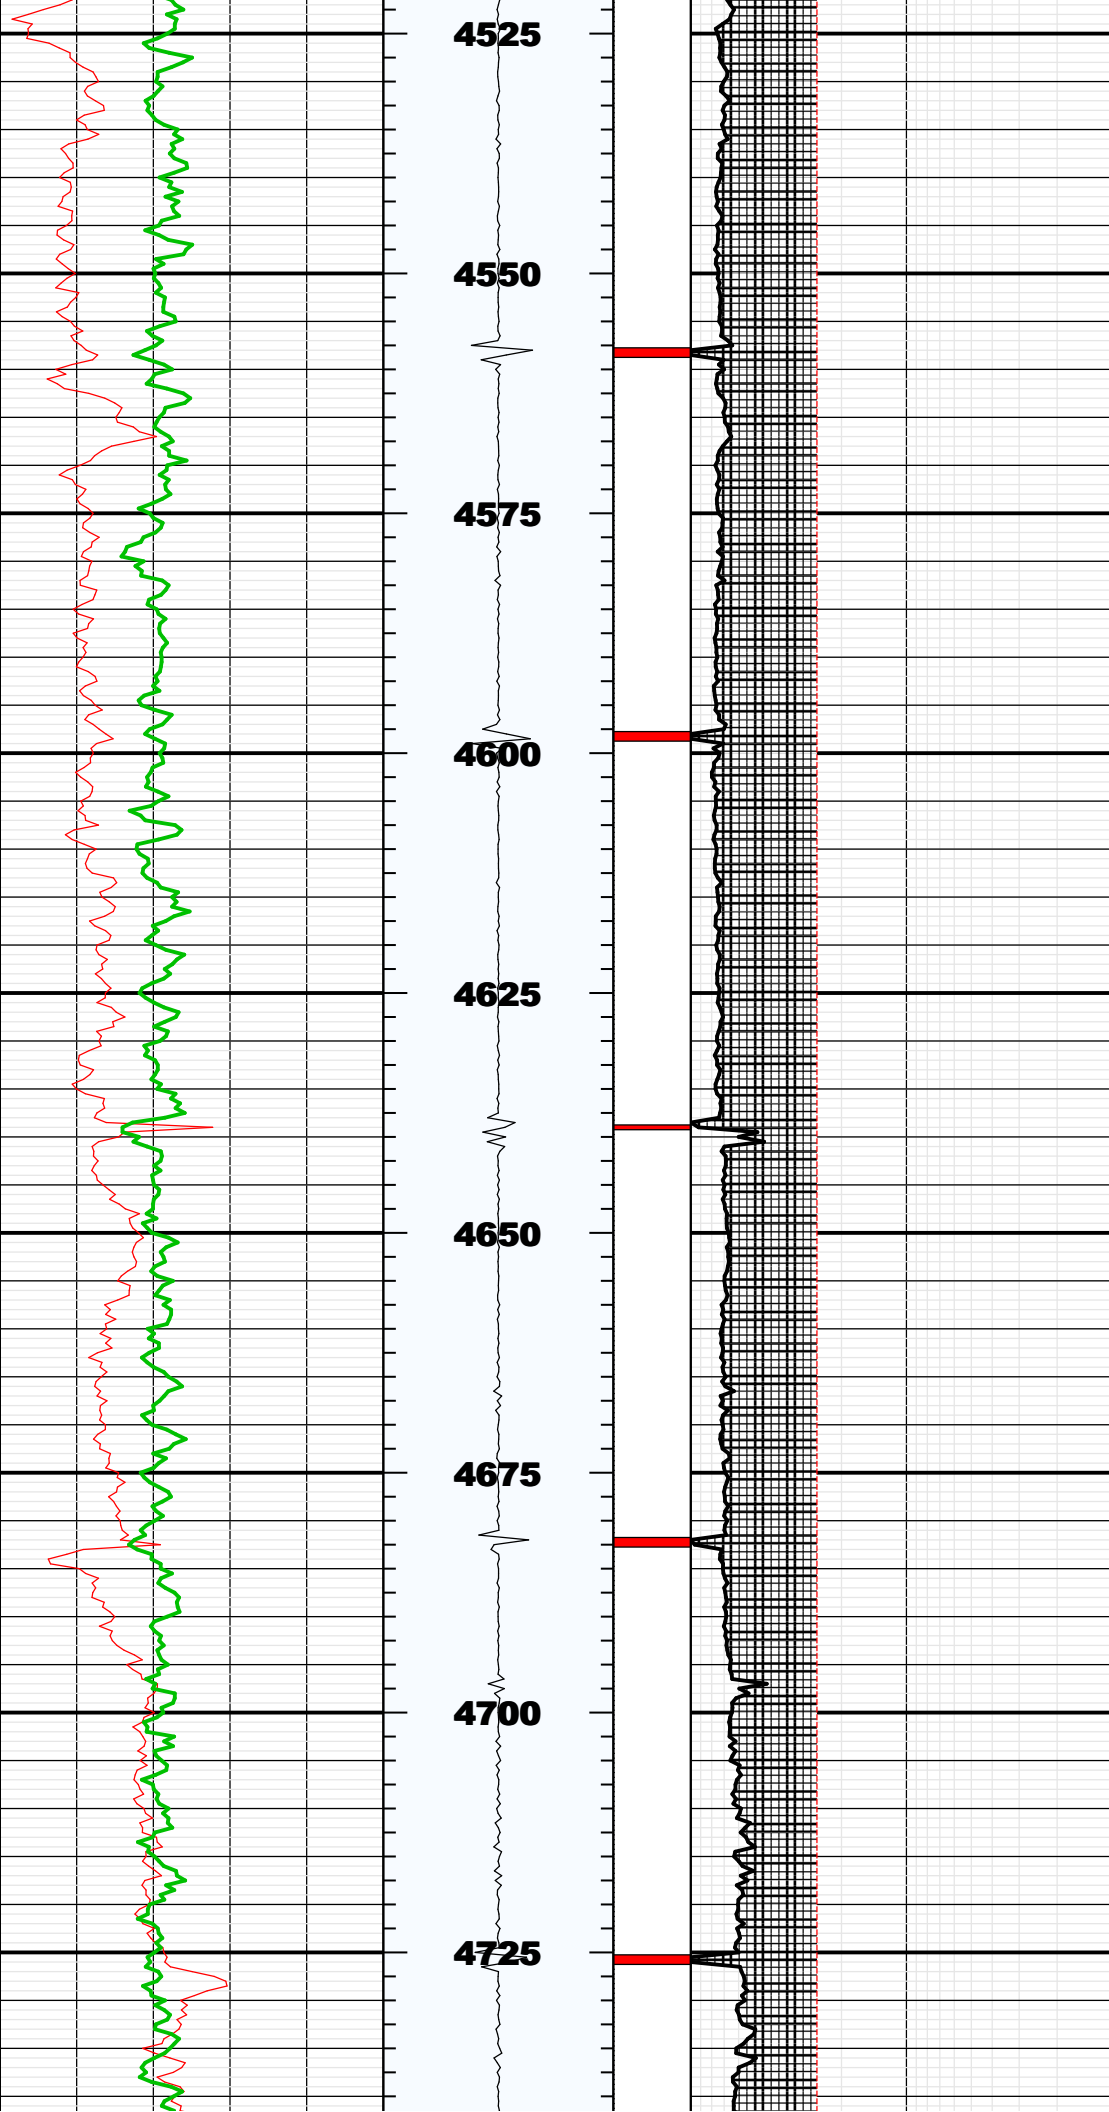


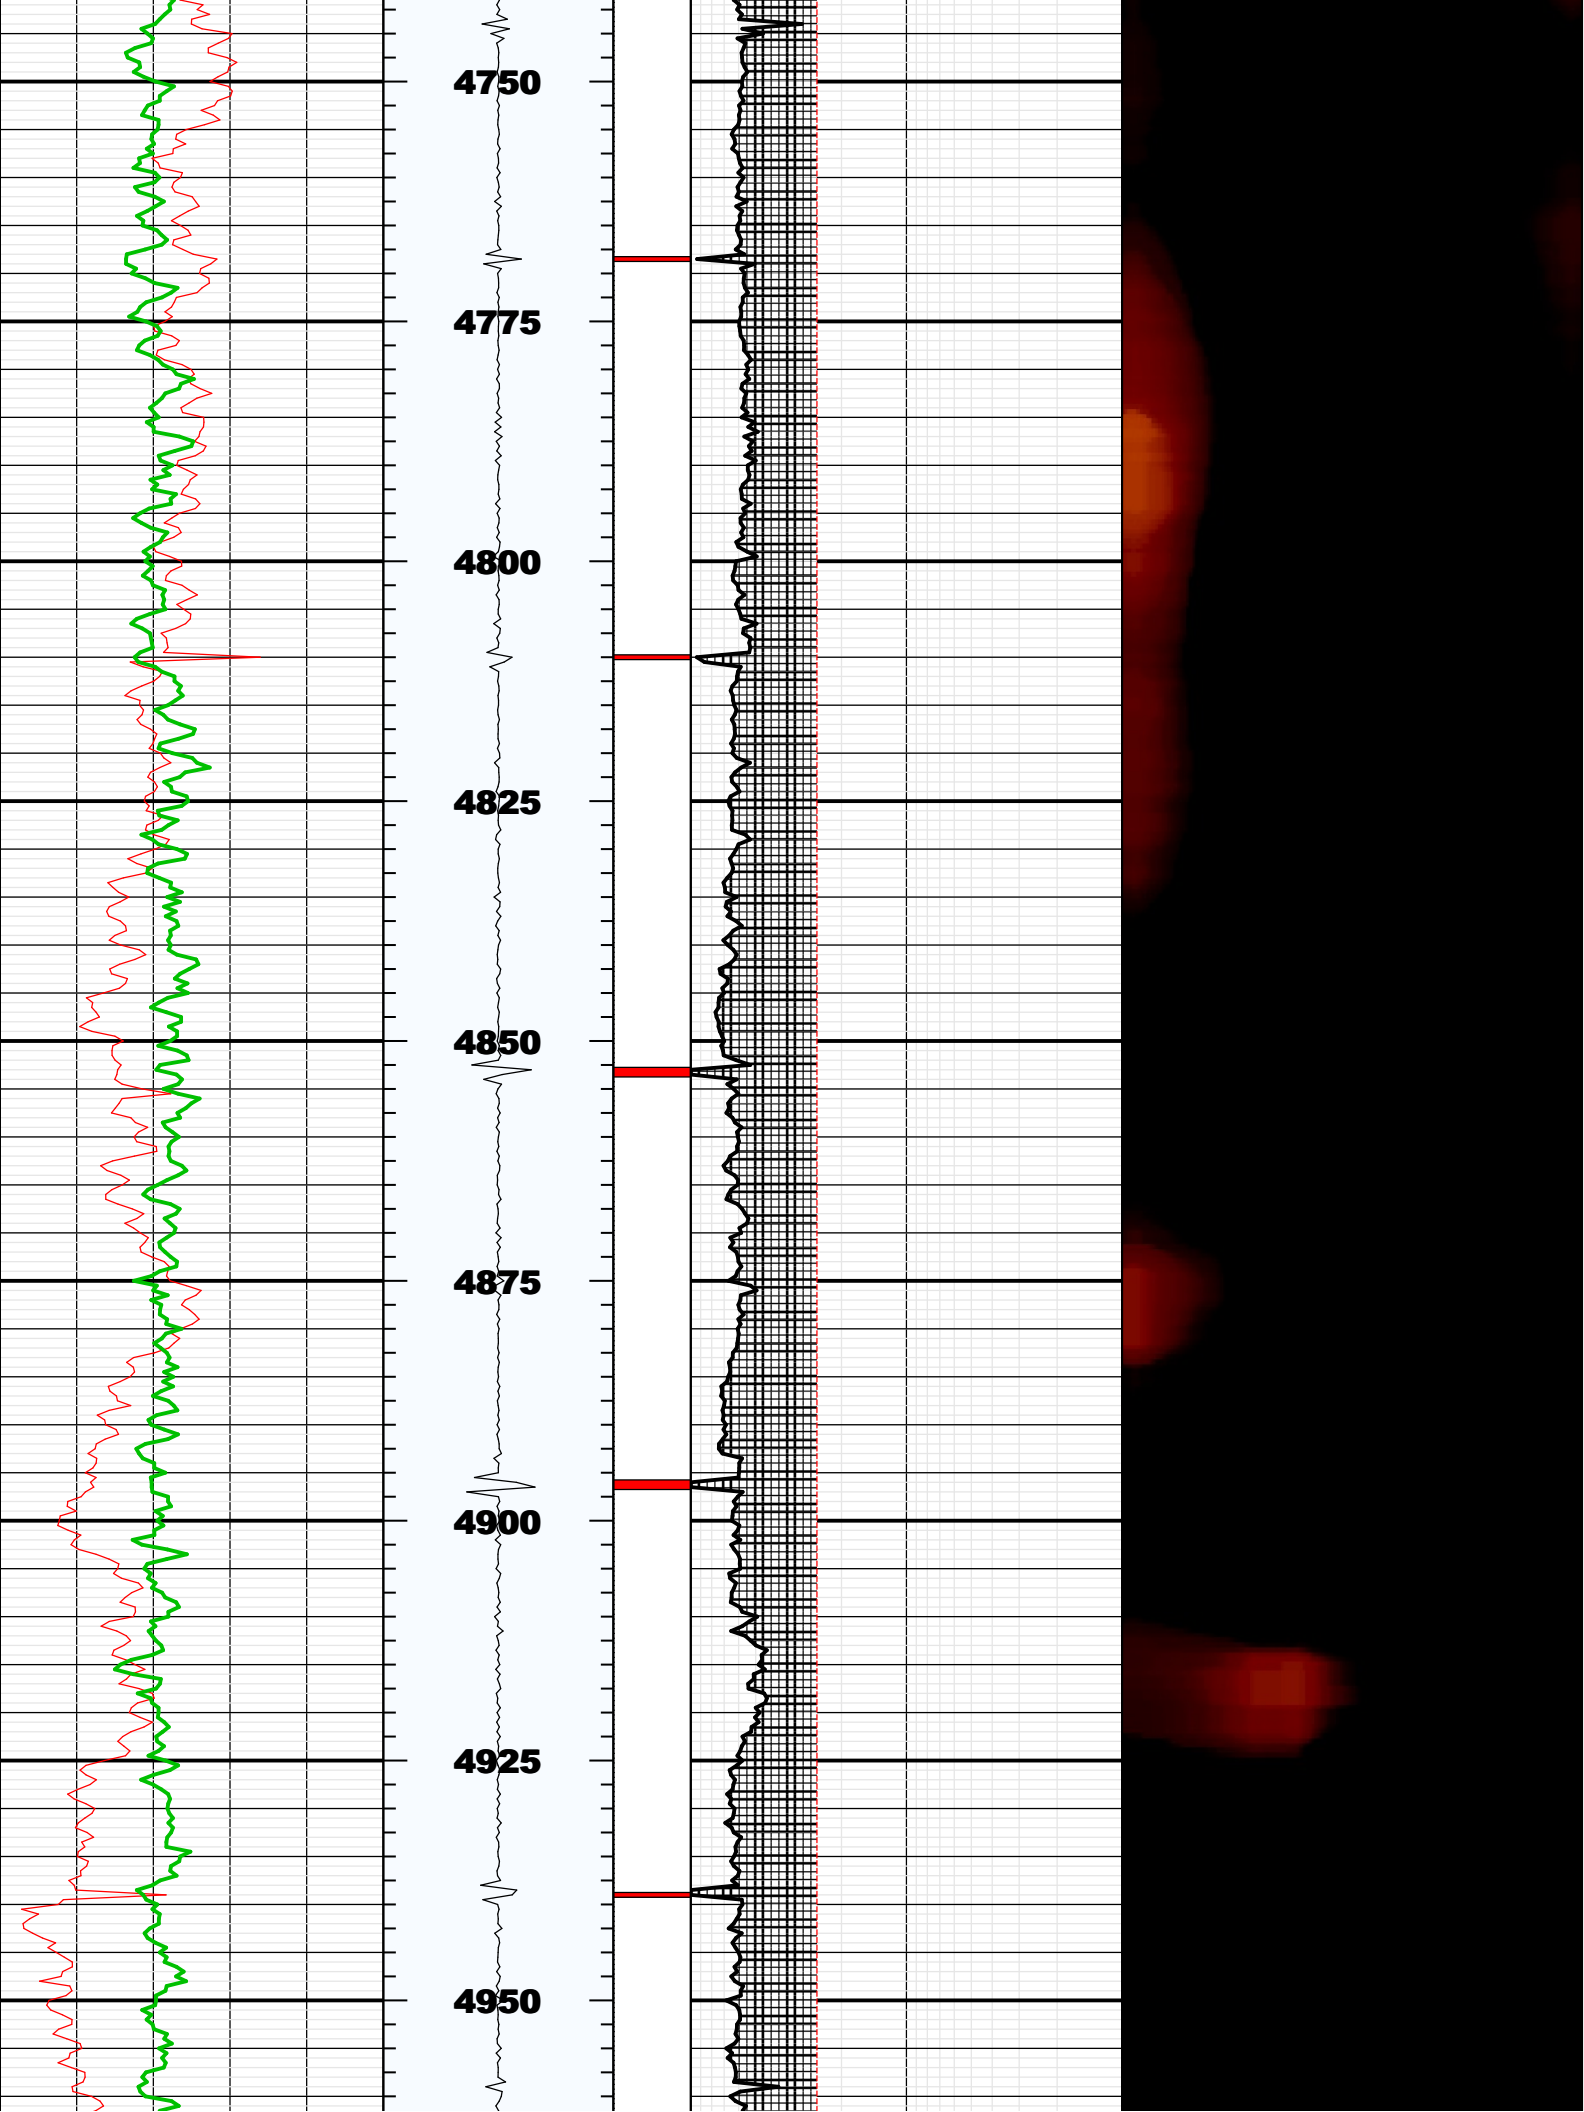

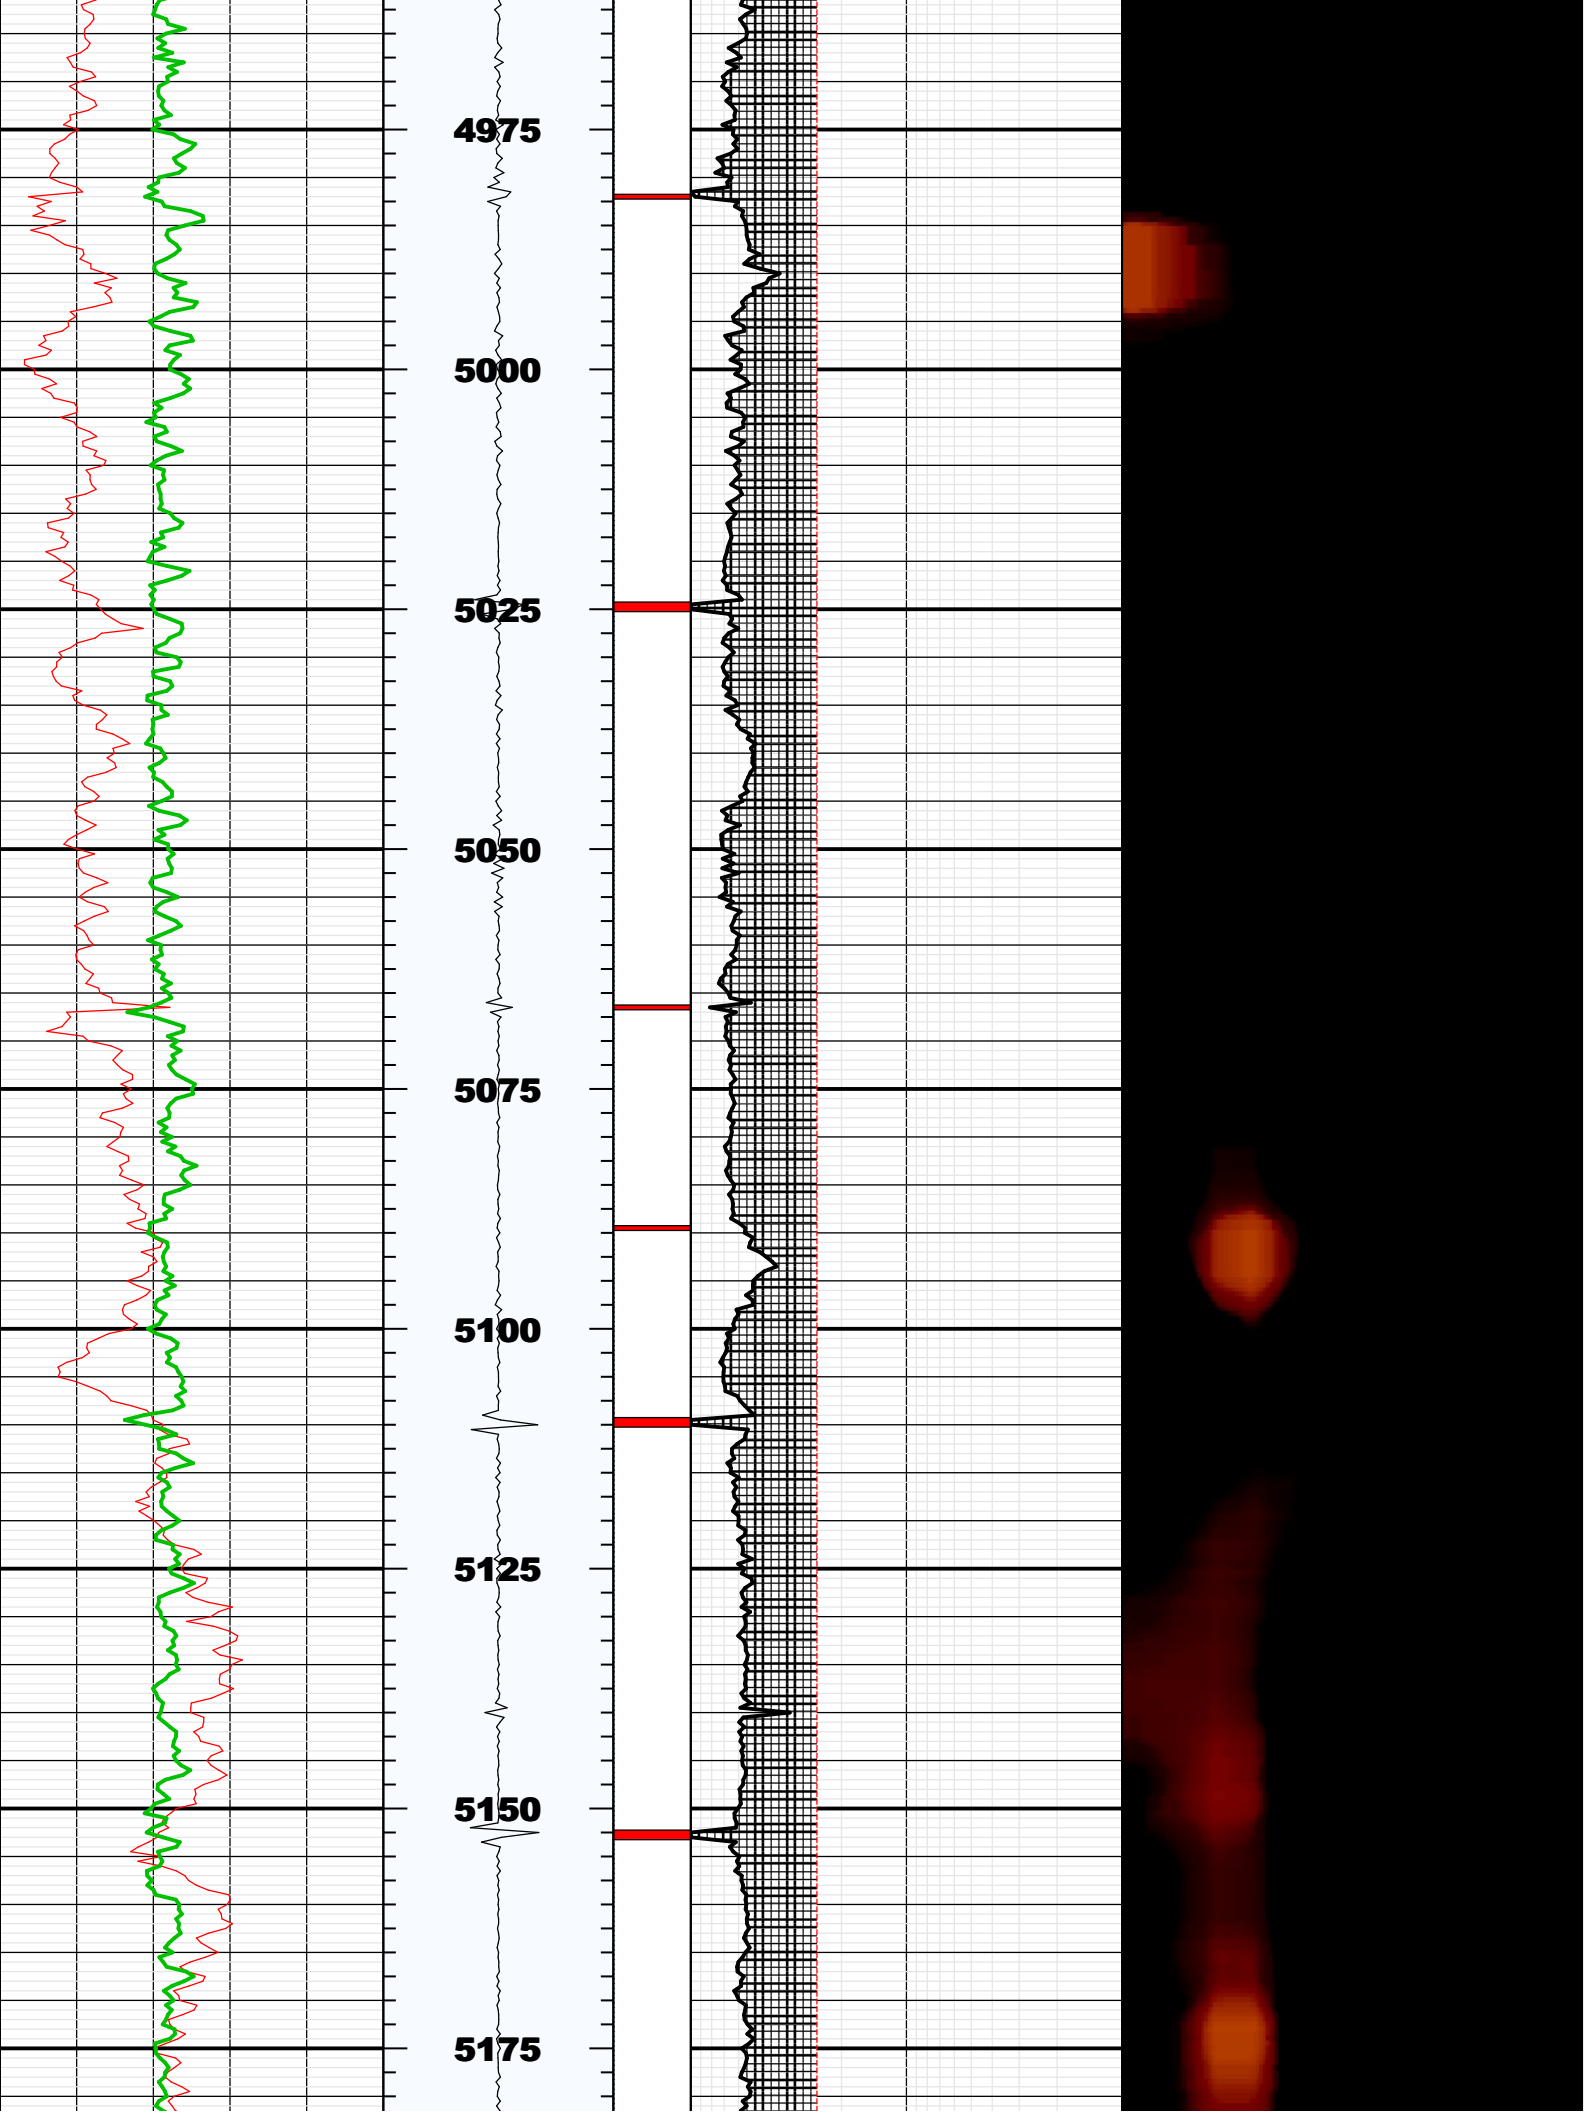

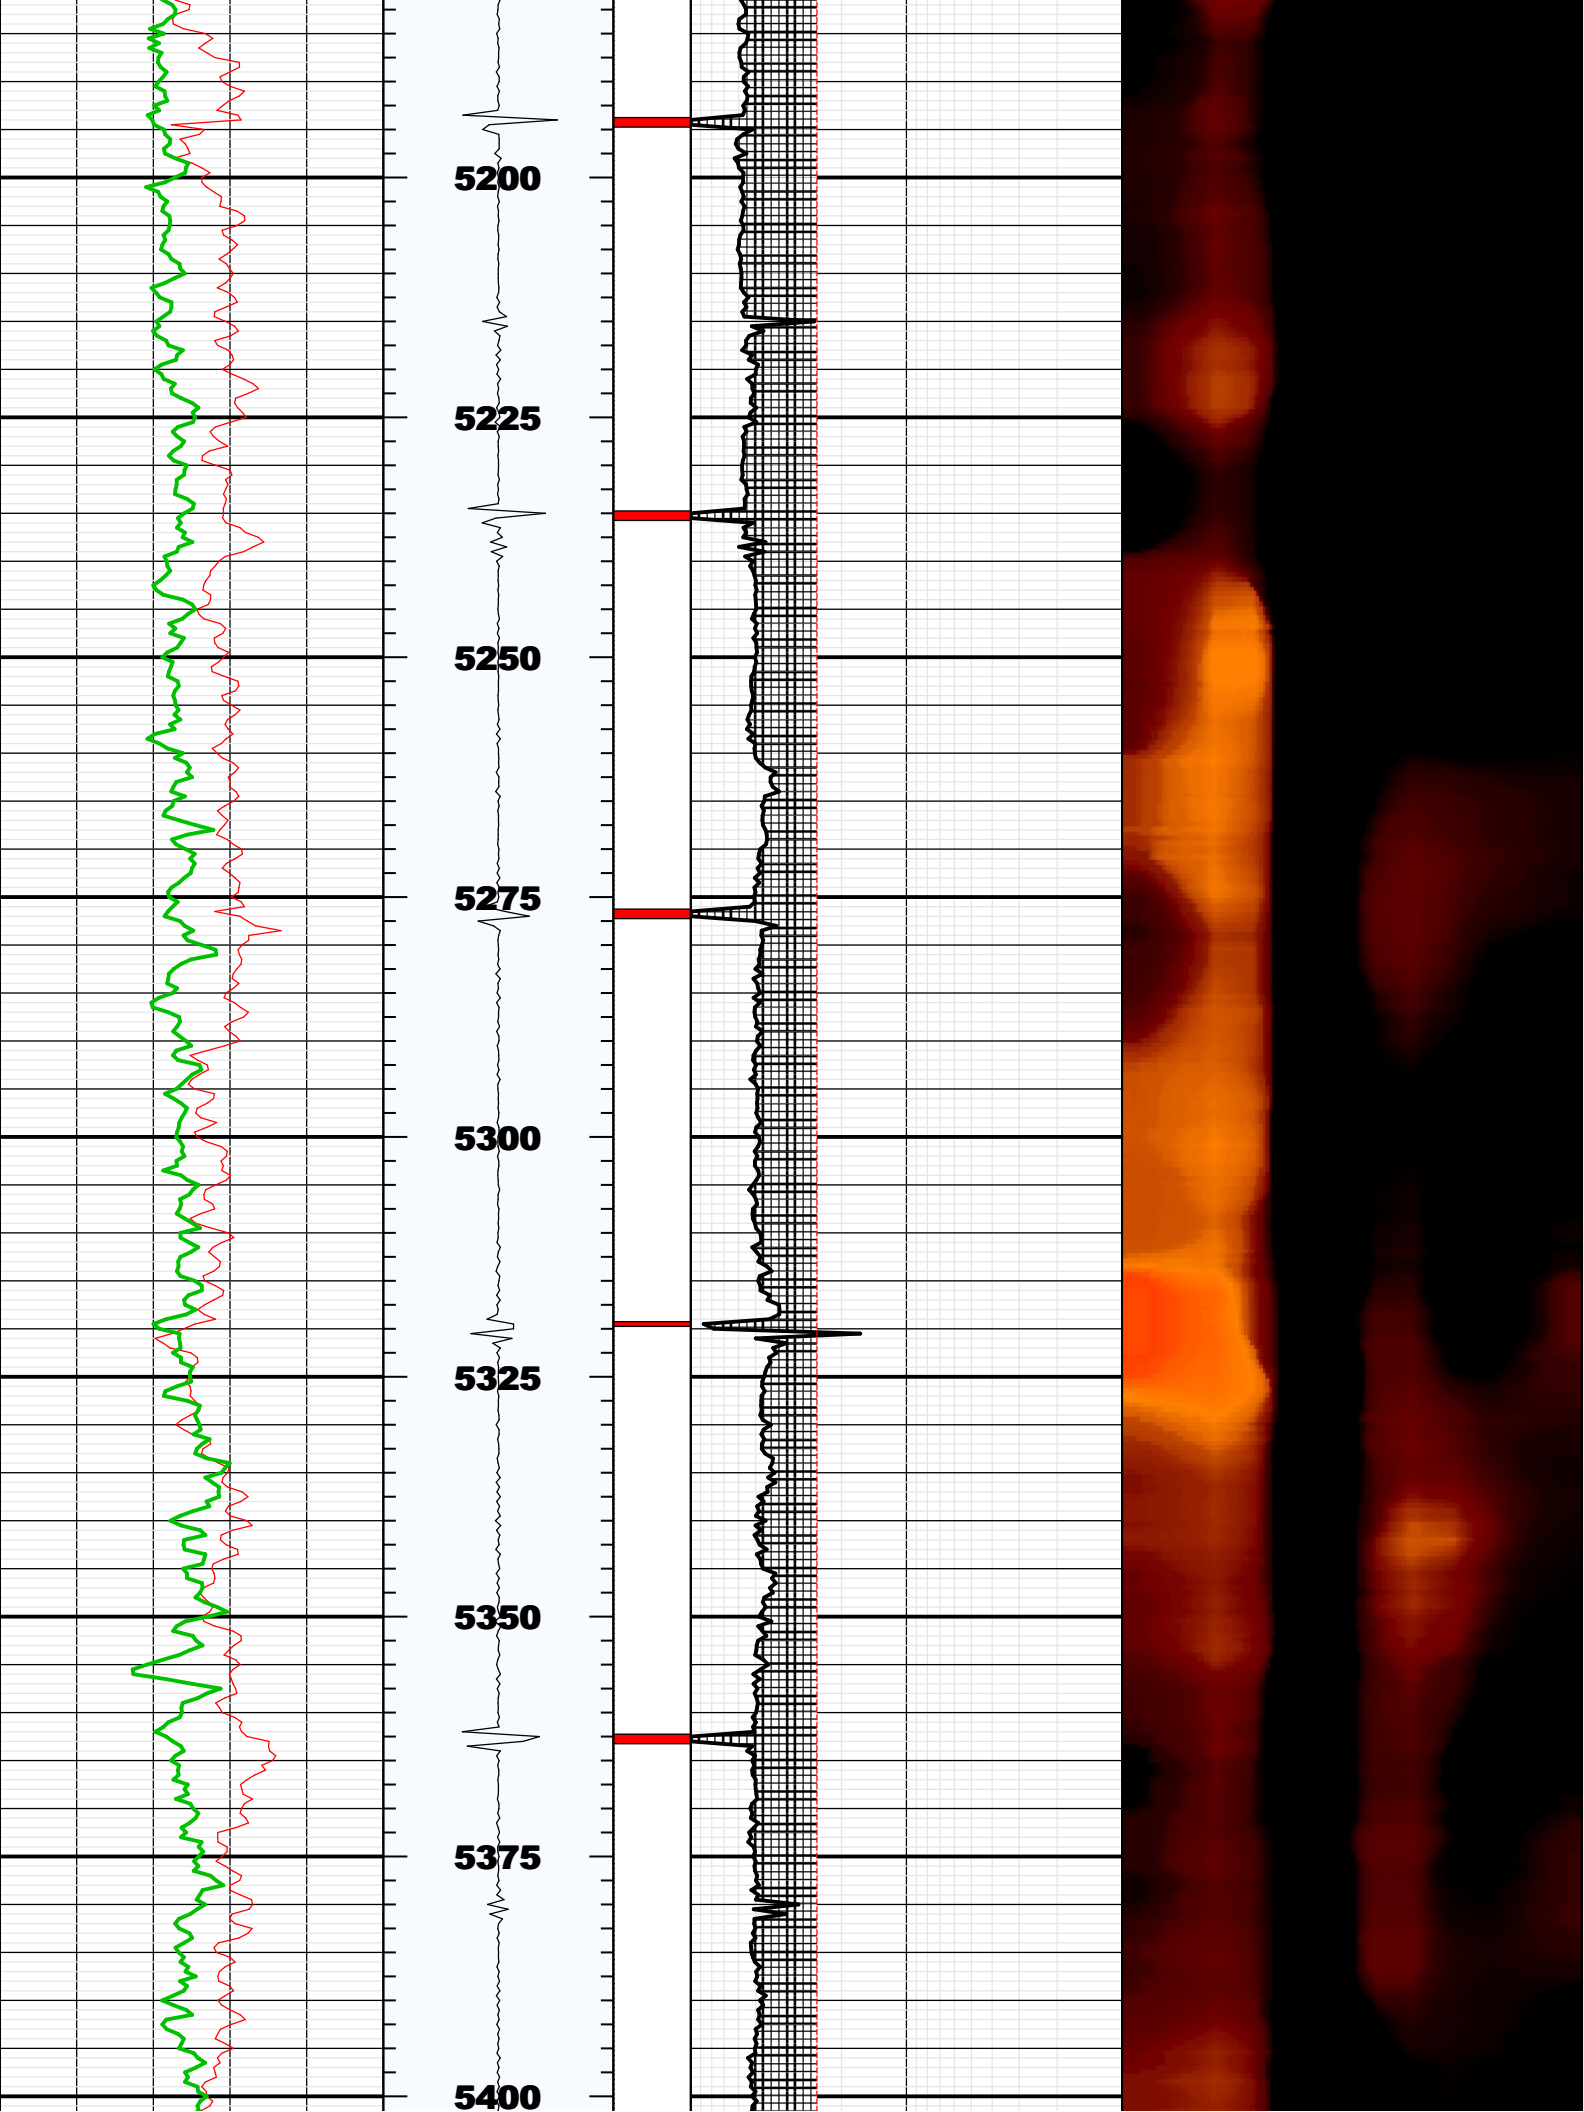

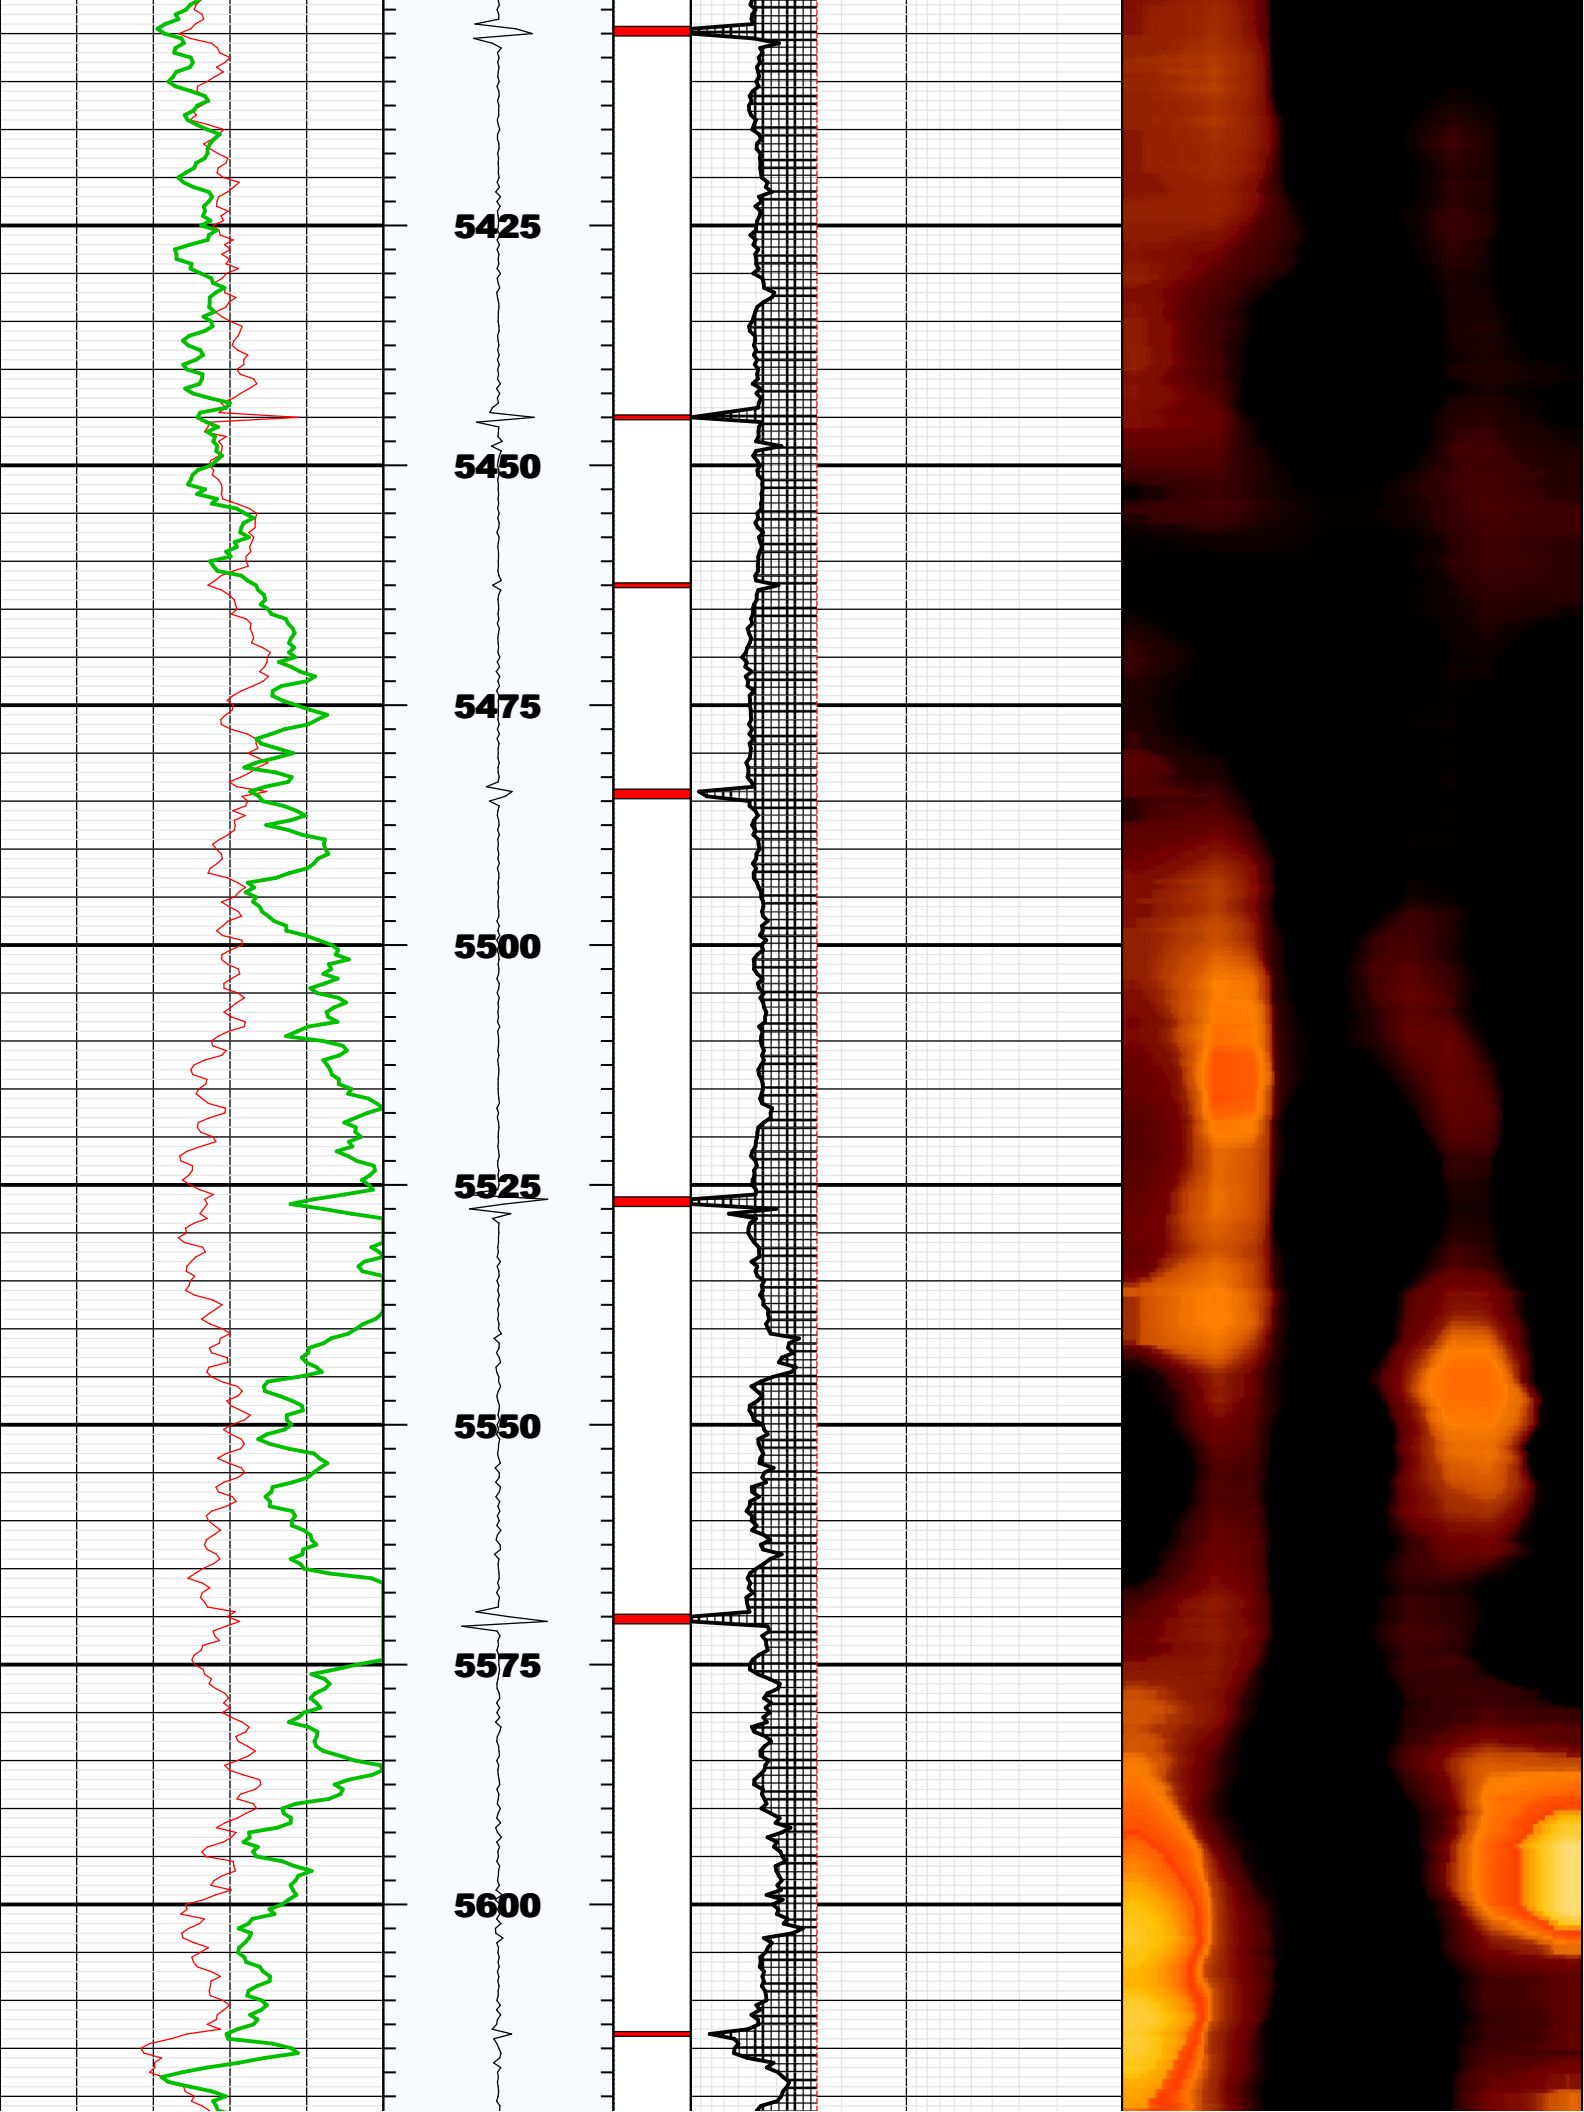


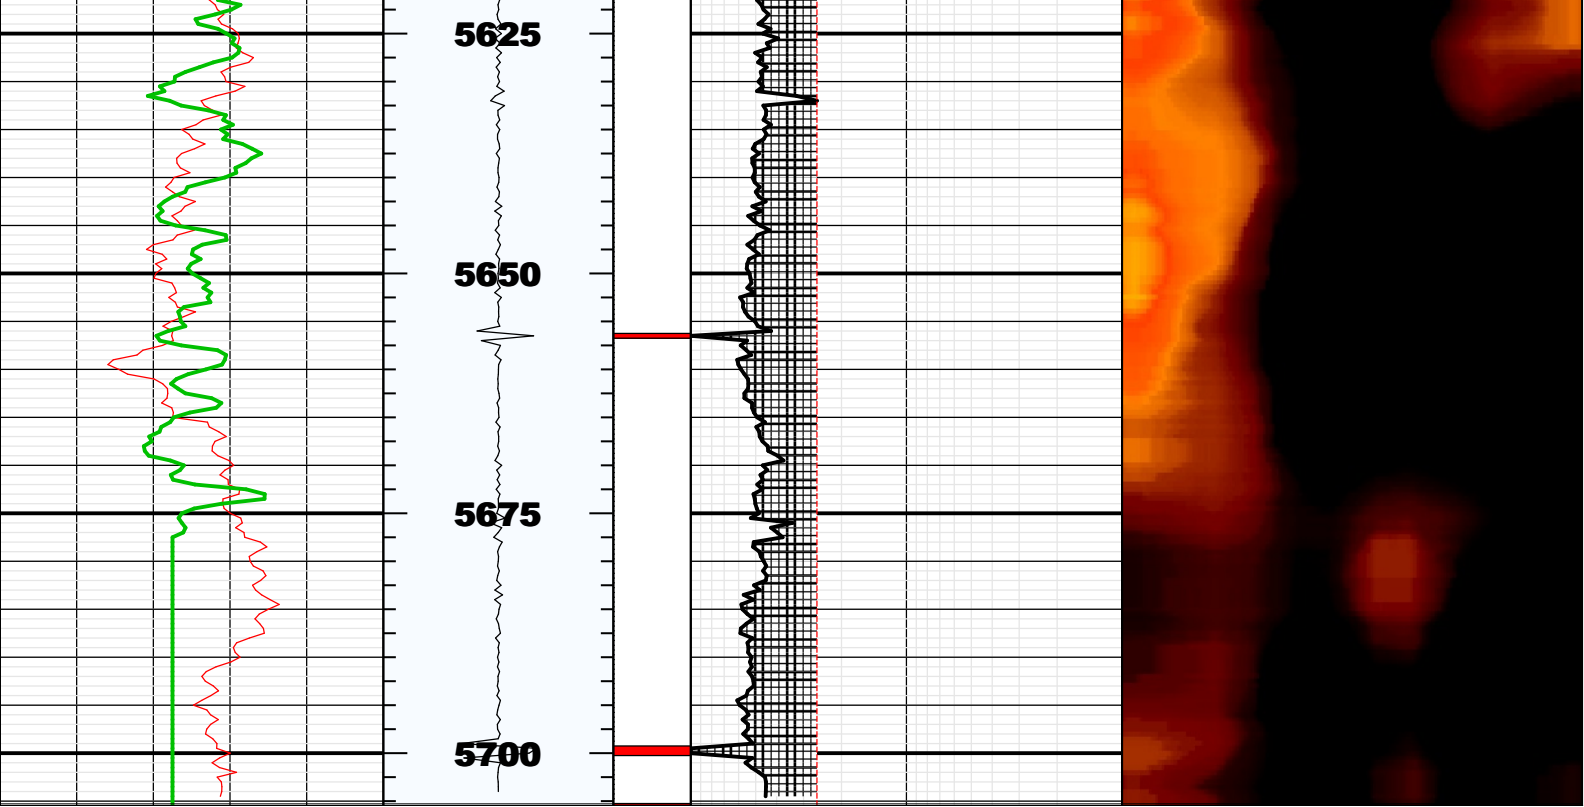



BS	8.75000	IN	Bit Size
CASG	P110		Casing Grade
CDIA	7.00000	IN	Casing Outer Diameter
CSID	6.27600	IN	Casing Inner Diameter
CSIZ	7.00000	IN	Current Casing Size
CWEI	26.00000	LB/F	Casing Weight
DFD	8.40000	LB/G	Drilling Fluid Density
DFVL	188.00000	US/F	Default Fluid Velocity
DO			
DOT	2.87400	IN	Diameter of Transducer Sensor
EMXV	100	V	EMEX Voltage
FDII	0.00000	F	FPM Data Interpolation Interval
FSOD	0_OFF		Fluid Slowness Fits Casing Outer Diameter
LOGMODE			
PP			
STEP	-0.5	F	STEP
THDH	130.00000	%	Maximum Search Thickness (percentage of nominal)
THDL	70.00000	%	Minimum Search Thickness (percentage of nominal)
THDP	Fundamental		Thickness Detection Policy
THNO	0.36200	IN	Nominal Thickness of Casing
TMUC	WRM		Type of Mud
U-USIT_DT3P			
UPAT	375K		Emission Pattern
USUB	7INC		USIT Sub Identifier
UWKM	D603010L		Working Mode
VCAS	51.40000	US/F	Ultrasonic Transversal Velocity in Casing
WINB	31.97155	US	Window Begin Time
WINE	74.17931	US	Window End Time
ZCAS	46.25000	MRAY	Acoustic Impedance of Casing
ZINI	-1.00000	MRAY	Initial Estimate of Cement Impedance
ZMUD	1.80000	MRAY	Acoustic Impedance of Mud
ZTCM	2.60000	MRAY	Acoustic Impedance Threshold for Cement
ZTGS	0.30000	MRAY	Acoustic Impedance Threshold for Gas
WLEN	20.00000	US	T^3 Processing Length


Repeat Pass

Company: Noble Energy Inc
Well: Morton State LD01 79 1BHN
Field: Wildcat

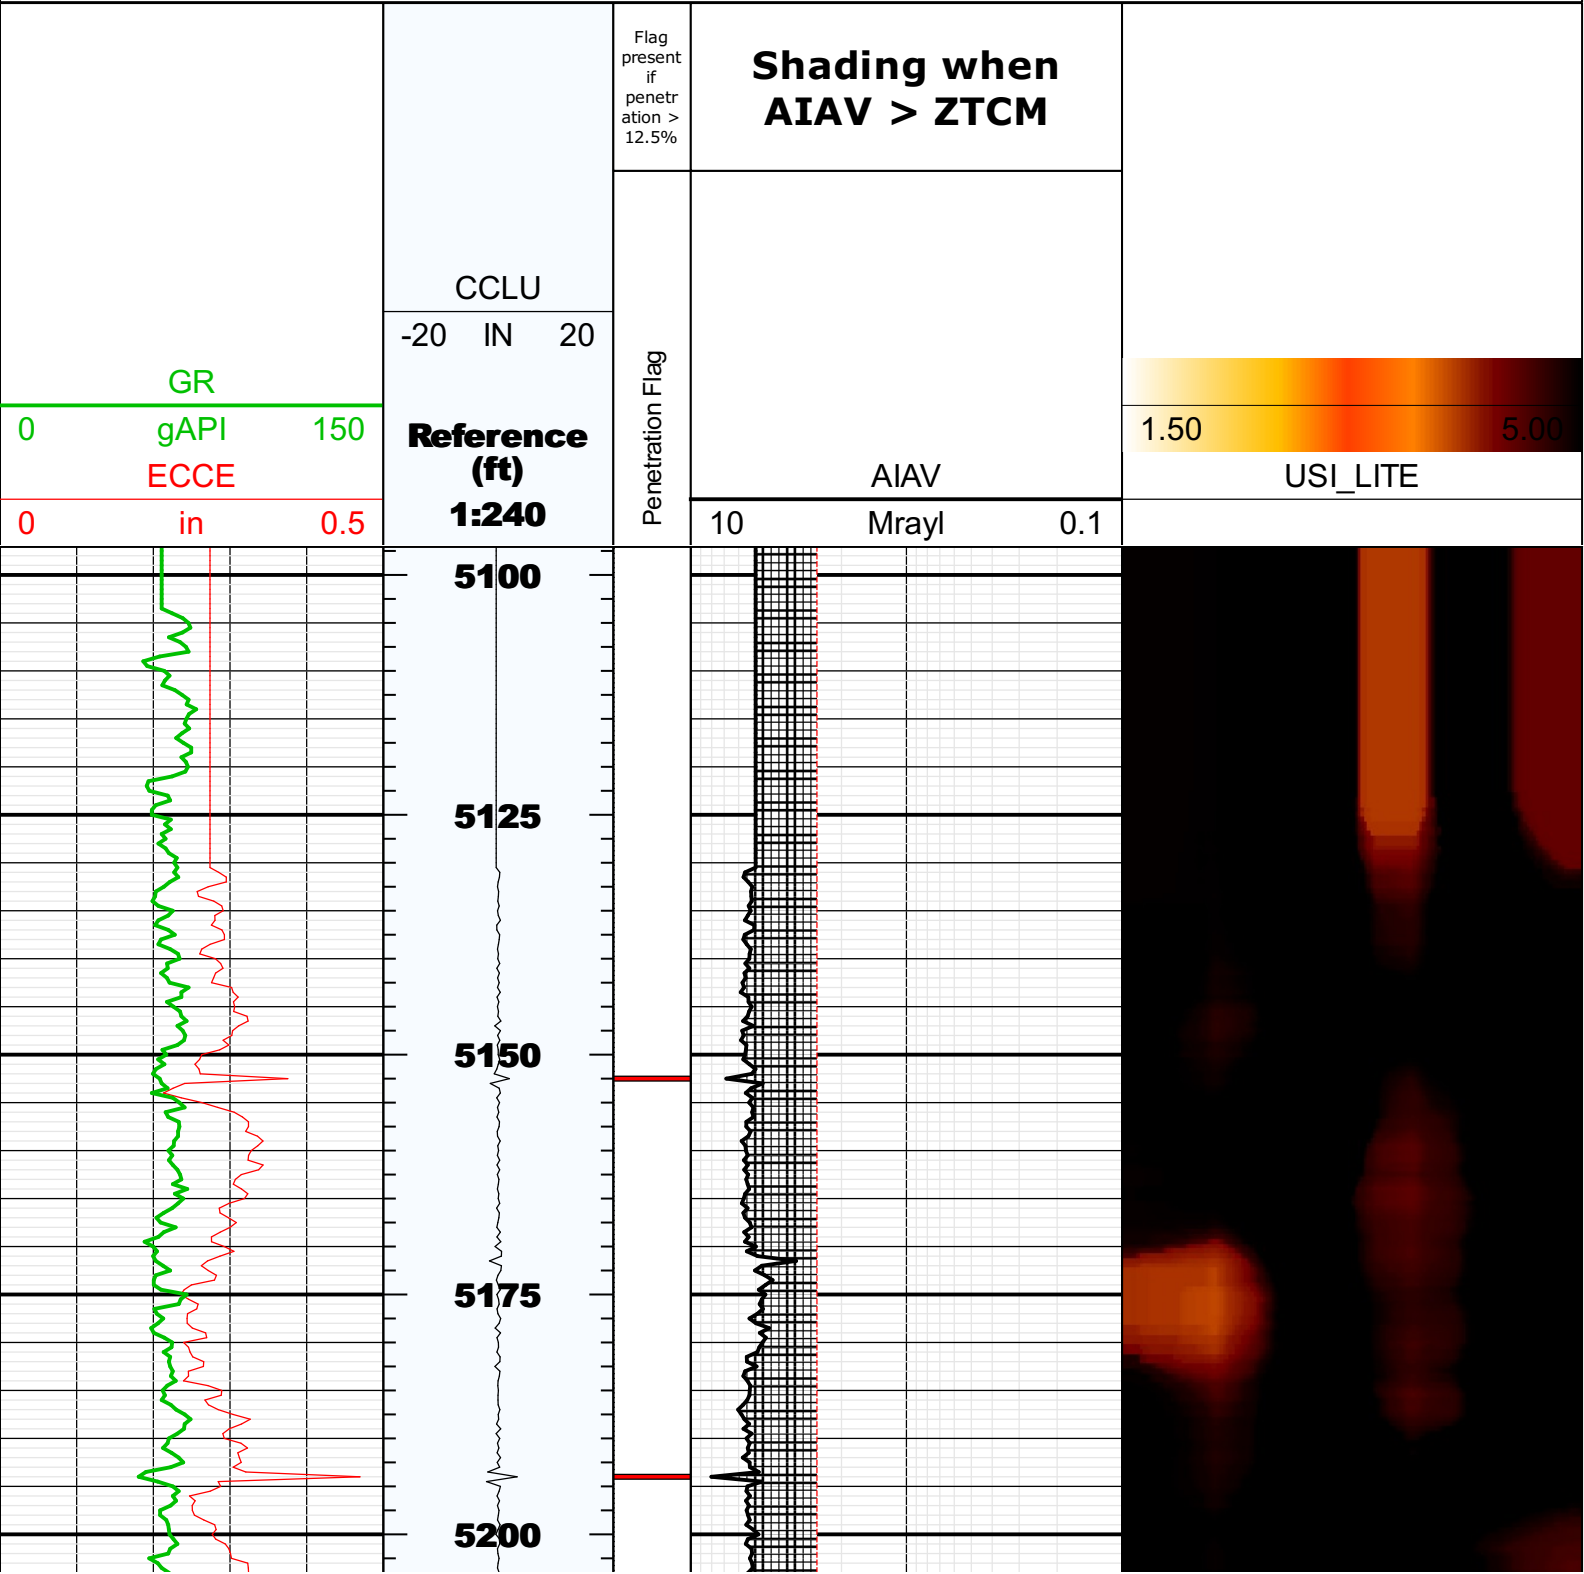

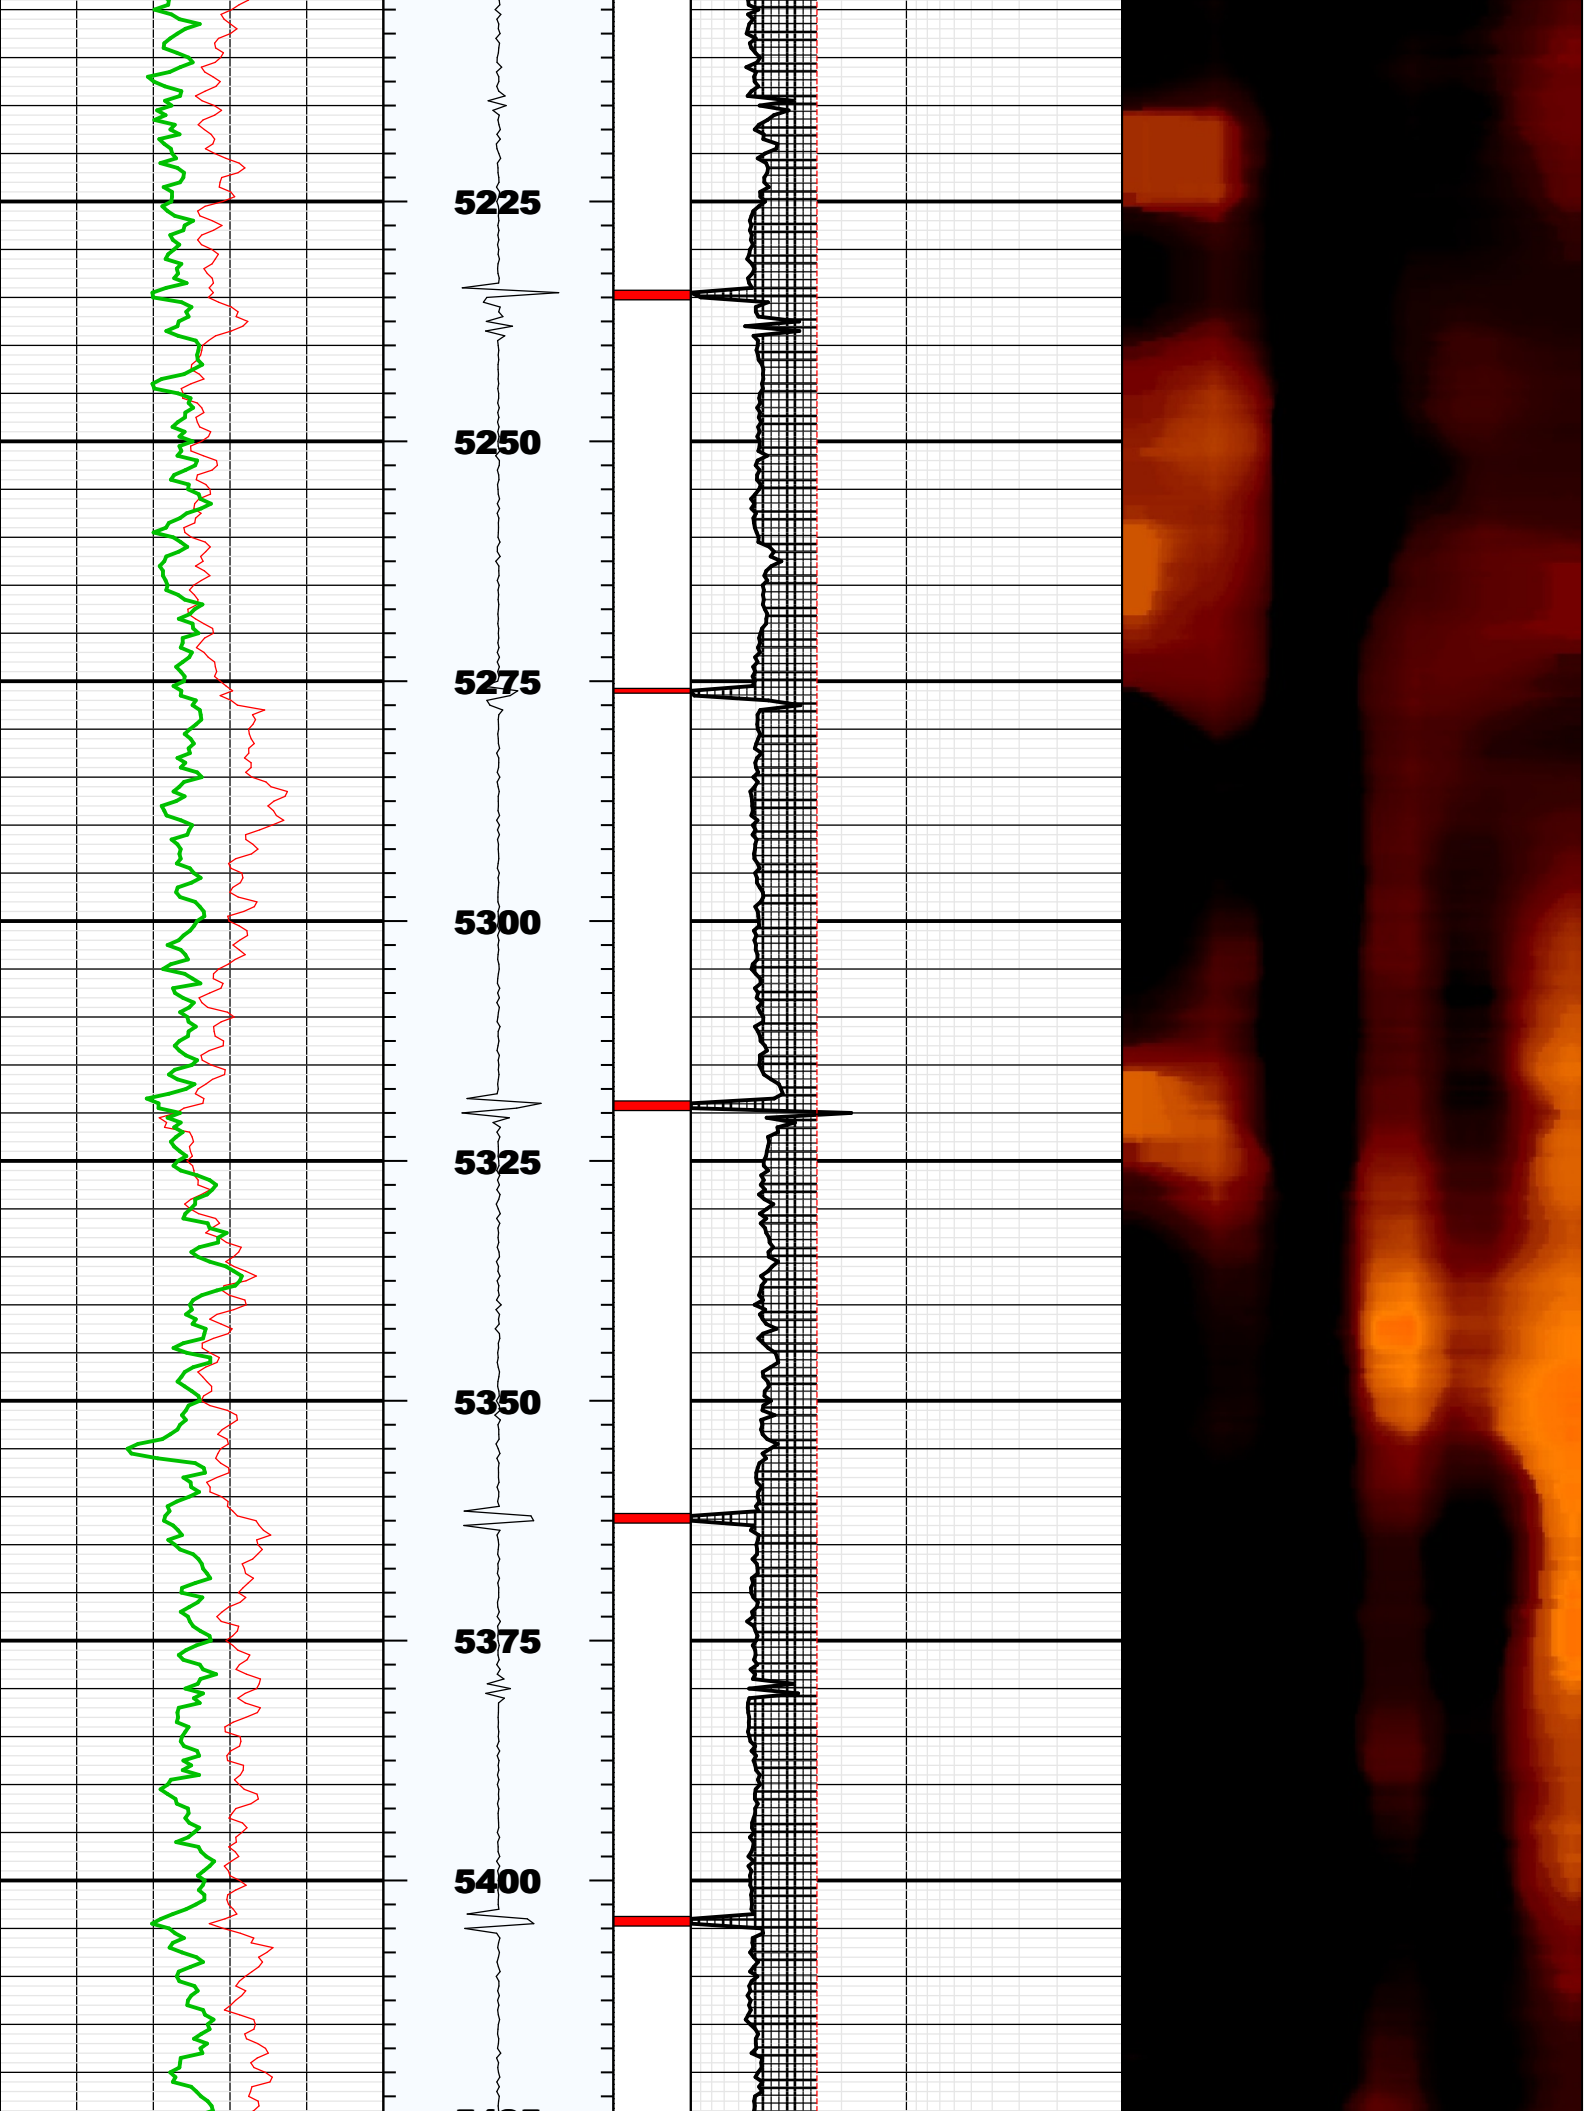

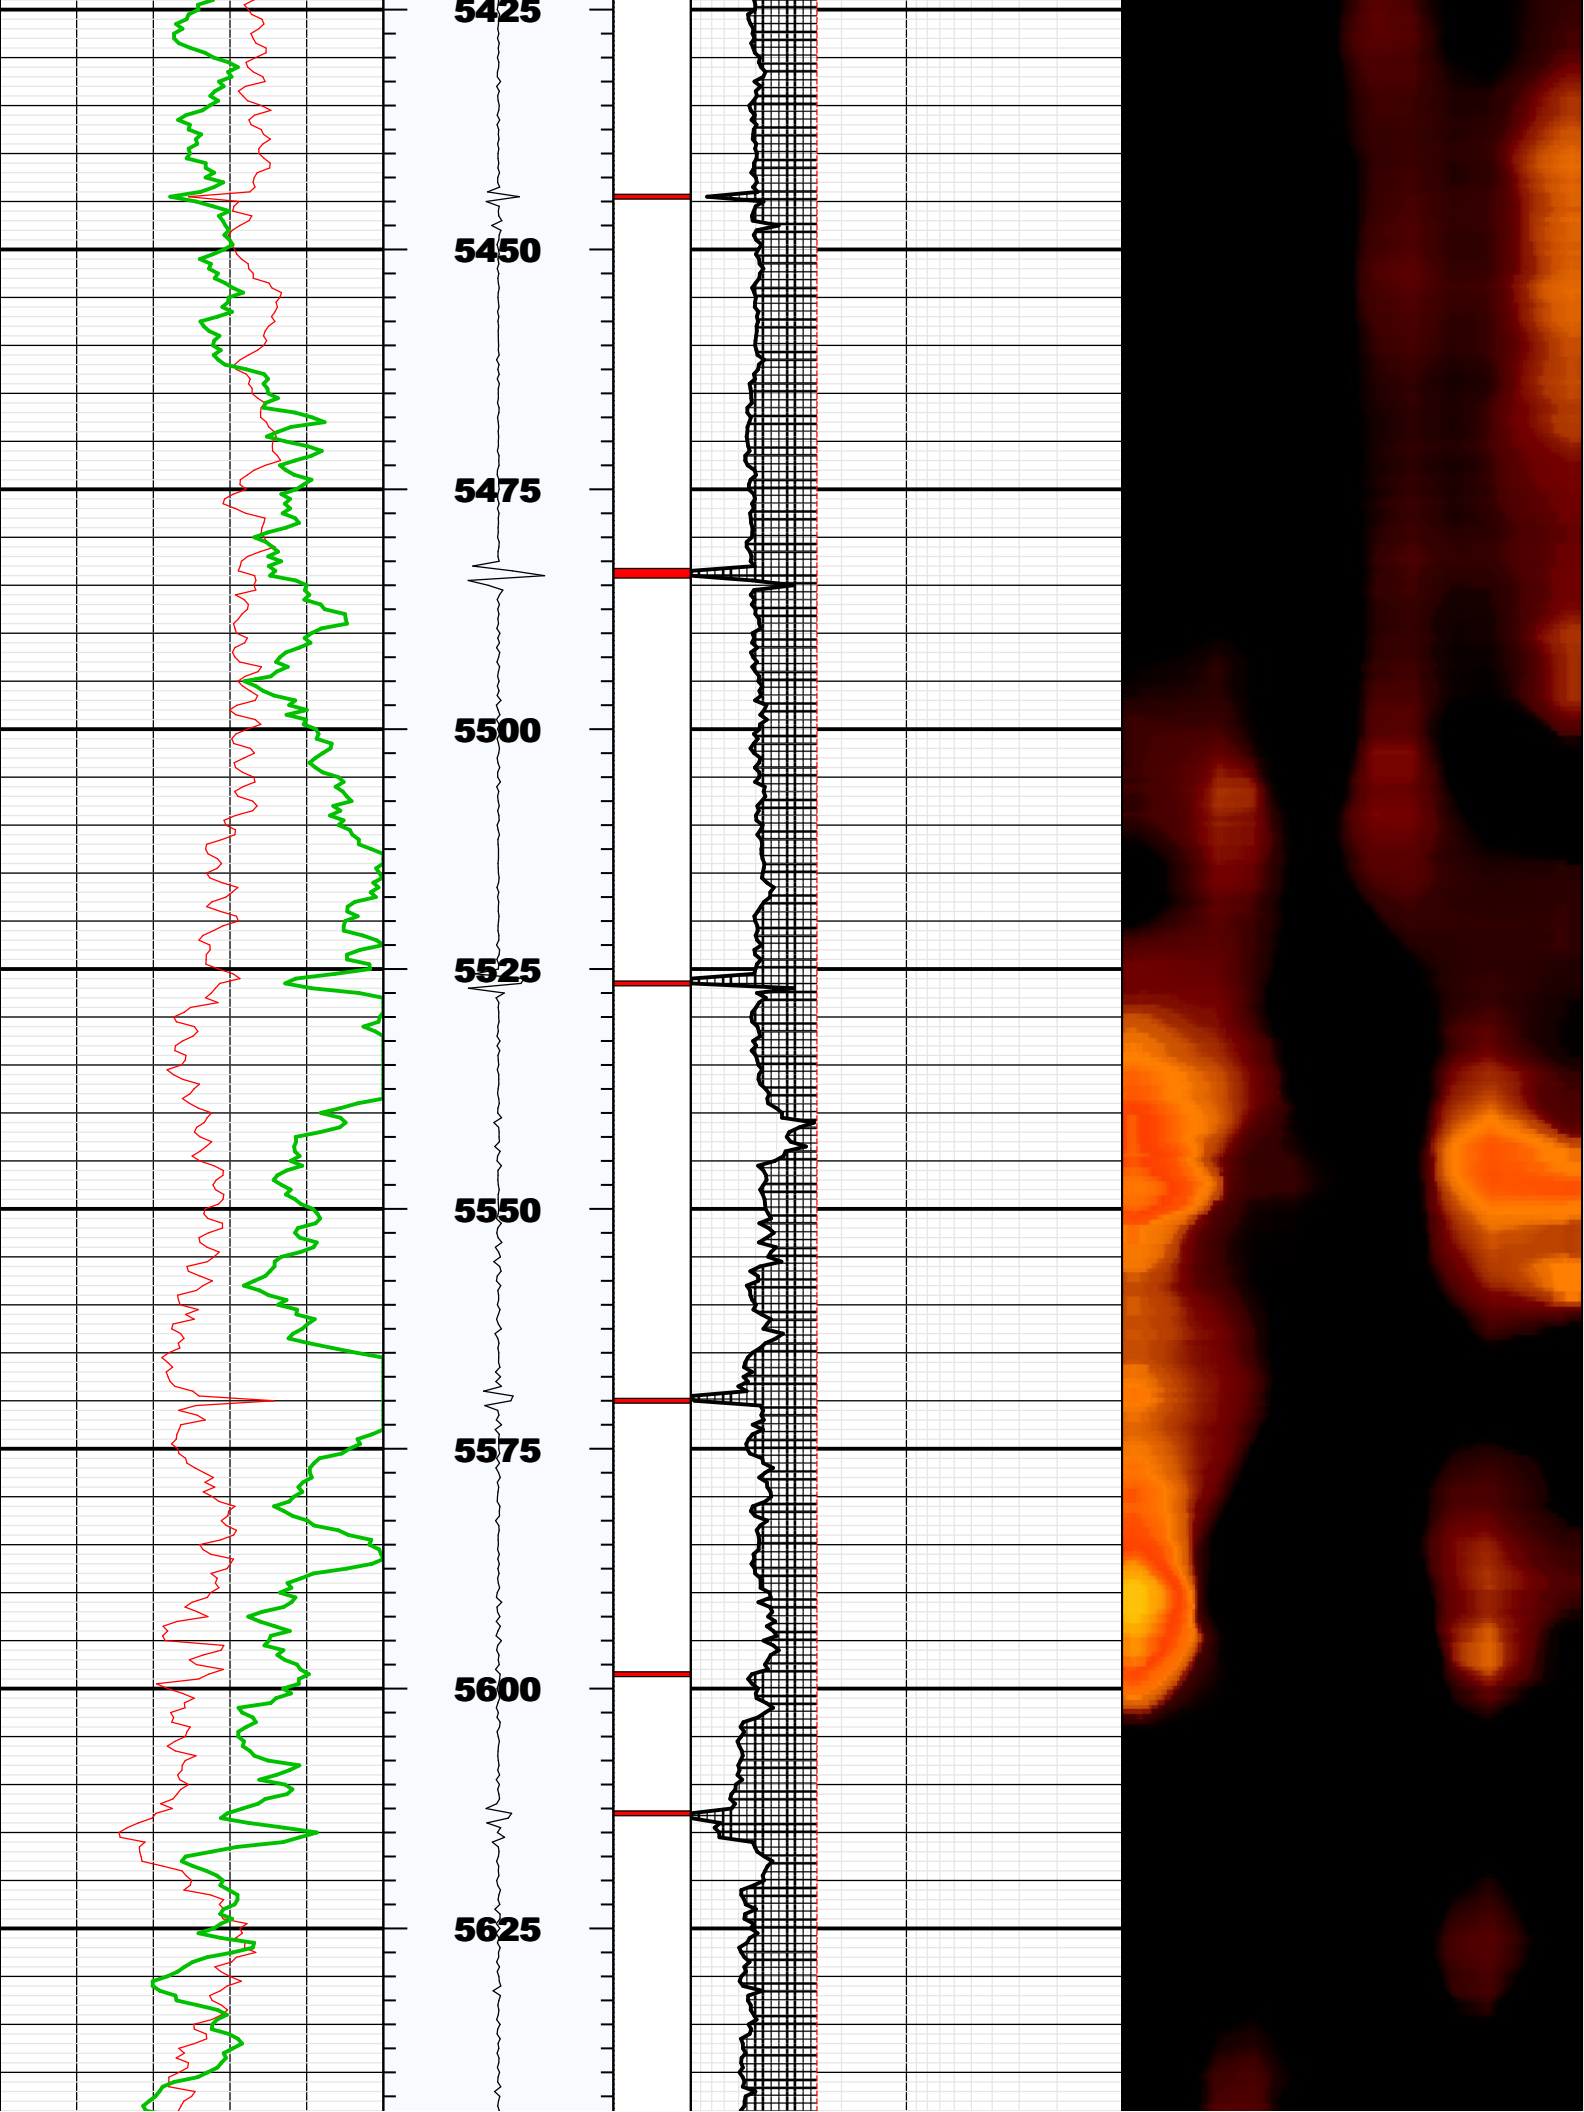

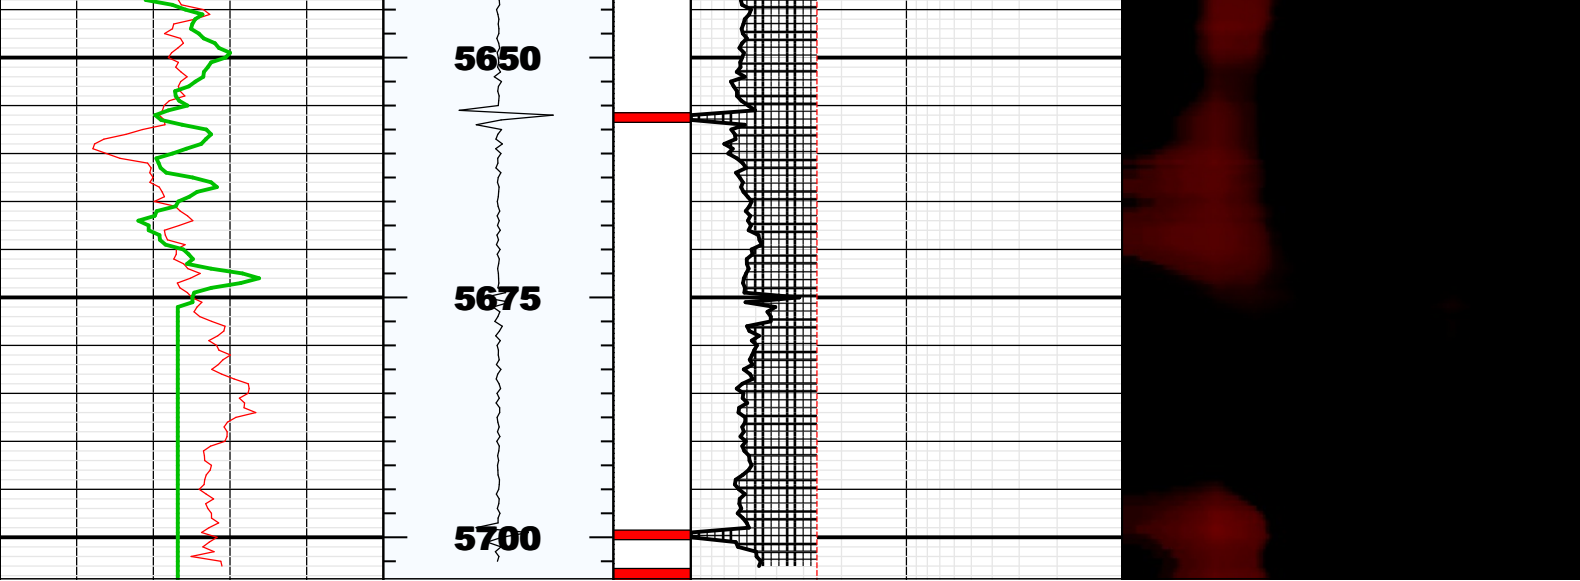

Fluid Properties Used for Main Pass

