

NOBLE ENERGY INC.
 Schmidt Amoco 43-23
 NESE 23-4N-66W
 2,082' FSL & 558' FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 8/3/2015

API: 05-123-16487
 COGCC #

GL Elev: 4,732'
 KB Elev: 4,742'

Spud Date:

Surface Casing :

8-5/8" 24# @ 323'
 Cement: 280
 TOC: Surface


Existing cement from 3,950' - 4,920'

TOC @ 6,380'

Nio Top 6,882'

Production Casing :

4-1/2" 11.6# @ 7,316'
 Cement: 560 sx
 TD: 12/18/1992

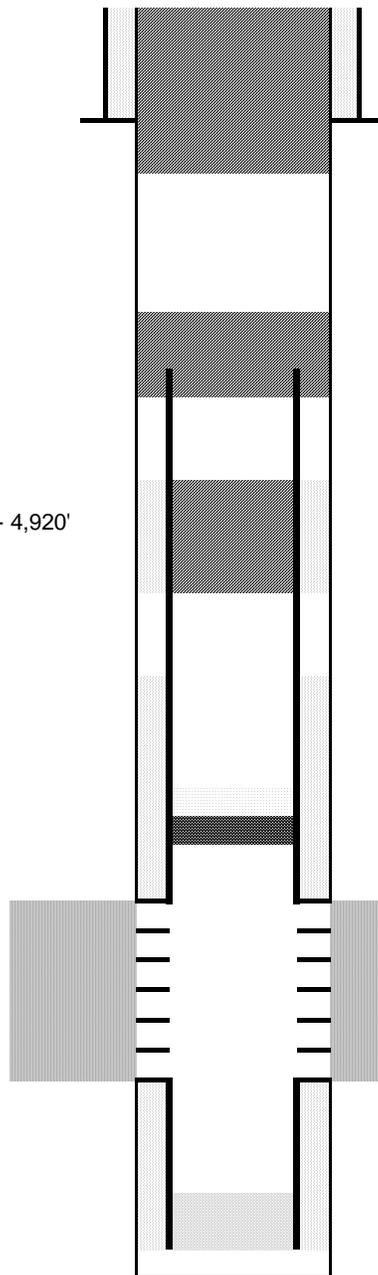

Cut surface casing off 6'-8' below surface.

Pump approx 165 sx shoe plug @ 425'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 75 sx balance plug @ 4,920'

CIBP @ 6,856' w/ 2 sx cement on top

Niobrara Perforations 6,906' - 7,000'

Codell Perforations 7,204' - 7,214'

TD: 7,316'