

**NOBLE ENERGY INC.**  
**LOUSTALET 15-01**  
**NWSW 15-5N-64W**  
**1972' FSL & 860' FWL**  
**WELD COUNTY, CO**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**8/14/2015**

API: 05-123-12923  
 COGCC #


GL Elev: 4576'  
 KB Elev: 4586'

Spud Date: 1/18/1986

**Surface Casing :**  
 8 5/8" 24# @ 293'  
 Cement: 250 sx  
 TOC: Surface

TOC @ 6005'

**Production Casing :**  
 4 1/2" 15.1# @ 6827'  
 Cement: 155 sx  
 TD: 1/25/1986

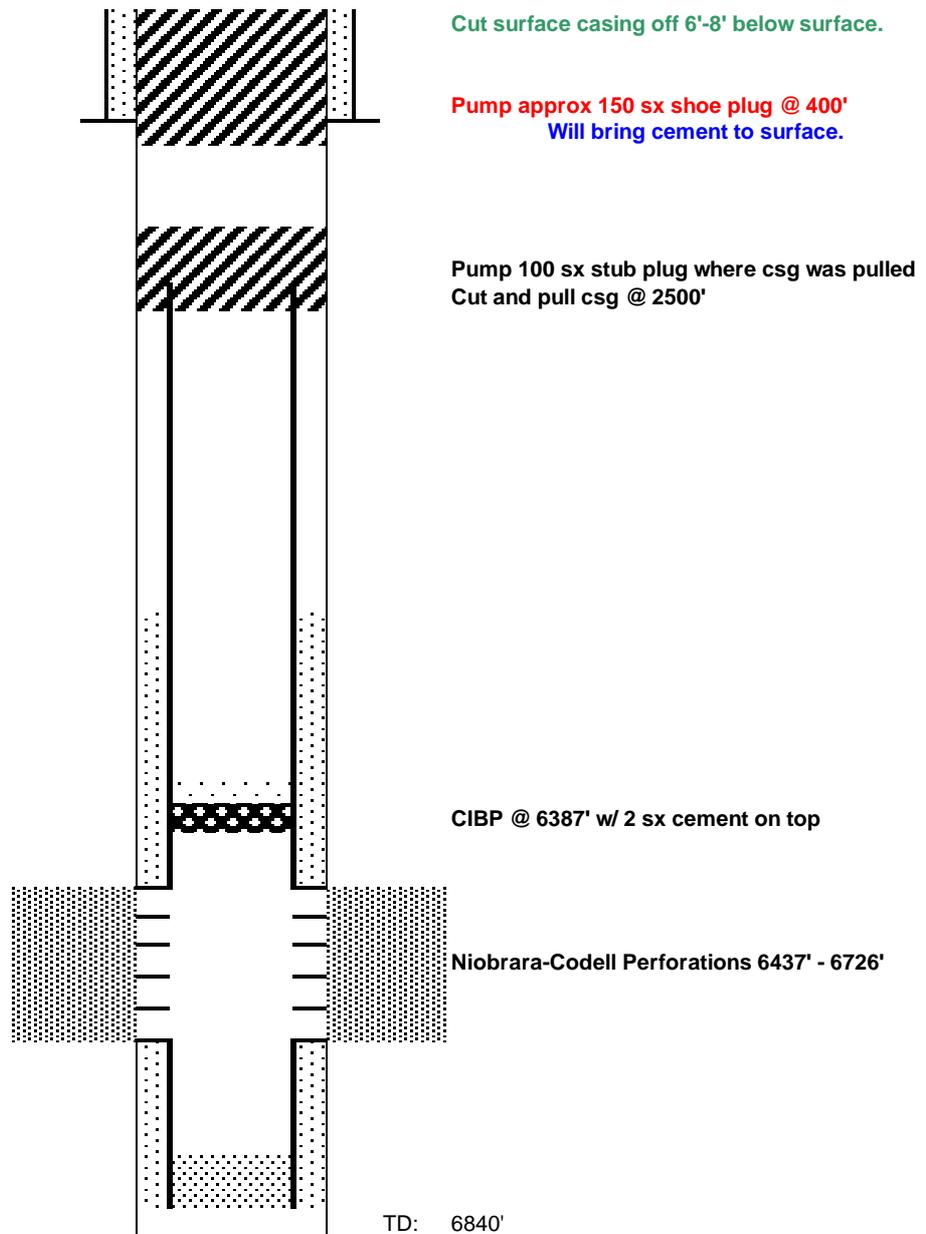

Cut surface casing off 6'-8' below surface.

Pump approx 150 sx shoe plug @ 400'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 6387' w/ 2 sx cement on top

Niobrara-Codell Perforations 6437' - 6726'

TD: 6840'