

**NOBLE ENERGY INC.**  
 Boedecker 40  
 CSSW 22-2N-64W  
 1320' FSL & 1320' FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 8/20/2015

API: 05-123-07818  
 COGCC #

GL Elev: 4993'  
 KB Elev: 5006'


**Spud Date:**

**Surface Casing :**  
 8 5/8" 24# K-55 @ 854'  
 Cement: 649  
 TOC: Surface

**TOC @ 6634'**

**Nio Top 6824'**

**Production Casing :**  
 4 1/2" 11.6# K-55 @ 7714'  
 Cement: 197  
 TD: 8/26/1973

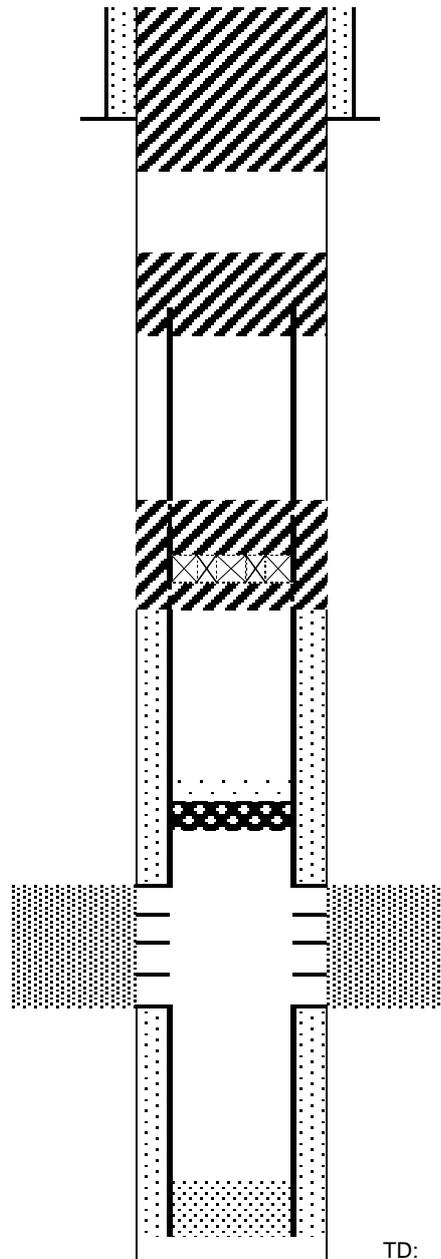

Cut surface casing off 6'-8' below surface.

Pump approx 365 sx shoe plug @ 1110'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

Perforate 4 1/2" casing @ 6474'  
 Pump 50 sx through and 5 sx on top  
 Set CICR @ 6524'  
 Perforate 4 1/2" casing @ 6624'

CIBP @ 7536' w/ 2 sx cement on top

J-Sand Perforations 7586' - 7610'

TD: 7716'