

NOBLE ENERGY INC.

Croissant 27-04G6

NWNW 27-6N-66W

661 FSL & 1962 FWL

WELD COUNTY, CO

Wattenberg

CURRENT WELLBORE SCHEMATIC

with PROPOSED P&A

9/1/2015

API: 05-123-18600
COGCC #

GL Elev: 4749'
KB Elev: 4760'

Spud Date: 10/14/1994

Surface Casing :

7" 17# H-40 @460'

Cement: 200

TOC: Surface

TOC @ 6174'


Nio top @ 6806'

Production Casing :

4 1/2" 11.60# I-80 @7259

Cement: 200

TD: 10/22/1994

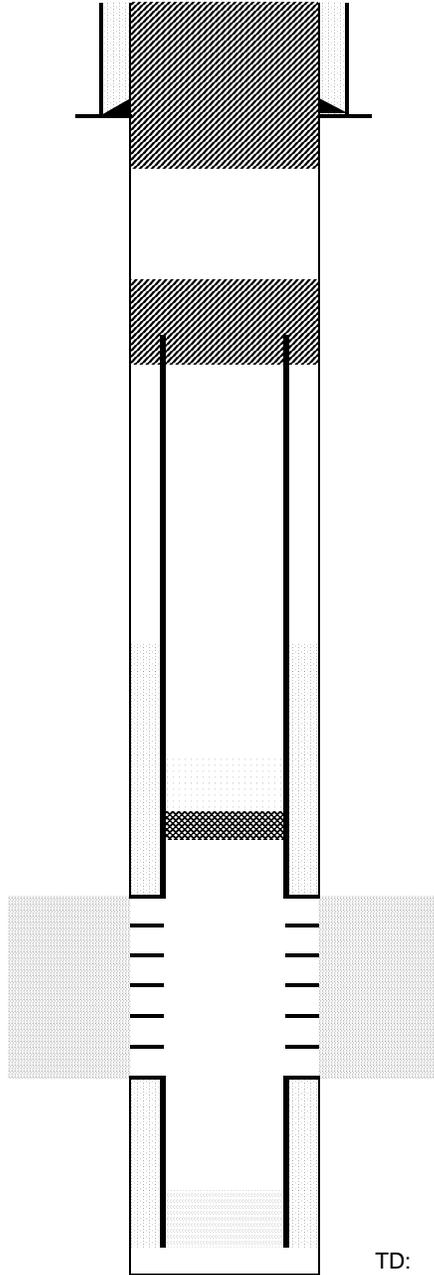

Cut surface casing off 6'-8' below surface.

Pump approx 140 sx shoe plug @ 660
Will bring cement to surface

Pump 100 sx courtesy plug where csg was pulle
Cut and pull csg @ 2500'

CIBP @ 7068' w/ 35 sx cement on top

Cordell Perforations 7118' - 7138

TD: 7259'