

NOBLE ENERGY INC.

Croissant 01-27

SWNW 27-6N-66W

661 FSL & 1962 FWL

WELD COUNTY, CO

Wattenberg

CURRENT WELLBORE SCHEMATIC

with PROPOSED P&A

9/2/2015

API: 05-123-10740
COGCC #

GL Elev: 4711'
KB Elev: 4723'

Spud Date: 10/14/1994

Surface Casing :

8 5/8" 24# @515'

Cement: 400

TOC: Surface


TOC @ 6488
Nio top @ 6813'

Production Casing :

4 1/2" 10.5# @ 7700'

Cement: 350

TD: 6/28/1982

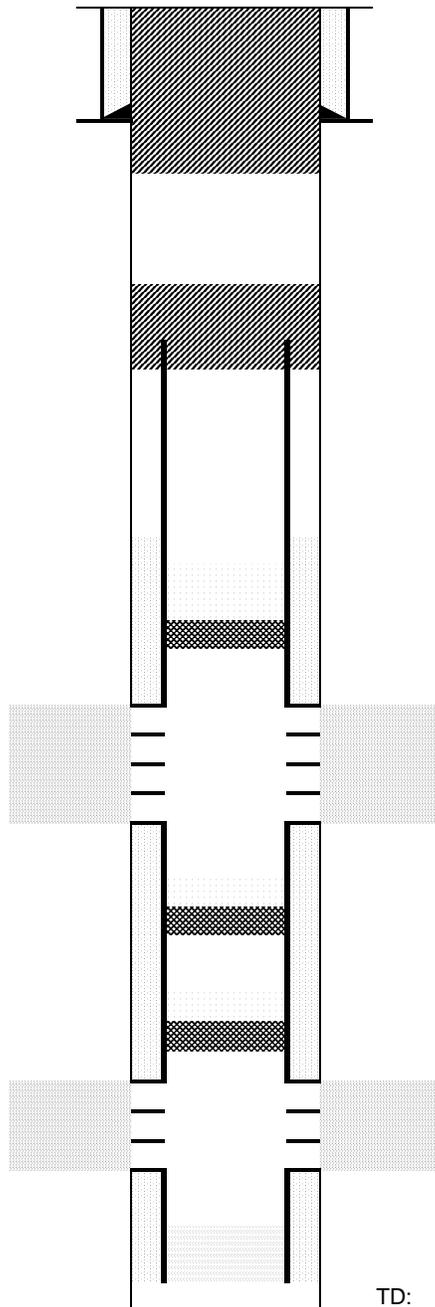

Cut surface casing off 6'-8' below surface.

Pump approx 217 sx shoe plug @ 615
Will bring cement to surface

Pump 100 sx courtesy plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 7068' and pump 36 sx cement on top

Cordell Perforations 7123' - 7141
Cordell Perforations 7128' - 7140

Cement plug @ 7199' - 7200'
Perm. Bridge plug @ 7200' - 7201'

Cement plug @ 7437' - 7348'
Perm. Bridge plug @ 7438' - 7439'

J sand Perforations 7596' - 7606

TD: 7700'