

**NOBLE ENERGY INC.**  
**RAY-GLO 4**  
**SEW 14-6N-64W**  
**2160 FNL & 1980 FWL**  
**WELD COUNTY, CO**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**9/8/2015**

API: 05-123-12988  
 COGCC #


GL Elev: 4707  
 KB Elev: 4720

Spud Date: 2/12/1986

Surface Casing :  
 8-5/8" 24# @ 419'  
 Cement: 250  
 TOC: 5924'

Nio Top @ 6546'

Production Casing :  
 4-1/2" 10.5# @ 7015'  
 Cement: 250  
 TD: 2/18/1986

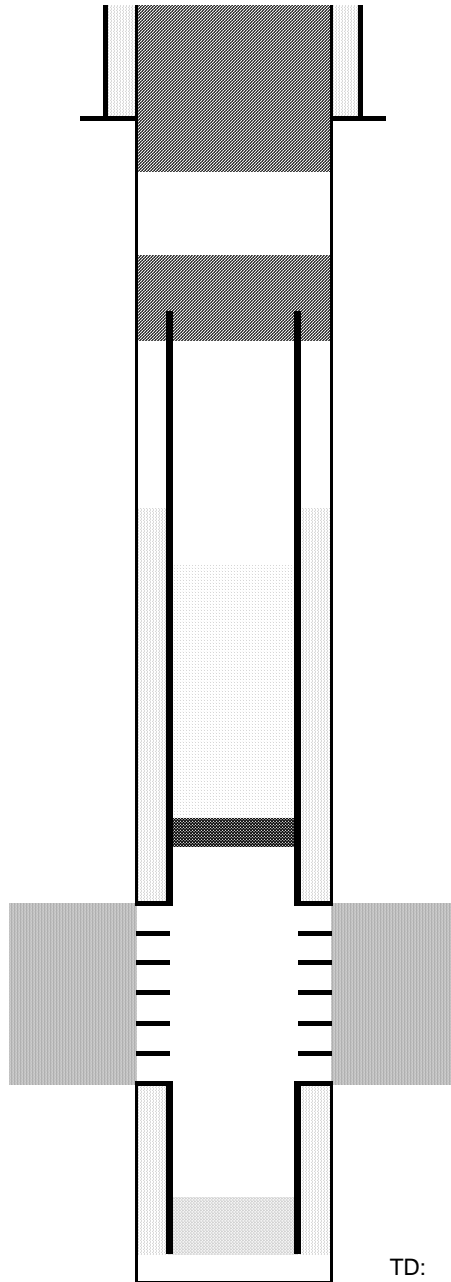

Cut surface casing off 6'-8' below surface.

Pump approx 215 sx shoe plug @ 630'  
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 6807' w/ 35 sx cement on top

Codell Perforations: 6,857' - 6,870'

TD: 7026