

NOBLE ENERGY INC.
 Faramir Farms 06-22
 SWNW 6-3N-64W
 760' FNL & 460' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 9/8/2015

API: 05-123-19812
 COGCC #

GL Elev: 4851'
 KB Elev: 4861'


Spud Date: 10/18/1999

Surface Casing :
 8 5/8" 24# J-55 @ 666'
 Cement: 460
 TOC: Surface

TOC @ 4200'

Nio Top 6815'

Production Casing :
 4 1/2" 11.6# N-80 @ 7243'
 Cement: 725
 TD: 10/24/1999

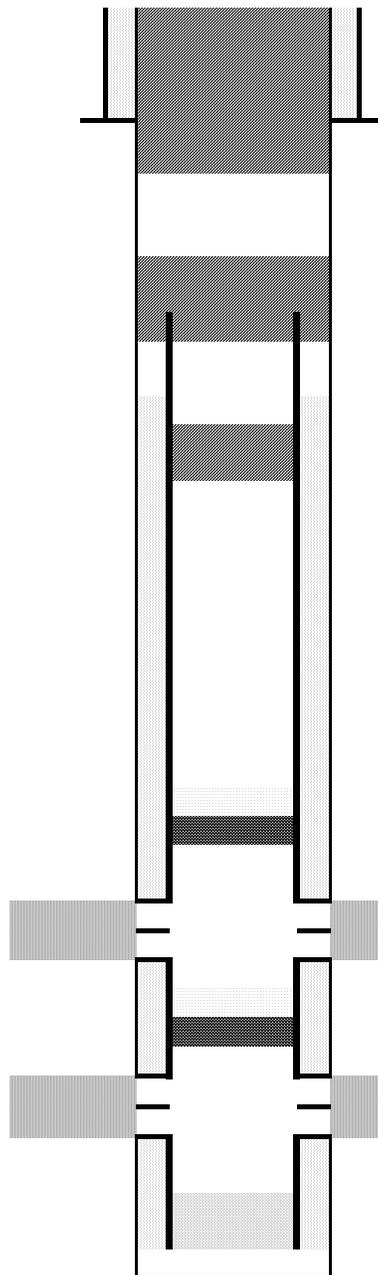

Cut surface casing off 6'-8' below surface.

Pump approx 240 sx shoe plug @ 766'
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 25 sx balance plug @ 4640'

CIBP @ 6768' w/ 2 sx cement on top

Niobrara Perforations 6818' - 6893'

CIBP @ 6976' w/ 2 sx cement on top (7/4/2008)

Codell Perforations 7090' - 7100' (Abandoned)

TD: 7257'