

NOBLE ENERGY INC.
 Eisenman 22-15
 SENW 15-5N-65W
 2100 FNL & 2170 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 9/11/2015

API: 05-123-17552
 COGCC #

GL Elev: 4635'
 KB Elev: 4645'

Spud Date: 11/8/1993

Surface Casing :


8 5/8" 24# @ 445'
 Cement: 285
 TOC: Surface

TOC @ 6172'

Nio Top 6700'

Production Casing :

2 7/8" 6.50# N-80 @ 7167'
 Cement: 225
 TD: 11/13/1993

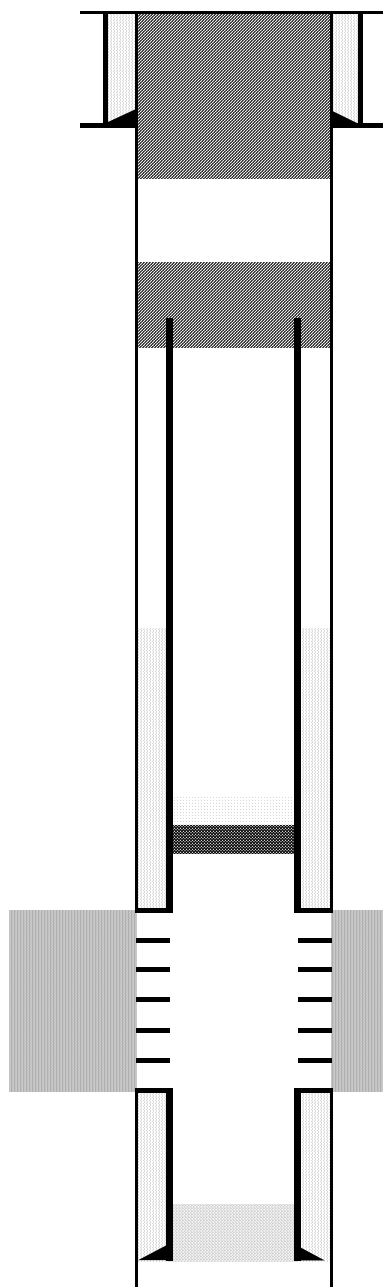

Cut surface casing off 6'-8' below surface.

Pump approx 172 sx shoe plug @ 495'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

3/28/2006: cut csg @ +/- 3015'
 TIH w/ csg patch
 unknown # of csg jts, PSI tested to 3000#

CIBP @ 6804' w/ 2 sx cement on top

Niobrara Perforations 6854' - 6860'

Codell Perforations 7026' - 7032'
 Codell Perforations 7025' - 7035'

TD: 7198'