

Proposed
Access Road for
Garden Creek 18 SESW

Proposed
Access Road

C-2.9'
El. 33.9'

Approx.
Top of
Cut Slope

FLARE
STACK

C-0.6'
El. 31.6'

250'

C-1.0'
El. 32.0'

Cut/Fill
Transition Line

#501-1807H

C-0.4'
El. 31.4'

#502-1807H

C-0.3'
El. 31.3'

F-0.2'
El. 30.8'

F-0.3'
El. 30.7'

Sta. 4+10

Sta. 2+95

Sta. 1+80

F-0.6'
El. 30.4'

F-0.8'
El. 30.2'

4

Cut/Fill
Transition Line

3

F-0.5'
El. 30.5'

Sta. 0+00

Approx.
Toe of
Fill Slope

FINISHED GRADE ELEVATION = 5231.0'

NOTES:

- Flare Stack is to be located a min. of 100' from the wellhead.
- Round corners at 35' radius or as needed.
- Construct diversion ditches as needed.
- Contours shown at 2' intervals.

EOG RESOURCES, INC.


GARDEN CREEK 18 SWSE
SW 1/4 SE 1/4, SECTION 18, T11N, R62W, 6th P.M.
WELD COUNTY, COLORADO



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

DRAWN BY: T.B.	DATE DRAWN: 05-13-15
SCALE: 1" = 60'	REVISED: 00-00-00
CONSTRUCTION LAYOUT	FIGURE #1

1" = 40'
X-Section
Scale
1" = 100'

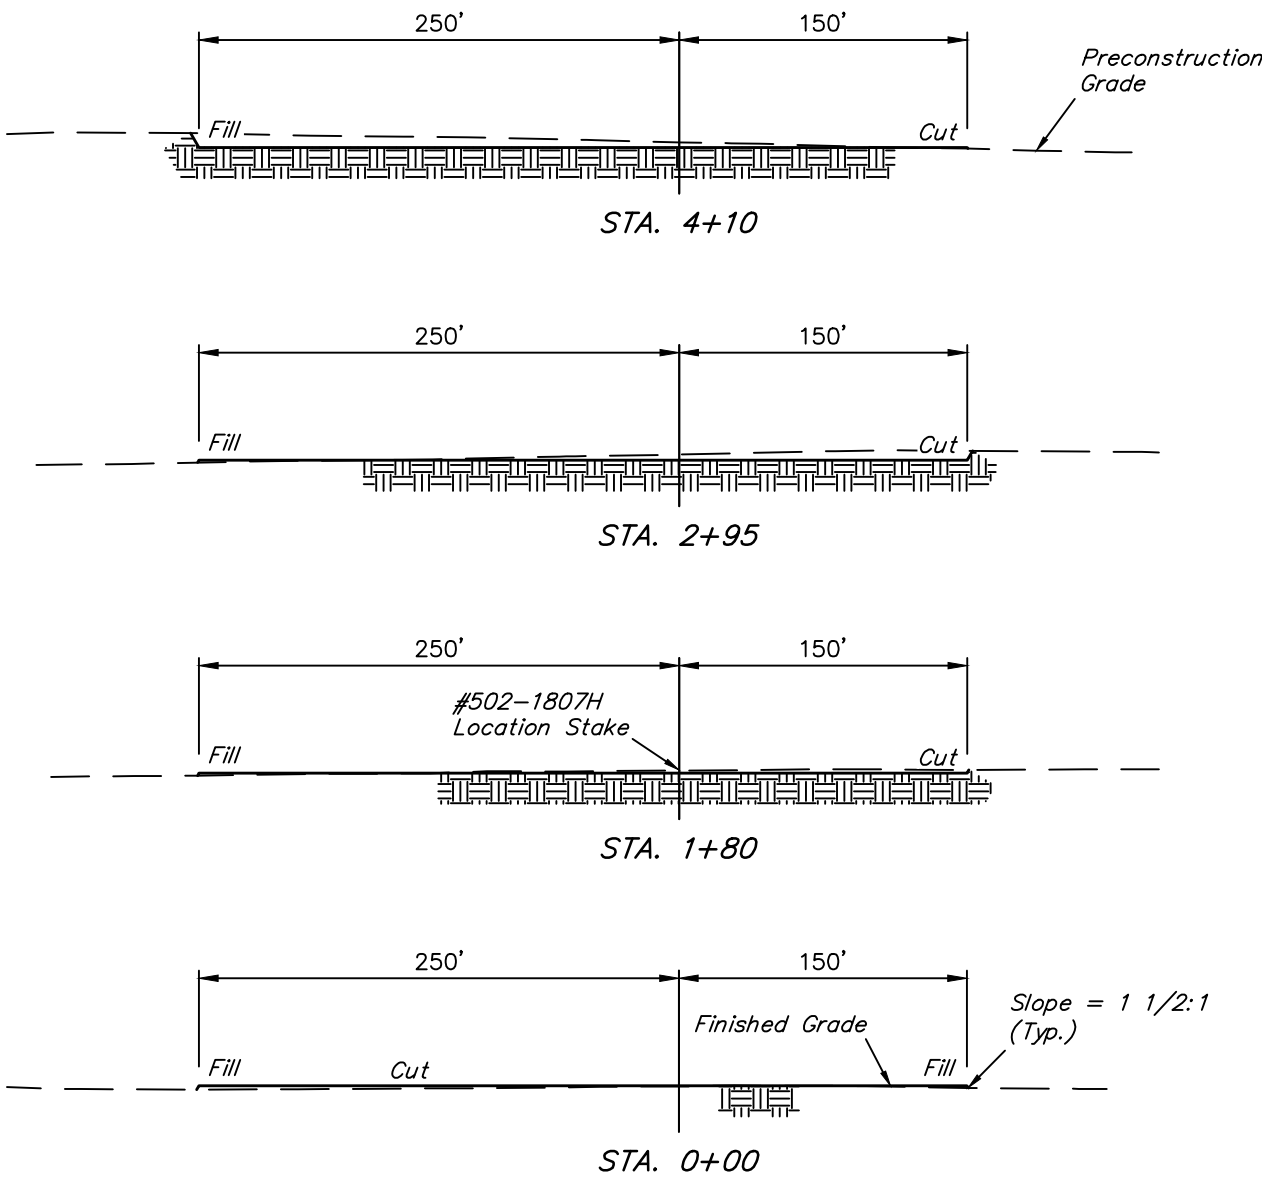

APPROXIMATE EARTHWORK QUANTITIES	
(6") TOPSOIL STRIPPING	3,080 Cu. Yds.
REMAINING LOCATION	1,940 Cu. Yds.
TOTAL CUT	5,020 Cu. Yds.
FILL	1,940 Cu. Yds.
EXCESS MATERIAL	3,080 Cu. Yds.
TOPSOIL	3,080 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	0 Cu. Yds.

APPROXIMATE SURFACE DISTURBANCE AREAS		
	DISTANCE	ACRES
WELL SITE DISTURBANCE	NA	±4.576
40' WIDE ACCESS ROAD R-O-W DISTURBANCE	±385'	±0.354
TOTAL SURFACE USE AREA		±4.930

- NOTES:**
- Fill quantity includes 5% for compaction.
 - Calculations based on 6" of topsoil stripping.
 - Topsoil should not be stripped below finished grade on substructure area.

EOG RESOURCES, INC.

**GARDEN CREEK 18 SWSE
SW 1/4 SE 1/4, SECTION 18, T11N, R62W, 6th P.M.
WELD COUNTY, COLORADO**



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

DRAWN BY: T.B.	DATE DRAWN: 05-13-15
SCALE: AS SHOWN	REVISED: 00-00-00
CONSTRUCTION LAYOUT CROSS SECTIONS	FIGURE #2