

NOBLE ENERGY INC.
 Petrikin A34-12
 NWSW 34-6N-64W
 1935 FSL & 660' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 9/30/2015

API: 05-123-13728
 COGCC #

GL Elev: 4647'
 KB Elev: 4658'


Spud Date: 12/26/1987

Surface Casing :
 8 5/8" 24# J-55 @ 297'
 Cement: 110
 TOC: Surface

TOC @ 5902'

Nio Top 6580'

Production Casing :
 4 1/2" 15.1# N-80 @ 6997'
 Cement: 220
 TD: 12/30/1987

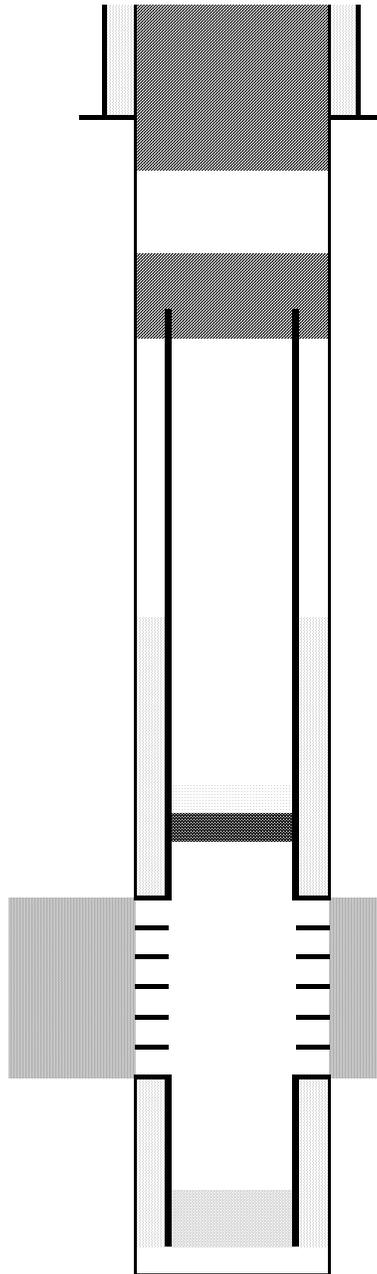

Cut surface casing off 6'-8' below surface.

Pump approx 260 sx shoe plug @ 850'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6532' w/ 2 sx cement on top

Niobrara Perforations 6582' - 6776'

Codell Perforations 6834' - 6843'

TD: 7006'