

NOBLE ENERGY INC.
 Stromberger 44-12
 SESE 12-4N-66W
 520 FSL & 540 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 10/9/2015

API: 05-123-16454

KB Elev: 4717'
 GL Elev: 4705'


Spud Date: 11/18/1992

Surface Casing :
 8 5/8", 24# @ 277'
 Cement: 195 sx
 TOC: Surface

TOC @ 3360'

TOC @ 5900'

Production Casing :
 4 1/2", 11.6#, WC-70 @ 7307'
 Cement: 340 & 180 sx
 Run Date: 11/23/1992

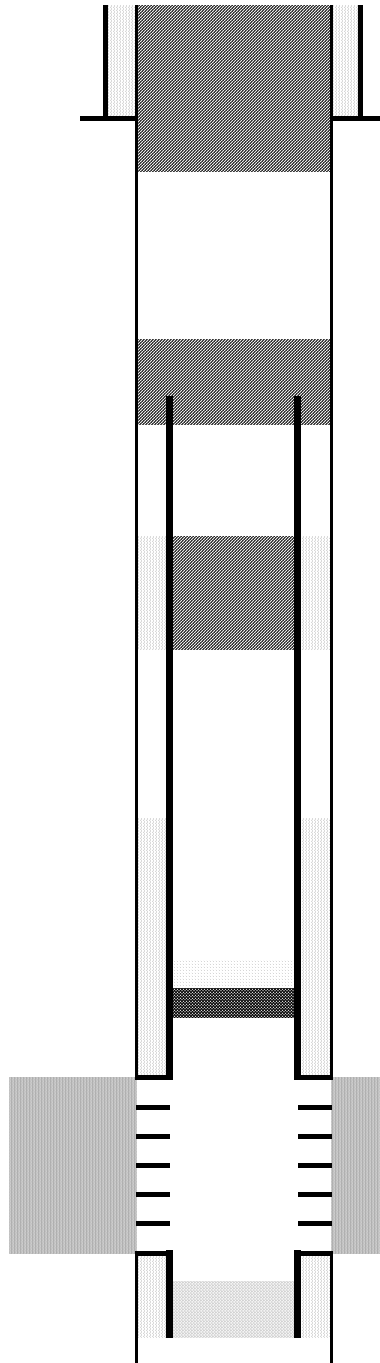

Cut surface casing off 6'-8' below surface.

Pump approx 135 sx shoe plug @ 377'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 70 sx balance plug from 4270' to 3360'

CIBP @ 6804' w/ 2 sx cement on top

Niobrara Perforations: 6854' - 6982'

Codell Perforations: 7162' - 7172'

TD: 7308'