

NOBLE ENERGY INC.
 Noffsinger 44-15
 SESE 15-4N-66W
 465 FSL & 670 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 10/20/2015

API: 05-123-16529

KB Elev: 4741'
 GL Elev: 4729'


Spud Date: 2/5/1993

Surface Casing :
 8 5/8", 24# @ 300'
 Cement: 240 sx
 TOC: Surface

TOC @ 3540'

TOC @ 6605'

Production Casing :
 4 1/2", 11.6#, M-75 @ 7325'
 Cement: 400+235 sx
 Run Date: 2/10/1993

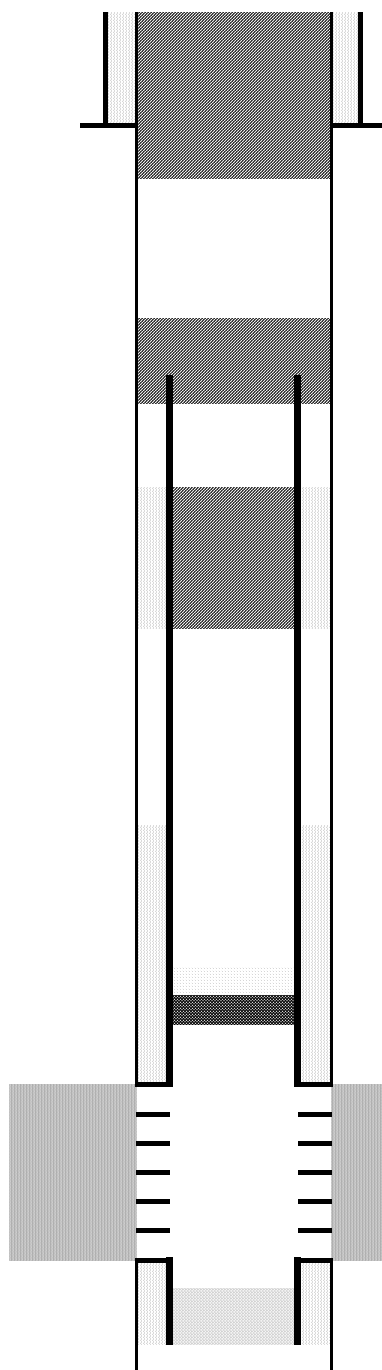

Cut surface casing off 6'-8' below surface.

Pump approx 170 sx shoe plug @ 450'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 105 sx balance plug from 4900' - 3540'

CIBP @ 6873' w/ 2 sx cement on top

Niobrara Perforations: 6923' - 7040'

Codell Perforations: 7201' - 7217'

TD: 7331'