

**NOBLE ENERGY INC.**  
AUFRECHT N02-08  
NWNE 2-5N-67W  
917 FNL & 1951 FEL  
WELD COUNTY, CO  
Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
with PROPOSED P&A  
10/21/2015

API: 05-123-24247  
COGCC #

GL Elev: 4896'  
KB Elev: 4908'


Spud Date: 10/11/2006

**Surface Casing :**  
8 5/8", 24.0# J-55 @ 634'  
Cement: 270  
TOC: Surface

TOC @ 2180'

Nio Top 7160'

**Production Casing :**  
4 1/2", 11.60# M-80 @ 7648'  
Cement: 970  
TD: 10/18/2006

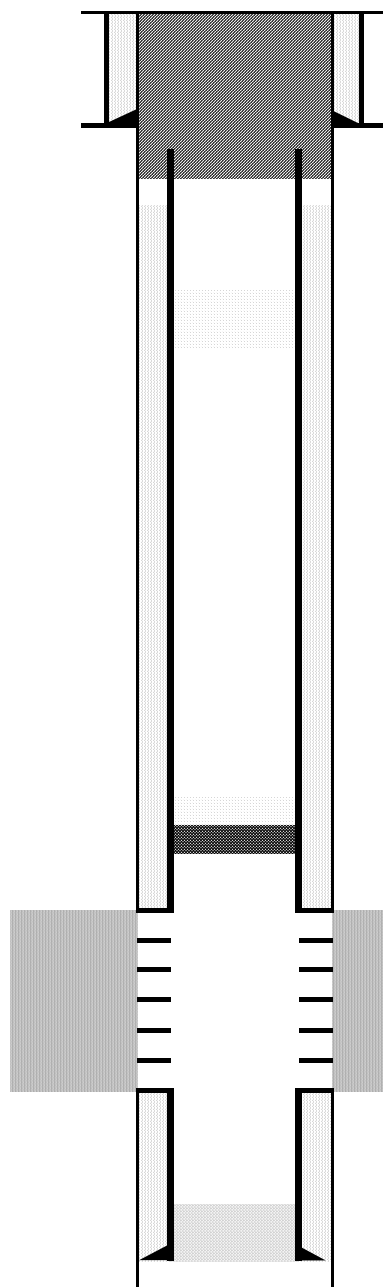

Cut surface casing off 6'-8' below surface.

Pump approx 300 sx shoe plug @ 890'  
Will bring cement to surface.

Cut and pull csg @ 890'

Pump 10 sx balance plug @ +/- 2500'

CIBP @ 7130' w/ 2 sx cement on top

Niobrara Perforations 7180 - 7194'  
Niobrara Perforations 7298' - 7316'  
Codell Perforations 7479' - 7491'

TD: 7660'