



Project: Weld County, CO  
Site: Sec 12-T10N-R58W  
Well: Razor #12H-0116B  
Wellbore: Hz  
Design: APD

PROJECT DETAILS: Weld County, CO  
Geodetic System: US State Plane 1983  
Datum: North American Datum 1983  
Ellipsoid: GRS 1980  
Zone: Colorado Northern Zone  
System Datum: Mean Sea Level



Azimuths to True North  
Magnetic North: 7.90°  
Magnetic Field  
Strength: 52918.7snT  
Dip Angle: 67.41°  
Date: 10/1/2015  
Model: IGRF2015

#### WELL DETAILS: Razor #12H-0116B


+N/-S	+E/-W	Northing	Ground Level:	4947.00	Longitude	Slot
0.00	0.00	1558418.17	Easting	3468455.72	40° 51' 14.240 N	103° 48' 23.590 W

#### SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	
3	638.10	10.14	142.60	636.33	-23.71	18.13	3.00	142.60	-22.47	
4	4631.67	10.14	142.60	4567.50	-582.43	445.27	0.00	0.00	-551.90	
5	5138.82	0.00	0.00	5072.00	-618.00	472.46	2.00	180.00	-585.61	
6	5338.82	0.00	0.00	5272.00	-618.00	472.46	0.00	0.00	-585.61	
7	6157.21	90.00	0.00	5793.00	-97.00	472.46	11.00	0.00	-65.74	
8	13425.76	90.00	0.00	5793.00	7171.56	472.46	0.00	0.00	7187.10	PBHL 0116B

TVDPath	MDPath	Formation
1600.00	1617.06	Upper Pierre
3500.00	3547.23	Hygiene
3650.00	3699.61	Lower Pierre
5676.00	5801.16	P200 Marker
5707.00	5853.58	P300 Marker
5721.00	5880.04	P350 Marker
5730.00	5898.34	Sharon Springs
5737.00	5913.43	Niobrara
5759.00	5967.94	Top A Chalk

#### West(-)/East(+) (1500 usft/in)

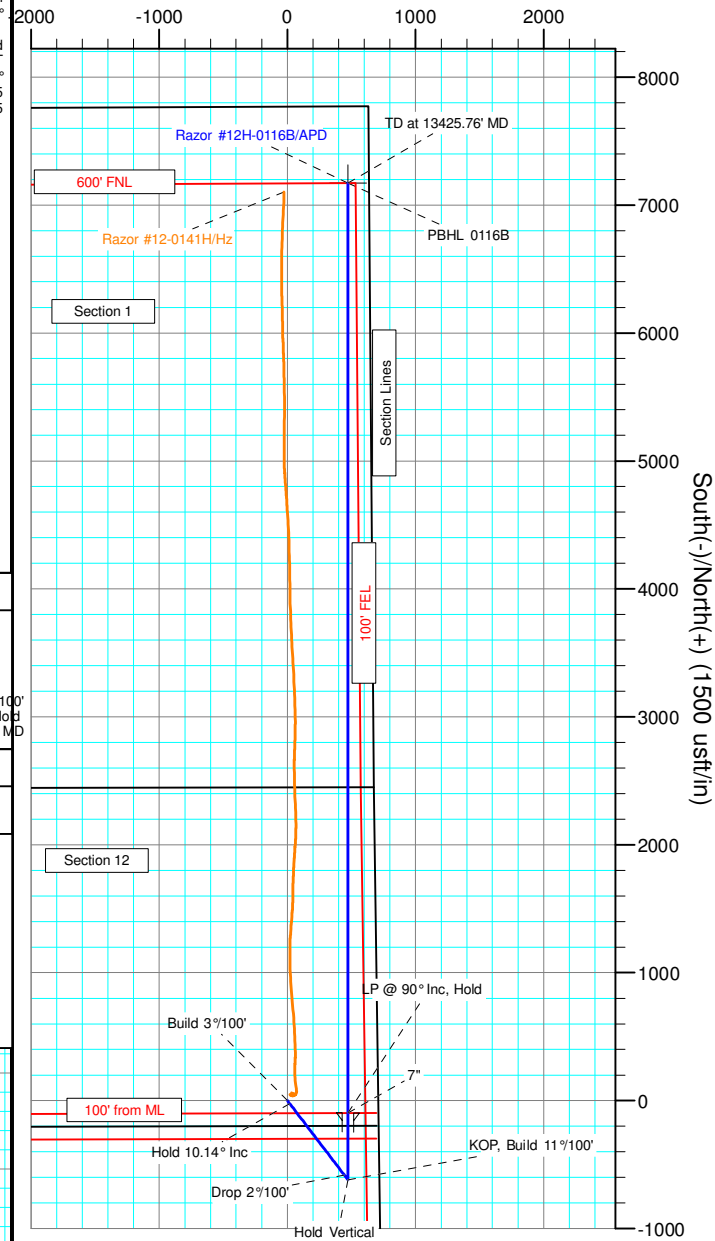

South(-)/North(+) (1500 usft/in)

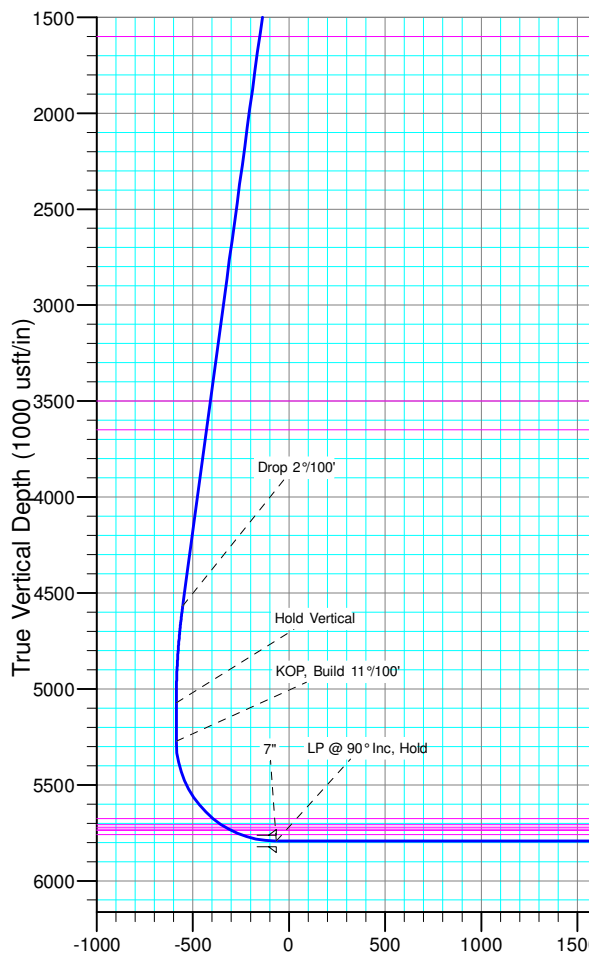

#### ANNOTATIONS

TVD	MD	Inc	Azi	+N/-S	+E/-W	VSect	Departure	Annotation
300.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	Build 3\"/>
636.33	638.10	10.14	142.60	-23.71	18.13	-22.47	29.85	Hold 10.14\"/>
4567.50	4631.67	10.14	142.60	-582.43	445.27	-551.90	733.14	Drop 2\"/>
5072.00	5138.82	0.00	0.00	-618.00	472.46	-585.61	777.91	Hold Vertical
5272.00	5338.82	0.00	0.00	-618.00	472.46	-585.61	777.91	KOP, Build 11\"/>
5793.00	6157.21	90.00	0.00	-97.00	472.46	-65.74	1298.91	LP @ 90\"/>
5793.00	13425.76	90.00	0.00	7171.56	472.46	7187.10	8567.47	TD at 13425.76' MD

#### DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
PBHL 0116B	5793.00	7171.56	472.46	1565597.45	3468791.15	40° 52' 25.100 N	103° 48' 17.440 W

SHL:  
2449' FNL, 695' FEL  
Sec12-T10N-R58W

BHL:  
600' FSL, 165' FWL  
Sec1-T10N-R58W

7\"/>

Vertical Section at 3.77° (1000 usft/in)



# **Whiting Petroleum Corp.**

**Weld County, CO  
Sec 12-T10N-R58W  
Razor #12H-0116B**

**Hz**

**Plan: APD**

## **Standard Planning Report**

**01 October, 2015**



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Razor #12H-0116B
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4968.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4968.00usft
<b>Site:</b>	Sec 12-T10N-R58W	<b>North Reference:</b>	True
<b>Well:</b>	Razor #12H-0116B	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	APD		

<b>Project</b>	Weld County, CO		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Colorado Northern Zone		

Site		Sec 12-T10N-R58W			
Site Position:		Northing:	1,560,767.76 usft	Latitude:	40° 51' 38.329 N
From:	Lat/Long	Easting:	3,463,779.63 usft	Longitude:	103° 49' 23.851 W
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in	Grid Convergence:	1.08 °

Well		Razor #12H-0116B				
Well Position	+N/-S	-2,437.57 usft	Northing:	1,558,418.18 usft	Latitude:	40° 51' 14.240 N
	+E/-W	4,630.83 usft	Easting:	3,468,455.72 usft	Longitude:	103° 48' 23.590 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	4,947.00 usft

<b>Wellbore</b>	Hz				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2015	10/1/2015	7.90	67.41	52,919

<b>Design</b>	APD			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.00
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>
	0.00	0.00	0.00	3.77

<b>Plan Sections</b>										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
638.10	10.14	142.60	636.33	-23.71	18.13	3.00	3.00	0.00	142.60	
4,631.68	10.14	142.60	4,567.50	-582.43	445.27	0.00	0.00	0.00	0.00	
5,138.82	0.00	0.00	5,072.00	-618.00	472.46	2.00	-2.00	0.00	180.00	
5,338.82	0.00	0.00	5,272.00	-618.00	472.46	0.00	0.00	0.00	0.00	
6,157.21	90.00	0.00	5,793.00	-97.00	472.46	11.00	11.00	0.00	0.00	
13,425.76	90.00	0.00	5,793.00	7,171.56	472.46	0.00	0.00	0.00	0.00	PBHL 0116B



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Razor #12H-0116B
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4968.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4968.00usft
<b>Site:</b>	Sec 12-T10N-R58W	<b>North Reference:</b>	True
<b>Well:</b>	Razor #12H-0116B	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	APD		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Build 3°/100'</b>									
400.00	3.00	142.60	399.95	-2.08	1.59	-1.97	3.00	3.00	0.00
500.00	6.00	142.60	499.63	-8.31	6.35	-7.88	3.00	3.00	0.00
600.00	9.00	142.60	598.77	-18.68	14.28	-17.70	3.00	3.00	0.00
638.10	10.14	142.60	636.33	-23.71	18.13	-22.47	3.00	3.00	0.00
<b>Hold 10.14° Inc</b>									
700.00	10.14	142.60	697.27	-32.37	24.75	-30.68	0.00	0.00	0.00
800.00	10.14	142.60	795.71	-46.36	35.44	-43.93	0.00	0.00	0.00
900.00	10.14	142.60	894.14	-60.35	46.14	-57.19	0.00	0.00	0.00
1,000.00	10.14	142.60	992.58	-74.34	56.84	-70.45	0.00	0.00	0.00
1,100.00	10.14	142.60	1,091.02	-88.33	67.53	-83.70	0.00	0.00	0.00
1,200.00	10.14	142.60	1,189.46	-102.33	78.23	-96.96	0.00	0.00	0.00
1,300.00	10.14	142.60	1,287.89	-116.32	88.92	-110.22	0.00	0.00	0.00
1,400.00	10.14	142.60	1,386.33	-130.31	99.62	-123.48	0.00	0.00	0.00
1,500.00	10.14	142.60	1,484.77	-144.30	110.31	-136.73	0.00	0.00	0.00
1,600.00	10.14	142.60	1,583.20	-158.29	121.01	-149.99	0.00	0.00	0.00
1,617.06	10.14	142.60	1,600.00	-160.67	122.84	-152.25	0.00	0.00	0.00
<b>Upper Pierre</b>									
1,700.00	10.14	142.60	1,681.64	-172.28	131.71	-163.25	0.00	0.00	0.00
1,800.00	10.14	142.60	1,780.08	-186.27	142.40	-176.50	0.00	0.00	0.00
1,900.00	10.14	142.60	1,878.52	-200.26	153.10	-189.76	0.00	0.00	0.00
2,000.00	10.14	142.60	1,976.95	-214.25	163.79	-203.02	0.00	0.00	0.00
2,100.00	10.14	142.60	2,075.39	-228.24	174.49	-216.28	0.00	0.00	0.00
2,200.00	10.14	142.60	2,173.83	-242.23	185.18	-229.53	0.00	0.00	0.00
2,300.00	10.14	142.60	2,272.26	-256.22	195.88	-242.79	0.00	0.00	0.00
2,400.00	10.14	142.60	2,370.70	-270.21	206.58	-256.05	0.00	0.00	0.00
2,500.00	10.14	142.60	2,469.14	-284.20	217.27	-269.30	0.00	0.00	0.00
2,600.00	10.14	142.60	2,567.58	-298.19	227.97	-282.56	0.00	0.00	0.00
2,700.00	10.14	142.60	2,666.01	-312.18	238.66	-295.82	0.00	0.00	0.00
2,800.00	10.14	142.60	2,764.45	-326.17	249.36	-309.08	0.00	0.00	0.00
2,900.00	10.14	142.60	2,862.89	-340.16	260.05	-322.33	0.00	0.00	0.00
3,000.00	10.14	142.60	2,961.32	-354.15	270.75	-335.59	0.00	0.00	0.00
3,100.00	10.14	142.60	3,059.76	-368.14	281.44	-348.85	0.00	0.00	0.00
3,200.00	10.14	142.60	3,158.20	-382.13	292.14	-362.11	0.00	0.00	0.00
3,300.00	10.14	142.60	3,256.64	-396.12	302.84	-375.36	0.00	0.00	0.00
3,400.00	10.14	142.60	3,355.07	-410.11	313.53	-388.62	0.00	0.00	0.00
3,500.00	10.14	142.60	3,453.51	-424.10	324.23	-401.88	0.00	0.00	0.00
3,547.23	10.14	142.60	3,500.00	-430.71	329.28	-408.14	0.00	0.00	0.00
<b>Hygiene</b>									
3,600.00	10.14	142.60	3,551.95	-438.10	334.92	-415.13	0.00	0.00	0.00
3,699.61	10.14	142.60	3,650.00	-452.03	345.58	-428.34	0.00	0.00	0.00
<b>Lower Pierre</b>									
3,700.00	10.14	142.60	3,650.38	-452.09	345.62	-428.39	0.00	0.00	0.00
3,800.00	10.14	142.60	3,748.82	-466.08	356.31	-441.65	0.00	0.00	0.00
3,900.00	10.14	142.60	3,847.26	-480.07	367.01	-454.91	0.00	0.00	0.00
4,000.00	10.14	142.60	3,945.70	-494.06	377.71	-468.16	0.00	0.00	0.00
4,100.00	10.14	142.60	4,044.13	-508.05	388.40	-481.42	0.00	0.00	0.00
4,200.00	10.14	142.60	4,142.57	-522.04	399.10	-494.68	0.00	0.00	0.00
4,300.00	10.14	142.60	4,241.01	-536.03	409.79	-507.93	0.00	0.00	0.00
4,400.00	10.14	142.60	4,339.44	-550.02	420.49	-521.19	0.00	0.00	0.00



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Razor #12H-0116B
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4968.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4968.00usft
<b>Site:</b>	Sec 12-T10N-R58W	<b>North Reference:</b>	True
<b>Well:</b>	Razor #12H-0116B	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	APD		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,500.00	10.14	142.60	4,437.88	-564.01	431.18	-534.45	0.00	0.00	0.00
4,600.00	10.14	142.60	4,536.32	-578.00	441.88	-547.71	0.00	0.00	0.00
4,631.68	10.14	142.60	4,567.50	-582.43	445.27	-551.90	0.00	0.00	0.00
<b>Drop 2°/100'</b>									
4,700.00	8.78	142.60	4,634.89	-591.35	452.09	-560.36	2.00	-2.00	0.00
4,800.00	6.78	142.60	4,733.97	-602.10	460.31	-570.54	2.00	-2.00	0.00
4,900.00	4.78	142.60	4,833.45	-610.10	466.42	-578.12	2.00	-2.00	0.00
5,000.00	2.78	142.60	4,933.23	-615.33	470.42	-583.08	2.00	-2.00	0.00
5,100.00	0.78	142.60	5,033.18	-617.79	472.30	-585.41	2.00	-2.00	0.00
5,138.82	0.00	0.00	5,072.00	-618.00	472.46	-585.61	2.00	-2.00	0.00
<b>Hold Vertical</b>									
5,200.00	0.00	0.00	5,133.18	-618.00	472.46	-585.61	0.00	0.00	0.00
5,300.00	0.00	0.00	5,233.18	-618.00	472.46	-585.61	0.00	0.00	0.00
5,338.82	0.00	0.00	5,272.00	-618.00	472.46	-585.61	0.00	0.00	0.00
<b>KOP, Build 11°/100'</b>									
5,350.00	1.23	0.00	5,283.18	-617.88	472.46	-585.49	11.00	11.00	0.00
5,400.00	6.73	0.00	5,333.04	-614.41	472.46	-582.03	11.00	11.00	0.00
5,450.00	12.23	0.00	5,382.34	-606.18	472.46	-573.82	11.00	11.00	0.00
5,500.00	17.73	0.00	5,430.62	-593.27	472.46	-560.93	11.00	11.00	0.00
5,550.00	23.22	0.00	5,477.44	-575.78	472.46	-543.48	11.00	11.00	0.00
5,600.00	28.72	0.00	5,522.38	-553.90	472.46	-521.64	11.00	11.00	0.00
5,650.00	34.22	0.00	5,565.00	-527.80	472.46	-495.61	11.00	11.00	0.00
5,700.00	39.72	0.00	5,604.94	-497.74	472.46	-465.61	11.00	11.00	0.00
5,750.00	45.22	0.00	5,641.80	-464.00	472.46	-431.94	11.00	11.00	0.00
5,800.00	50.72	0.00	5,675.27	-426.87	472.46	-394.89	11.00	11.00	0.00
5,801.16	50.84	0.00	5,676.00	-425.98	472.46	-394.00	11.00	11.00	0.00
<b>P200 Marker</b>									
5,850.00	56.22	0.00	5,705.02	-386.71	472.46	-354.82	11.00	11.00	0.00
5,853.58	56.61	0.00	5,707.00	-383.73	472.46	-351.85	11.00	11.00	0.00
<b>P300 Marker</b>									
5,880.05	59.52	0.00	5,721.00	-361.27	472.46	-329.44	11.00	11.00	0.00
<b>P350 Marker</b>									
5,898.34	61.53	0.00	5,730.00	-345.35	472.46	-313.55	11.00	11.00	0.00
<b>Sharon Springs</b>									
5,900.00	61.71	0.00	5,730.79	-343.89	472.46	-312.09	11.00	11.00	0.00
5,913.43	63.19	0.00	5,737.00	-331.98	472.46	-300.21	11.00	11.00	0.00
<b>Niobrara</b>									
5,950.00	67.21	0.00	5,752.34	-298.79	472.46	-267.09	11.00	11.00	0.00
5,967.94	69.19	0.00	5,759.00	-282.13	472.46	-250.46	11.00	11.00	0.00
<b>Top A Chalk</b>									
6,000.00	72.71	0.00	5,769.46	-251.83	472.46	-220.23	11.00	11.00	0.00
6,050.00	78.21	0.00	5,782.01	-203.45	472.46	-171.96	11.00	11.00	0.00
6,100.00	83.71	0.00	5,789.86	-154.09	472.46	-122.70	11.00	11.00	0.00
6,150.00	89.21	0.00	5,792.95	-104.21	472.46	-72.93	11.00	11.00	0.00
6,157.21	90.00	0.00	5,793.00	-97.00	472.46	-65.73	10.99	10.99	0.00
<b>LP @ 90° Inc, Hold - 7"</b>									
6,200.00	90.00	0.00	5,793.00	-54.21	472.46	-23.03	0.00	0.00	0.00
6,300.00	90.00	0.00	5,793.00	45.79	472.46	76.75	0.00	0.00	0.00
6,400.00	90.00	0.00	5,793.00	145.79	472.46	176.53	0.00	0.00	0.00
6,500.00	90.00	0.00	5,793.00	245.79	472.46	276.32	0.00	0.00	0.00
6,600.00	90.00	0.00	5,793.00	345.79	472.46	376.10	0.00	0.00	0.00
6,700.00	90.00	0.00	5,793.00	445.79	472.46	475.88	0.00	0.00	0.00



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Razor #12H-0116B
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4968.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4968.00usft
<b>Site:</b>	Sec 12-T10N-R58W	<b>North Reference:</b>	True
<b>Well:</b>	Razor #12H-0116B	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	HZ		
<b>Design:</b>	APD		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
6,800.00	90.00	0.00	5,793.00	545.79	472.46	575.67	0.00	0.00	0.00
6,900.00	90.00	0.00	5,793.00	645.79	472.46	675.45	0.00	0.00	0.00
7,000.00	90.00	0.00	5,793.00	745.79	472.46	775.24	0.00	0.00	0.00
7,100.00	90.00	0.00	5,793.00	845.79	472.46	875.02	0.00	0.00	0.00
7,200.00	90.00	0.00	5,793.00	945.79	472.46	974.80	0.00	0.00	0.00
7,300.00	90.00	0.00	5,793.00	1,045.79	472.46	1,074.59	0.00	0.00	0.00
7,400.00	90.00	0.00	5,793.00	1,145.79	472.46	1,174.37	0.00	0.00	0.00
7,500.00	90.00	0.00	5,793.00	1,245.79	472.46	1,274.15	0.00	0.00	0.00
7,600.00	90.00	0.00	5,793.00	1,345.79	472.46	1,373.94	0.00	0.00	0.00
7,700.00	90.00	0.00	5,793.00	1,445.79	472.46	1,473.72	0.00	0.00	0.00
7,800.00	90.00	0.00	5,793.00	1,545.79	472.46	1,573.51	0.00	0.00	0.00
7,900.00	90.00	0.00	5,793.00	1,645.79	472.46	1,673.29	0.00	0.00	0.00
8,000.00	90.00	0.00	5,793.00	1,745.79	472.46	1,773.07	0.00	0.00	0.00
8,100.00	90.00	0.00	5,793.00	1,845.79	472.46	1,872.86	0.00	0.00	0.00
8,200.00	90.00	0.00	5,793.00	1,945.79	472.46	1,972.64	0.00	0.00	0.00
8,300.00	90.00	0.00	5,793.00	2,045.79	472.46	2,072.42	0.00	0.00	0.00
8,400.00	90.00	0.00	5,793.00	2,145.79	472.46	2,172.21	0.00	0.00	0.00
8,500.00	90.00	0.00	5,793.00	2,245.79	472.46	2,271.99	0.00	0.00	0.00
8,600.00	90.00	0.00	5,793.00	2,345.79	472.46	2,371.78	0.00	0.00	0.00
8,700.00	90.00	0.00	5,793.00	2,445.79	472.46	2,471.56	0.00	0.00	0.00
8,800.00	90.00	0.00	5,793.00	2,545.79	472.46	2,571.34	0.00	0.00	0.00
8,900.00	90.00	0.00	5,793.00	2,645.79	472.46	2,671.13	0.00	0.00	0.00
9,000.00	90.00	0.00	5,793.00	2,745.79	472.46	2,770.91	0.00	0.00	0.00
9,100.00	90.00	0.00	5,793.00	2,845.79	472.46	2,870.69	0.00	0.00	0.00
9,200.00	90.00	0.00	5,793.00	2,945.79	472.46	2,970.48	0.00	0.00	0.00
9,300.00	90.00	0.00	5,793.00	3,045.79	472.46	3,070.26	0.00	0.00	0.00
9,400.00	90.00	0.00	5,793.00	3,145.79	472.46	3,170.05	0.00	0.00	0.00
9,500.00	90.00	0.00	5,793.00	3,245.79	472.46	3,269.83	0.00	0.00	0.00
9,600.00	90.00	0.00	5,793.00	3,345.79	472.46	3,369.61	0.00	0.00	0.00
9,700.00	90.00	0.00	5,793.00	3,445.79	472.46	3,469.40	0.00	0.00	0.00
9,800.00	90.00	0.00	5,793.00	3,545.79	472.46	3,569.18	0.00	0.00	0.00
9,900.00	90.00	0.00	5,793.00	3,645.79	472.46	3,668.96	0.00	0.00	0.00
10,000.00	90.00	0.00	5,793.00	3,745.79	472.46	3,768.75	0.00	0.00	0.00
10,100.00	90.00	0.00	5,793.00	3,845.79	472.46	3,868.53	0.00	0.00	0.00
10,200.00	90.00	0.00	5,793.00	3,945.79	472.46	3,968.32	0.00	0.00	0.00
10,300.00	90.00	0.00	5,793.00	4,045.79	472.46	4,068.10	0.00	0.00	0.00
10,400.00	90.00	0.00	5,793.00	4,145.79	472.46	4,167.88	0.00	0.00	0.00
10,500.00	90.00	0.00	5,793.00	4,245.79	472.46	4,267.67	0.00	0.00	0.00
10,600.00	90.00	0.00	5,793.00	4,345.79	472.46	4,367.45	0.00	0.00	0.00
10,700.00	90.00	0.00	5,793.00	4,445.79	472.46	4,467.23	0.00	0.00	0.00
10,800.00	90.00	0.00	5,793.00	4,545.79	472.46	4,567.02	0.00	0.00	0.00
10,900.00	90.00	0.00	5,793.00	4,645.79	472.46	4,666.80	0.00	0.00	0.00
11,000.00	90.00	0.00	5,793.00	4,745.79	472.46	4,766.59	0.00	0.00	0.00
11,100.00	90.00	0.00	5,793.00	4,845.79	472.46	4,866.37	0.00	0.00	0.00
11,200.00	90.00	0.00	5,793.00	4,945.79	472.46	4,966.15	0.00	0.00	0.00
11,300.00	90.00	0.00	5,793.00	5,045.79	472.46	5,065.94	0.00	0.00	0.00
11,400.00	90.00	0.00	5,793.00	5,145.79	472.46	5,165.72	0.00	0.00	0.00
11,500.00	90.00	0.00	5,793.00	5,245.79	472.46	5,265.50	0.00	0.00	0.00
11,600.00	90.00	0.00	5,793.00	5,345.79	472.46	5,365.29	0.00	0.00	0.00
11,700.00	90.00	0.00	5,793.00	5,445.79	472.46	5,465.07	0.00	0.00	0.00
11,800.00	90.00	0.00	5,793.00	5,545.79	472.46	5,564.86	0.00	0.00	0.00
11,900.00	90.00	0.00	5,793.00	5,645.79	472.46	5,664.64	0.00	0.00	0.00
12,000.00	90.00	0.00	5,793.00	5,745.79	472.46	5,764.42	0.00	0.00	0.00
12,100.00	90.00	0.00	5,793.00	5,845.79	472.46	5,864.21	0.00	0.00	0.00



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Razor #12H-0116B
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4968.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4968.00usft
<b>Site:</b>	Sec 12-T10N-R58W	<b>North Reference:</b>	True
<b>Well:</b>	Razor #12H-0116B	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	APD		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
12,200.00	90.00	0.00	5,793.00	5,945.79	472.46	5,963.99	0.00	0.00	0.00
12,300.00	90.00	0.00	5,793.00	6,045.79	472.46	6,063.77	0.00	0.00	0.00
12,400.00	90.00	0.00	5,793.00	6,145.79	472.46	6,163.56	0.00	0.00	0.00
12,500.00	90.00	0.00	5,793.00	6,245.79	472.46	6,263.34	0.00	0.00	0.00
12,600.00	90.00	0.00	5,793.00	6,345.79	472.46	6,363.13	0.00	0.00	0.00
12,700.00	90.00	0.00	5,793.00	6,445.79	472.46	6,462.91	0.00	0.00	0.00
12,800.00	90.00	0.00	5,793.00	6,545.79	472.46	6,562.69	0.00	0.00	0.00
12,900.00	90.00	0.00	5,793.00	6,645.79	472.46	6,662.48	0.00	0.00	0.00
13,000.00	90.00	0.00	5,793.00	6,745.79	472.46	6,762.26	0.00	0.00	0.00
13,100.00	90.00	0.00	5,793.00	6,845.79	472.46	6,862.04	0.00	0.00	0.00
13,200.00	90.00	0.00	5,793.00	6,945.79	472.46	6,961.83	0.00	0.00	0.00
13,300.00	90.00	0.00	5,793.00	7,045.79	472.46	7,061.61	0.00	0.00	0.00
13,400.00	90.00	0.00	5,793.00	7,145.79	472.46	7,161.40	0.00	0.00	0.00
13,425.76	90.00	0.00	5,793.00	7,171.56	472.46	7,187.10	0.00	0.00	0.00
TD at 13425.76' MD									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PBHL 0116B	0.00	0.00	5,793.00	7,171.56	472.46	1,565,597.45	3,468,791.15	40° 52' 25.100 N	103° 48' 17.440 W
- plan hits target center									
- Point									

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (in)	Hole Diameter (in)	
6,157.21	5,793.00	7"	7.000	8.750	

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,617.06	1,600.00	Upper Pierre				
3,547.23	3,500.00	Hygiene				
3,699.61	3,650.00	Lower Pierre				
5,801.16	5,676.00	P200 Marker				
5,853.58	5,707.00	P300 Marker				
5,880.05	5,721.00	P350 Marker				
5,898.34	5,730.00	Sharon Springs				
5,913.43	5,737.00	Niobrara				
5,967.94	5,759.00	Top A Chalk				



**WOG**  
Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Razor #12H-0116B
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4968.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4968.00usft
<b>Site:</b>	Sec 12-T10N-R58W	<b>North Reference:</b>	True
<b>Well:</b>	Razor #12H-0116B	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	APD		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
300.00	300.00	0.00	0.00	Build 3°/100'
638.10	636.33	-23.71	18.13	Hold 10.14° Inc
4,631.68	4,567.50	-582.43	445.27	Drop 2°/100'
5,138.82	5,072.00	-618.00	472.46	Hold Vertical
5,338.82	5,272.00	-618.00	472.46	KOP, Build 11°/100'
6,157.21	5,793.00	-97.00	472.46	LP @ 90° Inc, Hold
13,425.76	5,793.00	7,171.56	472.46	TD at 13425.76' MD