

US ROCKIES WATTENBERG PLANNING

WELD-NAD83-UTMFT13N

1N-66W-09 Highlands 1-9HZ Pad

HIGHLANDS 1N-33HZ

Plan A

Plan: Permit Rev-1

Sperry Drilling Services Proposal Report

18 May, 2015

Well Coordinates: 14,553,072.89 N, 1,702,953.93 E (40° 04' 19.62" N, 104° 46' 35.25" W)

Ground Level: 4,998.00 usft

Local Coordinate Origin:

Centered on Well HIGHLANDS 1N-33HZ

Viewing Datum:

RKB = 17' @ 5015.00usft (D Rig)

TVDs to System:

N

North Reference:

True

Unit System:

Dec-Deg - API - US Survey Feet - Custom

Version: 5000.1 Build: 70

HALLIBURTON

Project: WELD-NAD83-UTMFT13N

Site: 1N-66W-09 Highlands 1-9HZ Pad

Well: HIGHLANDS 1N-33HZ

Wellbore: Plan A

Design: Permit Rev-1

US ROCKIES WATTENBERG PLANNING

HALLIBURTON



Sperry Drilling

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	1250.00	0.00	0.00	1250.00	0.00	0.00	0.00	0.00	0.00	
3	1916.67	10.00	109.00	1913.29	-18.89	54.87	1.50	109.00	-19.65	
4	3666.67	10.00	109.00	3636.70	-117.83	342.20	0.00	0.00	-122.53	
5	4166.67	0.00	0.00	4134.17	-132.00	383.35	2.00	180.00	-137.27	
6	6748.55	0.00	0.00	6716.05	-132.00	383.35	0.00	0.00	-137.27	
7	7647.04	89.85	359.21	7289.00	439.40	375.51	10.00	359.21	434.18	
8	12952.95	89.85	359.21	7303.00	5744.79	302.69	0.00	0.00	5740.07	HIGHLANDS 1N-33HZ_BHL

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude
HIGHLANDS 1N-33HZ_SHL	0.00	0.00	0.00	40.072117	-104.776458
HIGHLANDS 1N-33HZ_BHL	7303.00	5744.79	302.69	40.087893	-104.775376

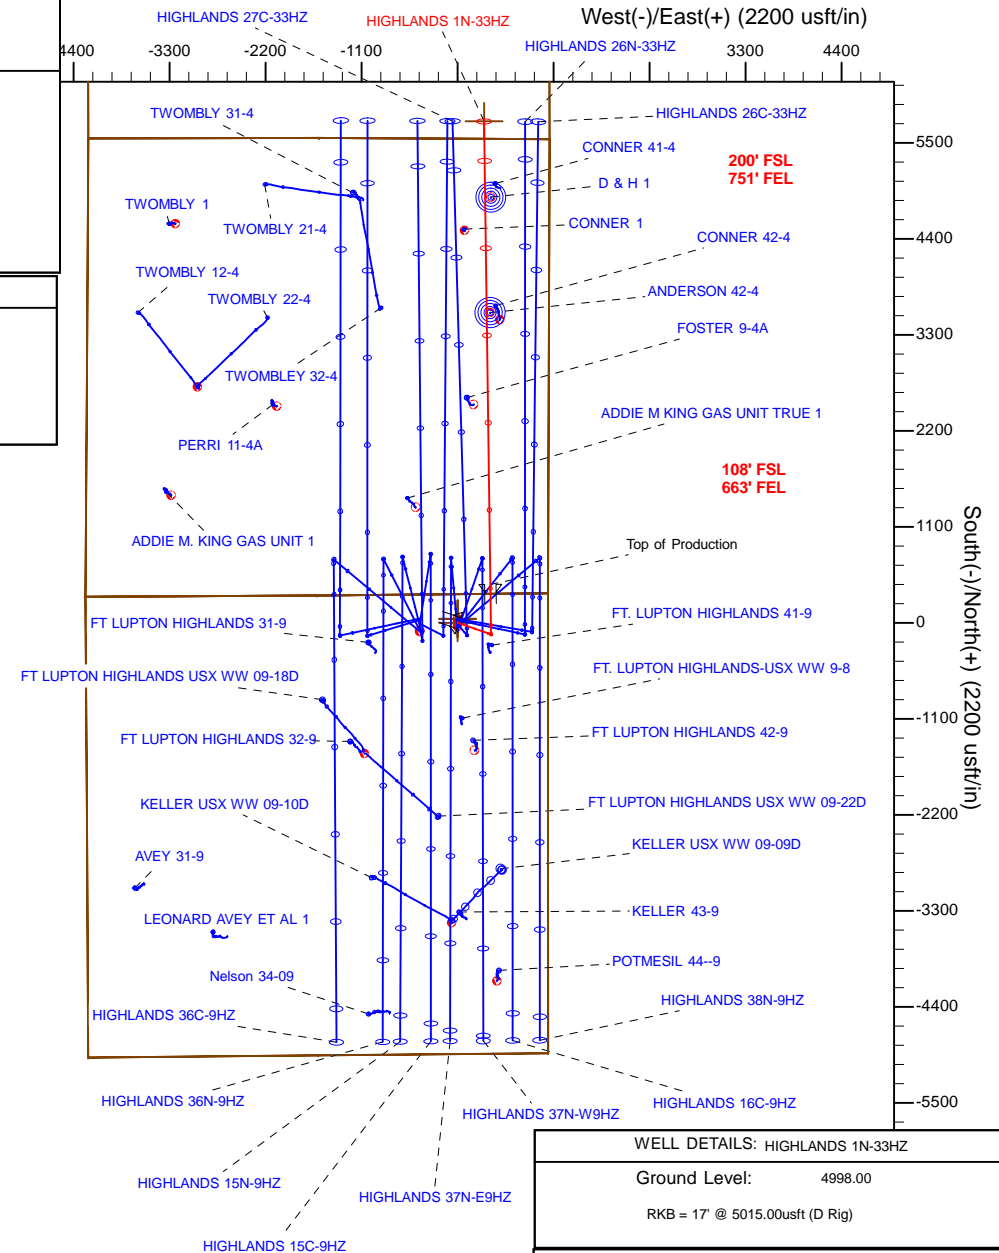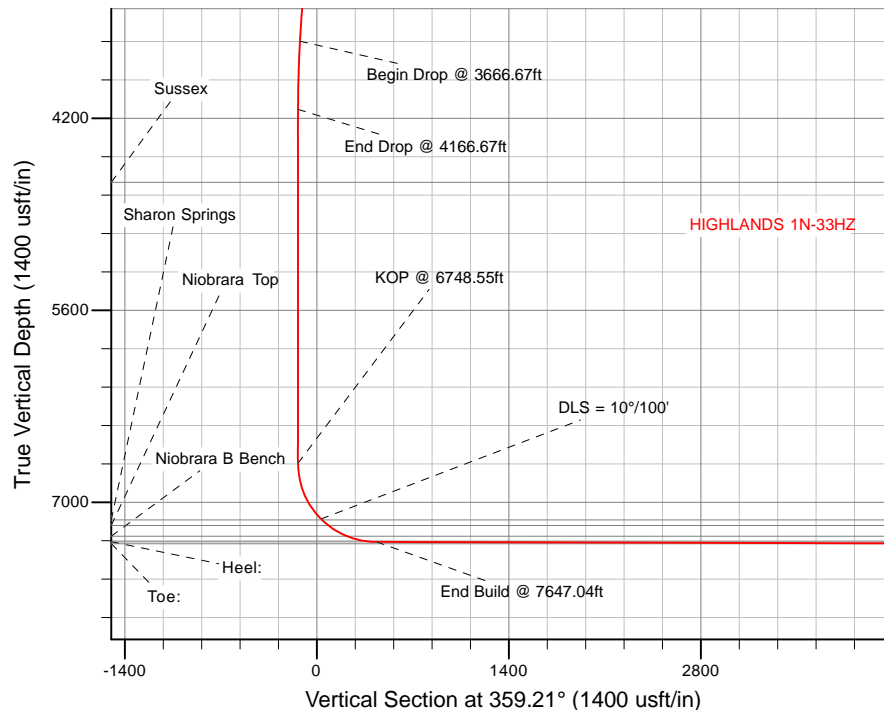

WELL DETAILS: HIGHLANDS 1N-33HZ

Ground Level: 4998.00

RKB = 17' @ 5015.00usft (D Rig)

Plan: Permit Rev-1 (HIGHLANDS 1N-33HZ/Plan A)

Created By: Clint Eshelman

Date: 5/19/2015

Reviewed:

Date:

Plan Report for HIGHLANDS 1N-33HZ - Permit Rev-1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1N-R66W-Sec. 9_Section Lines - HIGHLANDS 1N-33HZ_SHL - 2N-R66W-Sec. 33_Section Lines - 1N-R66W-Sec. 4_Section Lines										
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,250.00	0.00	0.00	1,250.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin Nudge @ 1250.00ft										
1,300.00	0.75	109.00	1,300.00	-0.11	0.31	-0.11	1.50	1.50	0.00	109.00
1,400.00	2.25	109.00	1,399.96	-0.96	2.78	-1.00	1.50	1.50	0.00	0.00
1,469.12	3.29	109.00	1,469.00	-2.05	5.94	-2.13	1.50	1.50	0.00	0.00
Fox Hills										
1,500.00	3.75	109.00	1,499.82	-2.66	7.73	-2.77	1.50	1.50	0.00	0.00
1,600.00	5.25	109.00	1,599.51	-5.22	15.15	-5.43	1.50	1.50	0.00	0.00
1,600.49	5.26	109.00	1,600.00	-5.23	15.19	-5.44	1.50	1.50	0.00	0.00
9 5/8"										
1,700.00	6.75	109.00	1,698.96	-8.62	25.03	-8.96	1.50	1.50	0.00	0.00
1,800.00	8.25	109.00	1,798.10	-12.87	37.38	-13.38	1.50	1.50	0.00	0.00
1,900.00	9.75	109.00	1,896.87	-17.96	52.17	-18.68	1.50	1.50	0.00	0.00
1,916.67	10.00	109.00	1,913.29	-18.89	54.87	-19.65	1.50	1.50	0.00	0.00
End Nudge @ 1916.67ft										
2,000.00	10.00	109.00	1,995.35	-23.60	68.55	-24.55	0.00	0.00	0.00	0.00
2,100.00	10.00	109.00	2,093.84	-29.26	84.97	-30.43	0.00	0.00	0.00	0.00
2,200.00	10.00	109.00	2,192.32	-34.91	101.39	-36.31	0.00	0.00	0.00	0.00
2,300.00	10.00	109.00	2,290.80	-40.56	117.81	-42.18	0.00	0.00	0.00	0.00
2,400.00	10.00	109.00	2,389.28	-46.22	134.23	-48.06	0.00	0.00	0.00	0.00
2,500.00	10.00	109.00	2,487.76	-51.87	150.64	-53.94	0.00	0.00	0.00	0.00
2,600.00	10.00	109.00	2,586.24	-57.52	167.06	-59.82	0.00	0.00	0.00	0.00
2,700.00	10.00	109.00	2,684.72	-63.18	183.48	-65.70	0.00	0.00	0.00	0.00
2,800.00	10.00	109.00	2,783.20	-68.83	199.90	-71.58	0.00	0.00	0.00	0.00
2,900.00	10.00	109.00	2,881.68	-74.48	216.32	-77.46	0.00	0.00	0.00	0.00
3,000.00	10.00	109.00	2,980.16	-80.14	232.74	-83.34	0.00	0.00	0.00	0.00
3,100.00	10.00	109.00	3,078.64	-85.79	249.16	-89.22	0.00	0.00	0.00	0.00
3,200.00	10.00	109.00	3,177.12	-91.45	265.58	-95.10	0.00	0.00	0.00	0.00
3,300.00	10.00	109.00	3,275.60	-97.10	281.99	-100.98	0.00	0.00	0.00	0.00
3,400.00	10.00	109.00	3,374.09	-102.75	298.41	-106.86	0.00	0.00	0.00	0.00
3,500.00	10.00	109.00	3,472.57	-108.41	314.83	-112.74	0.00	0.00	0.00	0.00
3,600.00	10.00	109.00	3,571.05	-114.06	331.25	-118.62	0.00	0.00	0.00	0.00
3,666.67	10.00	109.00	3,636.70	-117.83	342.20	-122.53	0.00	0.00	0.00	0.00
Begin Drop @ 3666.67ft										
3,700.00	9.33	109.00	3,669.56	-119.65	347.49	-124.43	2.00	-2.00	0.00	180.00
3,800.00	7.33	109.00	3,768.50	-124.37	361.19	-129.34	2.00	-2.00	0.00	180.00
3,900.00	5.33	109.00	3,867.88	-127.96	371.62	-133.07	2.00	-2.00	0.00	180.00
4,000.00	3.33	109.00	3,967.59	-130.42	378.77	-135.63	2.00	-2.00	0.00	180.00
4,100.00	1.33	109.00	4,067.51	-131.74	382.61	-137.01	2.00	-2.00	0.00	180.00
4,166.67	0.00	0.00	4,134.17	-132.00	383.35	-137.27	2.00	-2.00	0.00	-180.00
End Drop @ 4166.67ft										
4,200.00	0.00	0.00	4,167.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,267.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00

Plan Report for HIGHLANDS 1N-33HZ - Permit Rev-1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
4,400.00	0.00	0.00	4,367.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,467.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,567.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
4,698.50	0.00	0.00	4,666.00	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
Sussex										
4,700.00	0.00	0.00	4,667.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,767.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,867.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	4,967.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,067.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,167.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,267.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,367.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,467.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,567.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,667.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,767.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,867.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	5,967.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,067.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,167.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,267.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,367.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,467.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,567.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,667.50	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
6,748.55	0.00	0.00	6,716.05	-132.00	383.35	-137.27	0.00	0.00	0.00	0.00
KOP @ 6748.55ft										
6,800.00	5.15	359.21	6,767.43	-129.69	383.32	-134.96	10.00	10.00	0.00	359.21
6,900.00	15.15	359.21	6,865.74	-112.10	383.08	-117.37	10.00	10.00	0.00	0.00
7,000.00	25.15	359.21	6,959.50	-77.70	382.60	-82.97	10.00	10.00	0.00	0.00
7,100.00	35.15	359.21	7,045.87	-27.55	381.91	-32.82	10.00	10.00	0.00	0.00
7,200.00	45.15	359.21	7,122.21	36.83	381.03	31.57	10.00	10.00	0.00	0.00
DLS = 10°/100'										
7,209.87	46.13	359.21	7,129.12	43.89	380.93	38.63	10.00	10.00	0.00	0.00
Sharon Springs										
7,272.75	52.42	359.21	7,170.12	91.51	380.28	86.26	10.00	10.00	0.00	0.00
Niobrara Top										
7,300.00	55.15	359.21	7,186.22	113.49	379.98	108.24	10.00	10.00	0.00	0.00
7,400.00	65.15	359.21	7,235.93	200.10	378.79	194.86	10.00	10.00	0.00	0.00
7,428.39	67.98	359.21	7,247.23	226.15	378.43	220.91	10.00	10.00	0.00	0.00
Niobrara B Bench										
7,500.00	75.15	359.21	7,269.86	294.03	377.50	288.80	10.00	10.00	0.00	0.00
7,600.00	85.15	359.21	7,286.95	392.42	376.15	387.20	10.00	10.00	0.00	0.00
7,647.04	89.85	359.21	7,289.00	439.40	375.51	434.18	10.00	10.00	0.00	0.00
End Build @ 7647.04ft - Heel: - Top of Production										
7,700.00	89.85	359.21	7,289.14	492.35	374.78	487.14	0.00	0.00	0.00	0.00
7,800.00	89.85	359.21	7,289.41	592.34	373.41	587.14	0.00	0.00	0.00	0.00
7,900.00	89.85	359.21	7,289.67	692.34	372.03	687.14	0.00	0.00	0.00	0.00
8,000.00	89.85	359.21	7,289.93	792.33	370.66	787.14	0.00	0.00	0.00	0.00
8,100.00	89.85	359.21	7,290.20	892.32	369.29	887.14	0.00	0.00	0.00	0.00
8,200.00	89.85	359.21	7,290.46	992.31	367.92	987.14	0.00	0.00	0.00	0.00
8,300.00	89.85	359.21	7,290.72	1,092.30	366.54	1,087.14	0.00	0.00	0.00	0.00
8,400.00	89.85	359.21	7,290.99	1,192.29	365.17	1,187.14	0.00	0.00	0.00	0.00
8,500.00	89.85	359.21	7,291.25	1,292.28	363.80	1,287.14	0.00	0.00	0.00	0.00
8,600.00	89.85	359.21	7,291.52	1,392.27	362.43	1,387.14	0.00	0.00	0.00	0.00
8,700.00	89.85	359.21	7,291.78	1,492.26	361.06	1,487.14	0.00	0.00	0.00	0.00
8,800.00	89.85	359.21	7,292.04	1,592.25	359.68	1,587.14	0.00	0.00	0.00	0.00
8,900.00	89.85	359.21	7,292.31	1,692.24	358.31	1,687.14	0.00	0.00	0.00	0.00

Plan Report for HIGHLANDS 1N-33HZ - Permit Rev-1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
9,000.00	89.85	359.21	7,292.57	1,792.23	356.94	1,787.14	0.00	0.00	0.00	0.00
9,100.00	89.85	359.21	7,292.84	1,892.22	355.57	1,887.14	0.00	0.00	0.00	0.00
9,200.00	89.85	359.21	7,293.10	1,992.21	354.19	1,987.14	0.00	0.00	0.00	0.00
9,300.00	89.85	359.21	7,293.36	2,092.20	352.82	2,087.14	0.00	0.00	0.00	0.00
9,400.00	89.85	359.21	7,293.63	2,192.19	351.45	2,187.13	0.00	0.00	0.00	0.00
9,500.00	89.85	359.21	7,293.89	2,292.18	350.08	2,287.13	0.00	0.00	0.00	0.00
9,600.00	89.85	359.21	7,294.15	2,392.17	348.70	2,387.13	0.00	0.00	0.00	0.00
9,700.00	89.85	359.21	7,294.42	2,492.16	347.33	2,487.13	0.00	0.00	0.00	0.00
9,800.00	89.85	359.21	7,294.68	2,592.15	345.96	2,587.13	0.00	0.00	0.00	0.00
9,900.00	89.85	359.21	7,294.95	2,692.14	344.59	2,687.13	0.00	0.00	0.00	0.00
10,000.00	89.85	359.21	7,295.21	2,792.13	343.21	2,787.13	0.00	0.00	0.00	0.00
10,100.00	89.85	359.21	7,295.47	2,892.12	341.84	2,887.13	0.00	0.00	0.00	0.00
10,200.00	89.85	359.21	7,295.74	2,992.11	340.47	2,987.13	0.00	0.00	0.00	0.00
10,300.00	89.85	359.21	7,296.00	3,092.10	339.10	3,087.13	0.00	0.00	0.00	0.00
10,400.00	89.85	359.21	7,296.26	3,192.09	337.73	3,187.13	0.00	0.00	0.00	0.00
10,500.00	89.85	359.21	7,296.53	3,292.08	336.35	3,287.13	0.00	0.00	0.00	0.00
10,600.00	89.85	359.21	7,296.79	3,392.07	334.98	3,387.13	0.00	0.00	0.00	0.00
10,700.00	89.85	359.21	7,297.06	3,492.06	333.61	3,487.13	0.00	0.00	0.00	0.00
10,800.00	89.85	359.21	7,297.32	3,592.05	332.24	3,587.13	0.00	0.00	0.00	0.00
10,900.00	89.85	359.21	7,297.58	3,692.04	330.86	3,687.13	0.00	0.00	0.00	0.00
11,000.00	89.85	359.21	7,297.85	3,792.03	329.49	3,787.13	0.00	0.00	0.00	0.00
11,100.00	89.85	359.21	7,298.11	3,892.02	328.12	3,887.13	0.00	0.00	0.00	0.00
11,200.00	89.85	359.21	7,298.38	3,992.01	326.75	3,987.13	0.00	0.00	0.00	0.00
11,300.00	89.85	359.21	7,298.64	4,092.00	325.37	4,087.13	0.00	0.00	0.00	0.00
11,400.00	89.85	359.21	7,298.90	4,191.99	324.00	4,187.13	0.00	0.00	0.00	0.00
11,500.00	89.85	359.21	7,299.17	4,291.98	322.63	4,287.13	0.00	0.00	0.00	0.00
11,600.00	89.85	359.21	7,299.43	4,391.97	321.26	4,387.13	0.00	0.00	0.00	0.00
11,700.00	89.85	359.21	7,299.69	4,491.96	319.88	4,487.13	0.00	0.00	0.00	0.00
11,800.00	89.85	359.21	7,299.96	4,591.95	318.51	4,587.13	0.00	0.00	0.00	0.00
11,900.00	89.85	359.21	7,300.22	4,691.94	317.14	4,687.13	0.00	0.00	0.00	0.00
12,000.00	89.85	359.21	7,300.49	4,791.93	315.77	4,787.13	0.00	0.00	0.00	0.00
12,100.00	89.85	359.21	7,300.75	4,891.93	314.40	4,887.13	0.00	0.00	0.00	0.00
12,200.00	89.85	359.21	7,301.01	4,991.92	313.02	4,987.12	0.00	0.00	0.00	0.00
12,300.00	89.85	359.21	7,301.28	5,091.91	311.65	5,087.12	0.00	0.00	0.00	0.00
12,400.00	89.85	359.21	7,301.54	5,191.90	310.28	5,187.12	0.00	0.00	0.00	0.00
12,500.00	89.85	359.21	7,301.81	5,291.89	308.91	5,287.12	0.00	0.00	0.00	0.00
12,600.00	89.85	359.21	7,302.07	5,391.88	307.53	5,387.12	0.00	0.00	0.00	0.00
12,700.00	89.85	359.21	7,302.33	5,491.87	306.16	5,487.12	0.00	0.00	0.00	0.00
12,800.00	89.85	359.21	7,302.60	5,591.86	304.79	5,587.12	0.00	0.00	0.00	0.00
12,900.00	89.85	359.21	7,302.86	5,691.85	303.42	5,687.12	0.00	0.00	0.00	0.00
12,952.94	89.85	359.21	7,303.00	5,744.78	302.69	5,740.06	0.00	0.00	0.00	0.00
Toe:										
12,952.95	89.85	359.21	7,303.00	5,744.79	302.69	5,740.07	0.00	0.00	0.00	0.00
TD Well @ 12952.95ft - HIGHLANDS 1N-33HZ_BHL										

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,250.00	1,250.00	0.00	0.00	Begin Nudge @ 1250.00ft
1,916.67	1,913.29	-18.89	54.87	End Nudge @ 1916.67ft
3,666.67	3,636.70	-117.83	342.20	Begin Drop @ 3666.67ft
4,166.67	4,134.17	-132.00	383.35	End Drop @ 4166.67ft
6,748.55	6,716.05	-132.00	383.35	KOP @ 6748.55ft
7,200.00	7,122.21	36.83	381.03	DLS = 10°/100'
7,647.04	7,289.00	439.40	375.51	End Build @ 7647.04ft
12,952.95	7,303.00	5,744.79	302.69	TD Well @ 12952.95ft

Plan Report for HIGHLANDS 1N-33HZ - Permit Rev-1

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin +N/_S (usft)	Origin +E/-W (usft)	Start TVD (usft)
User	No Target (Freehand)	359.21	Slot	0.00	0.00	0.00

Survey tool program

From (usft)	To (usft)	Survey/Plan	Survey Tool
0.00	7,647.04	Permit Rev-1	APC_ISCWSA REV 2 MWD+IFR1
7,647.04	12,952.95	Permit Rev-1	APC_ISCWSA REV 2 MWD+IFR1

Casing Details

Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
1,600.49	1,600.00	9 5/8"	9-5/8	13-1/2
7,647.04	7,289.00	Top of Production	5-1/2	7-7/8

Formation Details

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,469.12	1,469.00	Fox Hills		0.00	
4,698.50	4,666.00	Sussex		0.00	
7,209.87	7,129.12	Sharon Springs		0.00	
7,272.75	7,170.12	Niobrara Top		0.00	
7,428.39	7,247.23	Niobrara B Bench		0.00	
7,647.04	7,289.00	Heel:		0.00	
12,952.94	7,303.00	Toe:		0.00	

Targets associated with this wellbore

Target Name	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Shape
1N-R66W-Sec. 9_Section Lines	0.00	45.15	0.28	Polygon
HIGHLANDS 1N-33HZ_BHL	7,303.00	5,744.79	302.69	Point
HIGHLANDS 1N-33HZ_SHL	0.00	0.00	0.00	Point
2N-R66W-Sec. 33_Section Lines	0.00	45.15	0.28	Polygon
1N-R66W-Sec. 4_Section Lines	0.00	45.15	0.28	Polygon

North Reference Sheet for 1N-66W-09 Highlands 1-9HZ Pad - HIGHLANDS 1N-33HZ - Plan A

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to True North Reference.

Vertical Depths are relative to RKB = 17' @ 5015.00usft (D Rig). Northing and Easting are relative to HIGHLANDS 1N-33HZ

Coordinate System is Universal Transverse Mercator (US Survey Feet), Zone 13N (108 W to 102 W) using datum North American Datum 1983, ellipsoid

Projection method is Transverse Mercator (Gauss-Kruger)

Central Meridian is -105.00°, Longitude Origin:0.000000°, Latitude Origin:0.000000°

False Easting: 1,640,416.67usft, False Northing: 0.00usft, Scale Reduction: 0.99960447

Grid Coordinates of Well: 14,553,072.89 usft N, 1,702,953.93 usft E

Geographical Coordinates of Well: 40° 04' 19.62" N, 104° 46' 35.25" W

Grid Convergence at Surface is: 0.14°

Based upon Minimum Curvature type calculations, at a Measured Depth of 12,952.95usft
the Bottom Hole Displacement is 5,752.76usft in the Direction of 3.02° (True).

Magnetic Convergence at surface is: -8.17° (12 May 2015, , IGRF2010)

