

NOBLE ENERGY INC.
HOSHIKO C02-08
SENE 2-4N-64W
1979' FNL & 656' FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
11/2/2015

API: 05-123-20167
 COGCC #


GL Elev: 4612'
 KB Elev: 4622'

Spud Date: 10/13/2001

Surface Casing :
 8 5/8" 24# @ 365'
 Cement: 260 sx
 TOC: Surface

TOC @ 6016'

Production Casing :
 4 1/2" 11.6# @ 7308'
 Cement: 250 sx
 TD: 10/20/2001

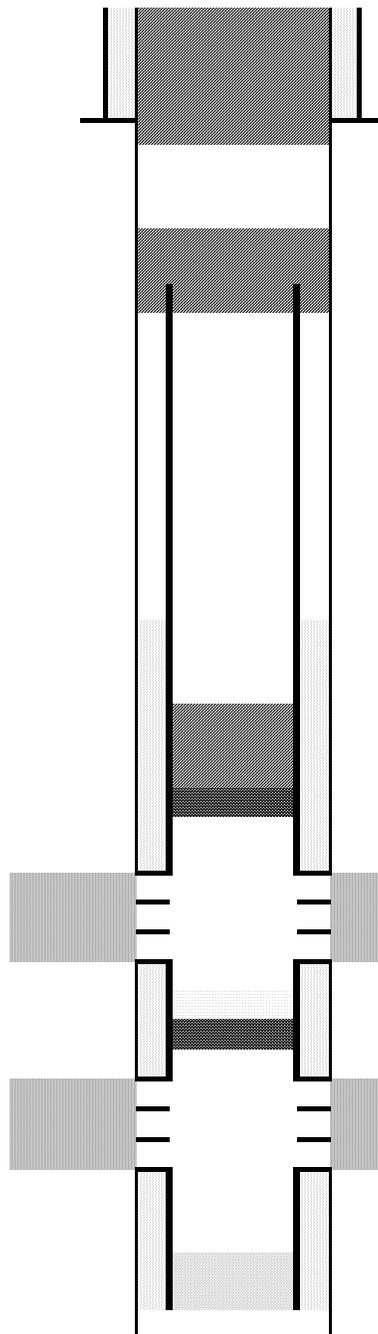

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 550'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 40 sx Balance Plug @ 6694'

CIBP @ 6694'

Codell Perforations 6744' - 6756'

CIBP @ 7050' w/ 2 sx cement on top (current)

J-Sand Perforations 7172' - 7230'

TD: 7310'