

**NOBLE ENERGY INC.**  
DOW 1-29  
SWMW 28-5N-63W  
2168' FNL & 494' FWL  
WELD COUNTY, CO  
Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
with PROPOSED P&A  
11/2/2015

API: 05-123-22549  
COGCC #

GL Elev: 4540'  
KB Elev: 4553'


**Spud Date:** 1/23/2005

**Surface Casing :**  
8 5/8" 24# @ 455'  
Cement: 420 sx  
TOC: Surface

**Production Casing Cement from 2600' - 4584'**

**TOC @ 5850'**

**Production Casing :**  
4 1/2" 11.6# @ 7789'  
Cement: 290 sx + 430 sx  
TD: 2/6/2005

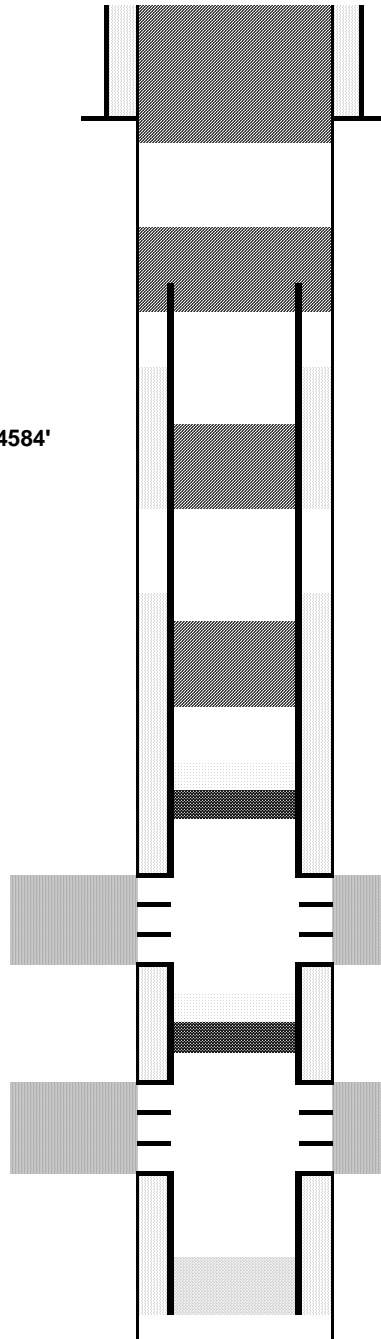

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 560'  
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
Cut and pull csg @ 2500'

Pump 25 sx Balance Plug @ 4500'

Pump 25 sx Balance Plug @ 6800'

CIBP @ 7309' w/ 2 sx cement on top

J-Sand Perforations 7359' - 7429'

CIBP @ 7595 w/ 2 sx cement on top and sand

Dakota Perforations 7662' - 7678'

TD: 7860'