

NOBLE ENERGY INC.
Wilmoth 6-14
SENE 6-4N-64W
1965 FNL & 654 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
11/4/2015

API: 05-123-20025
COGCC #

GL Elev: 4779'
KB Elev: 4789'


Spud Date: 9/17/2000

Surface Casing :
8-5/8" 24# J-55 @ 517' KB
Cement: 340 sx
TOC: Surface

TOC @ 206' KB (need to confirm with CBL)

Nio Log Top 6798' KB

Production Casing :
4-1/2" 11.6# @ 7180' KB
Cement: 610 sx
TD: 9/21/2000

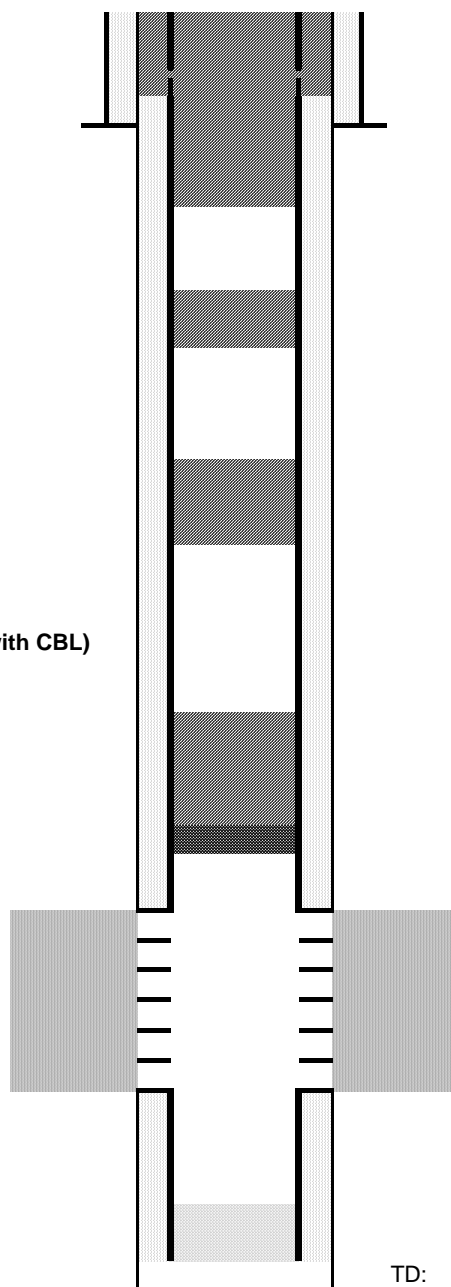

Cut surface casing off 6'-8' below surface.

Run CBL to confirm production csg cement top (~206')
Perforate 10' above cement top
Pump cement until cement to surface (~25 sx).
Pump cement down 4-1/2" through holes at ~200' back up :

Pump 20 sx balance/courtesy plug at 2500'

Pump 30 sx balance plug at 4530'

Pump 30 sx balance plug (to cover 200' over Nio)

CIBP @ 6986'

Codell Perforations: 7036'-7050'

TD: 7181' KB

surface casing until cement to surface (~35 sx)