

NOBLE ENERGY INC.
 Gerrity State G #36-17
 NWNE 36-4N-65W
 1283 FNL & 1397 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 1/4/2016

API: 05-123-22820


KB Elev: 4,841'
 GL Elev: 4,829'

Spud Date: 6/9/2005

Surface Casing :
 8 5/8", 24# @ 620'
 Cement: 645 sx
 TOC: Surface

TOC @ 3,552'

Production Casing :
 4 1/2", 11.60# @ 7,253'
 Cement: 160 sx
 Run Date: 6/12/2005

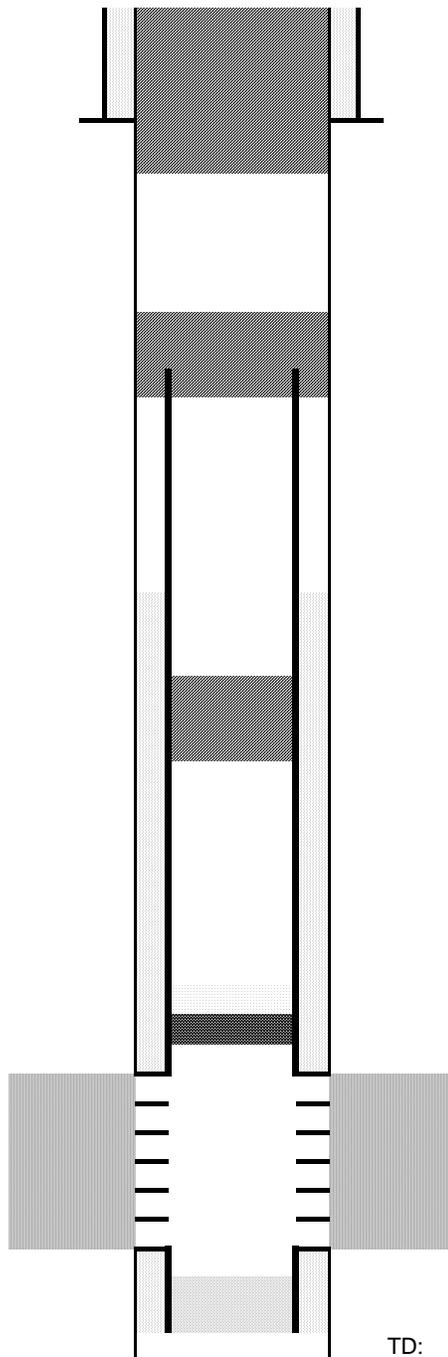

Cut surface casing off 6'-8' below surface.

Pump approx 262 sx shoe plug @ 720'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2,500'

Balance Plug @ 4,240' - 4,540'
 Pump 23 sx cement

CIBP @ 6,770' w/ 2 sx cement on top

Niobrara perforations: 6,820' - 6,902'

Codell perforations: 7,102' - 7,116'

TD: 7,253'

6770