

**NOBLE ENERGY INC.**  
 SITZMAN 12-33  
 NWSW 33-6N-64W  
 &  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 1/13/2016

API: 05-123-12465  
 COGCC #

GL Elev: 4632'  
 KB Elev: 4643'


**Spud Date:**

**Surface Casing :**  
 8-5/8" 24# @ 306'  
 Cement: 240  
 TOC: Surface

**TOC @ 6120'**

**Nio Top 6562'**

**Production Casing :**  
 4-1/2" 11.63 @ 6948'  
 Cement: 210  
 TD: 6/29/1985

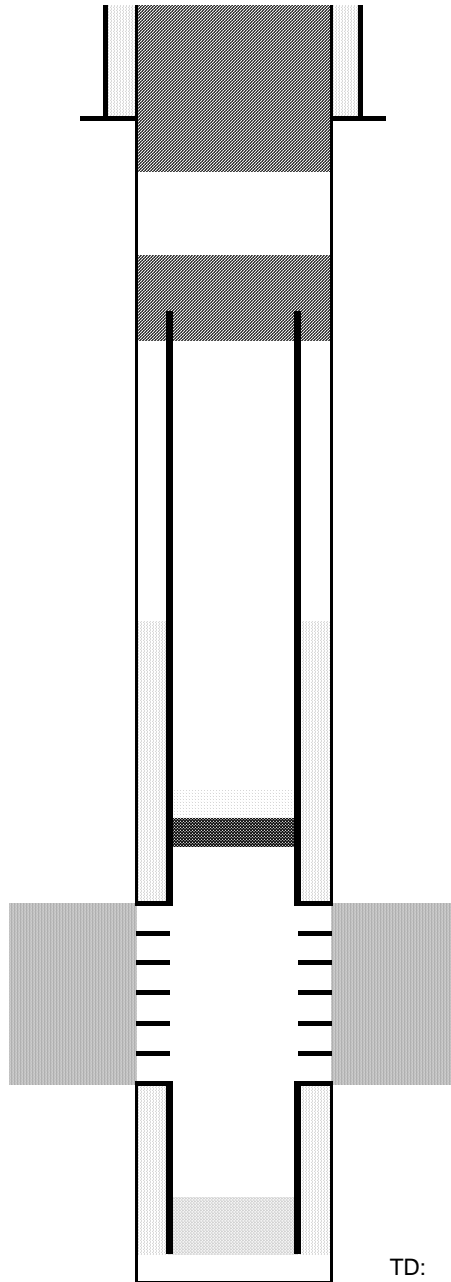

Cut surface casing off 6'-8' below surface.

Pump approx 240 sx shoe plug @ 670'  
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 6516' w/ 2 sx cement on top

Niobrara Perforations:  
 6566'-6576'; 6682'-6697';6753'-6775'

Codell Perforations: 6855'-6865'; 6856'-6868'

TD: 6958'