

NOBLE ENERGY INC.
 EHRlich 19-33
 NWSW 33-6N-64W
 1350 FSL & 1300 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 1/13/2016

API: 05-123-21983
 COGCC #

GL Elev: 4630'
 KB Elev: 4642'

Spud Date:

Surface Casing :


8-5/8" 24# @ 665'
 Cement: 470
 TOC: Surface

TOC @ 3000'

Nio Top 6567'

Production Casing :

4-1/2" 11.6# @ 7010'
 Cement: 420
 TD: 3/7/2004

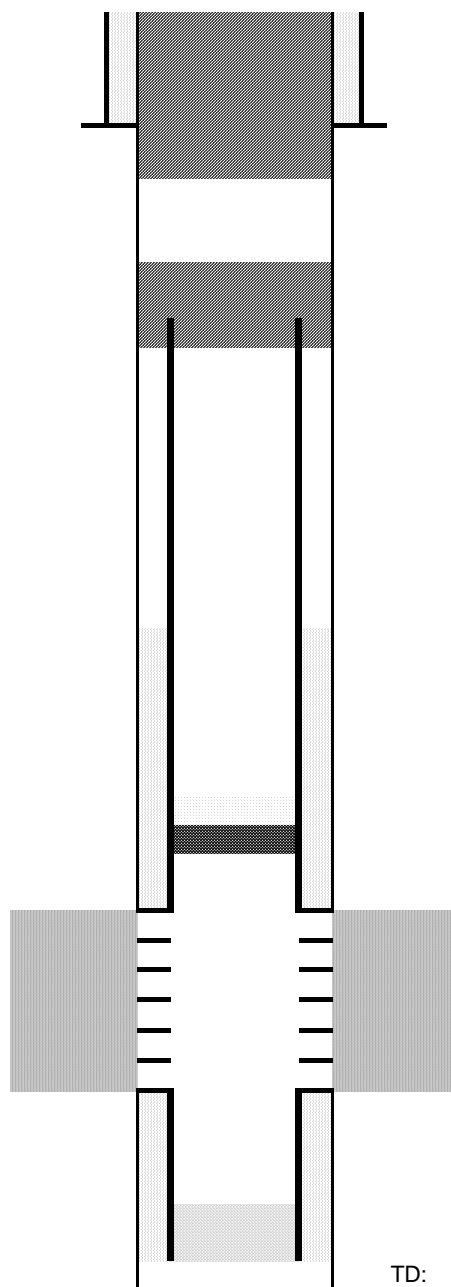

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug @ 766'
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6519' w/ 2 sx cement on top

Niobrara Perforations:
 6569'-6587'; 6570'-6585';
 6676'-6708'; 6677'-6721';
 Codell Perforations: 6862'-6876'

TD: 7020'