

**NOBLE ENERGY INC.**  
 Fritzler 22-22  
 SENW 22-4N-66W  
 1739 FNL & 1585 FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 1/14/2016

API: 05-123-16359

KB Elev: 4739'  
 GL Elev: 4729'


Spud Date: 11/5/1992

**Surface Casing :**  
 8 5/8", 24# @ 320'  
 Cement: 240 sx  
 TOC: Surface

TOC @ 4679'

TOC @ 6586'

**Production Casing :**  
 4 1/2", 11.6#, WC-70 @ 7337'  
 Cement: 310 + 220 sx  
 Run Date: 11/11/1992

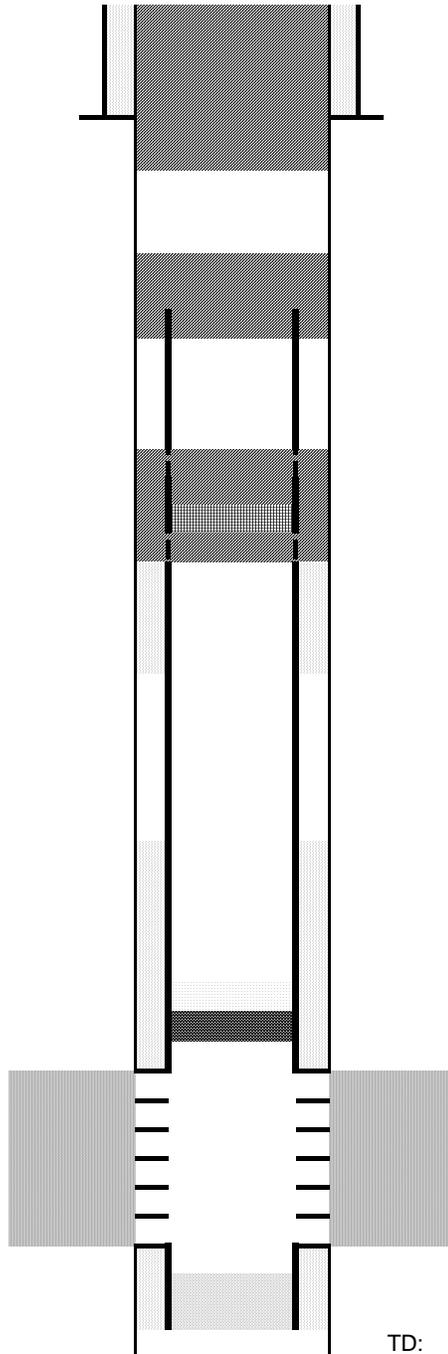

Cut surface casing off 6'-8' below surface.

Pump approx 140 sx shoe plug @ 420'  
 Will bring cement to surface

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

Perforate 4 1/2" casing @ 4210'  
 Pump 150 sx through and 30 sx on top  
 Set CICR @ 4575'  
 Perforate 4 1/2" casing @ 4675'

CIBP @ 6890' w/ 2 sx cement on top

Niobrara Perforations: 6940' - 7054'

Codell Perforations: 7238' - 7248'

TD: 7353'